




**NEW**  
**DEUCE**® COVER™  
 77% NYLON / 23% SPANDEX

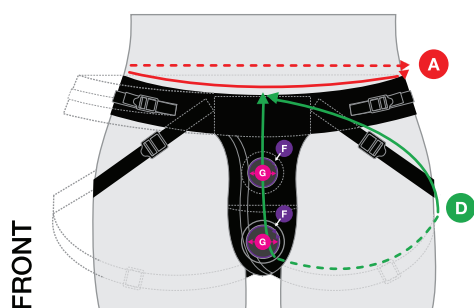


FRONT

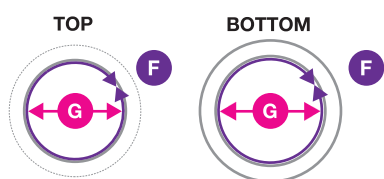

BACK

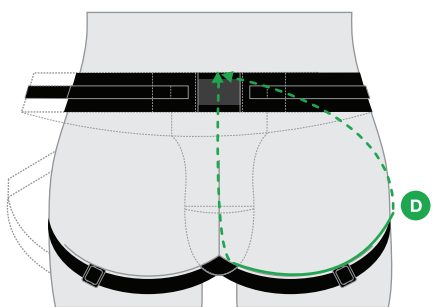

**TIP: Try our O-Stabilizer™ Ring** (available for individual purchase) for anchoring heavier attachments or attachments with small or flimsy bases. The O-Stabilizer™ keeps attachments close and prevents slips.



Fits Standard Mini Vibes (in) 2.5L x .75W  
 Fits Standard Mini Vibes (cm) 6.4L x 2W

Front Mesh Pouch / Pocket Opening (in) 9L x 4W  
 Front Mesh Pouch / Pocket Opening (cm) 22.8L x 10.2W

\* **Measurements below are with pants on, for public measuring, but if at home recommend doing measurements in underwear, as close to your body as possible, for accuracy, and best results.**

**A MEASURING THE WAISTBAND - (Stand with feet together) Find where you will be wearing your harness belt, or where you would wear a standard belt, just below your hip bone.** Wrap a measuring tape around your selected area, where it crosses over itself is you're **A Waistband measurement, (Recommended to Add 3-4 inches to your measurement so you have flexibility for adjustments and weight fluctuation).** Jot it down. Once measured, place your own belt, or appropriate sizing belt (when doing measurements in store and where available) over that same location to get ready for the second **D measurement.**

If you are not sure where to wear the harness, and or need help finding how to find your Waistband location, try one of the two Options below: (Stand with feet together for all steps)

**OPTION 1: If you are already wearing standard-cut pants (not high or low-cut pants) try this step:**

- i. If you're already wearing a belt, slide it down and measure where it originally was. **Do not measure over the belt itself, as your result will be too large. (See above for how to do measurement). Jot down the A measurement.**
- ii. Next slide your pants and belt back up (if wearing pants). Make sure, the pants are hiked up all the way in the crotch area (so you get the closest measurement possible), but that the waistband still sits naturally, in the original position, this is so things are in the correct locations for doing the **D Upper thigh measurement.**

**OPTION 2: Using your hipbone to find your Waistband location:**

- i. Find the top of the hipbone by bending to the side, as if doing a side stretch. Place your finger, pointing upward, on the very top of the hipbone.
- ii. **Measure 2(in) 5(cm)** down from your finger on hipbone, using another finger to mark the new spot; this is the waistband area.
- iii. **Measure the waistband area** (now see above for how to do measurement **A**).

**D MEASURING UPPER THIGH (LEG STRAP) - Stand with feet apart (for steps i/ii), then together, and flex leg for (steps iii/iv).**

- i. (With your belt in place for your **A Waistband location/** where you'll wear the harness) Start your measurement at the center of the belt, in line with your belly button.
- ii. Slide the tape measure between your legs and wrap it around the back of your leg, below the butt cheek. Bring the tape measure back around to the front of the belt, where you started. Be sure that it's wrapped fully and tautly around your (flexed) leg, but not so taut that it is in anyway restrictive. (You need to flex leg when measuring, so you have room in leg straps for movement, when wearing and using product).
- iii. Mark the number where the tape measure completes and crosses over itself, that will be your **D measurement,** jot it down.

\*\* Lastly Check the Bottom C-Ring Circumference opening, and make sure that even erect, it is more than enough for your penis girth, without restriction.

**SELECTING YOUR SIZE,** take both of your measurements **A** & **D** and find below, the smallest size that contains all of your measurements, and that is your correct size for the Deuce® Cover™.

	Size A	Size B
<b>A</b> Waistband (in) Waistband (cm)	20 - 50 51 - 127	35 - 65 89 - 165
<b>D</b> Upper Thigh (in) Upper Thigh (cm)	27 - 33 69 - 84	30 - 40 76 - 102
<b>F</b> Circumference (in) Circumference (cm)	5 - 7 13 - 18	<b>F</b> Bottom C-Ring Circumf. (in) Bottom C-Ring Circumf. (cm) 6.25 - 7.75 16 - 18
<b>G</b> Diameter (in) Diameter (cm)	1.25 - 2.25 3 - 6	<b>G</b> Bottom C-Ring Diameter (in) Bottom C-Ring Diameter (cm) 2 - 3 5 - 8

Please confirm sizes before purchase.

**SPAREPARTS**®  
 ©2023 SPAREPARTS HARDWEAR LLC V11.05.23