




2503MFRMHW
1/2 Drive, 30-250 Ft. Lb. Micro-Adjustable Torque Wrench - Metal Handle







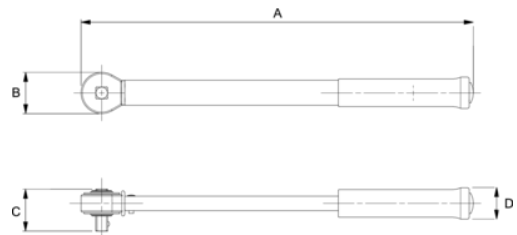


PRODUCT DETAILS

- Dual scale, calibrated clockwise only
- Positive lock with spring loaded pull down lock ring
- Fast, accurate and easy to set
- Easy-to-read laser marked scales
- 1/4", 3/8", 1/2" drive feature quick release buttons which provide good socket retention as well as easy socket retention
- Accuracy: $\pm 3\%$ CW of indicated value, CW from 20% to 100% of full scale
- Meets or exceeds ASME standards, ISO 6789 standards
- Individually serialized with matching certificate of calibration traceable to N.I.S.T



PRODUCT ATTRIBUTES

Product: **2503MFRMHW**

	1 ozf.in		1.4 lbf.in		
 lbf·ft	30-250 lbf·ft	 N·m	47-332 N·m	 lb	3.15 lb
	1/2 in	A	24.3 in	B	1.592 in
C	0.904 in	D	1.4 in	