



Technical Specifications

55178

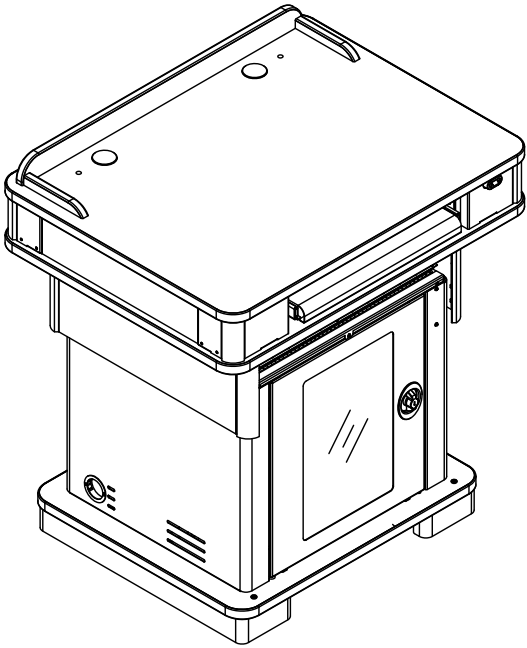

Honors with surround  
(shown extended)

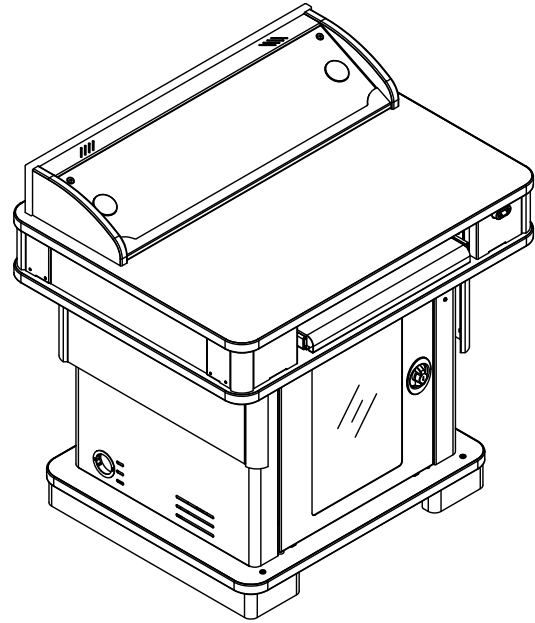

Honors with overbridge  
(shown retracted)

Use the Honors Lectern where worksurface height adjustment, and rack rail equipment storage is required. Electric actuators provide worksurface height adjustment from 34"-42". The lectern is available with a surround, or an overbridge. Rack cabinet can be integrated with electronics off-site then installed into the lectern when ready. Additional options like flip-up shelf, customized logo panels, and power module are available.

Features and Benefits


- Electric adjustable-height worksurface adjusts between varying seated or standing-use heights (34"-42"H)
- Scratch and impact-resistant high-pressure laminate top provides a durable, useful worksurface
- Surround on worksurface provides privacy and styling (surround version)
- Pull-out worksurface / keyboard tray with wiring slots supports large keyboards up to 20" wide with mouse
- Overbridge version with blank panel allows custom cutouts and installation of electronics (overbridge version only)
- Pre-drilled monitor arm mounting holes allow installation of a monitor arm (surround version only)
- 3" swivel Twin-Wheel (TW) casters provide mobility (2 locking)
- 2" grommet in each lower side panel provide cord access
- Cable grommets throughout provide cable access
- Replaceable base skirt panels hide casters (customer-installed)
- Ventilated side panels keep equipment cool
- Instructor side acrylic door provides monitoring of internal equipment, security, and can be removed via quick-release to provide full-access to rack equipment. Door can be installed to hinge from the left or right side of the lectern.
- Removable, locking audience-side panel provides access to internal equipment
- Optional removable cube rack-rail mounting (12RU front and 12RU rear) simplifies installation for any equipment configuration, provides mounting capabilities for multiple cooling fans, and provides the ability to integrate equipment remotely before being installed into the lectern at a later date
- Optional customizable logo panels (upper and lower) simplify adding or changing logos
- Optional flip-up shelf provides a convenient additional worksurface
- Durable powder coated steel chassis provides a long-lasting finish
- Warranted to be free of all defects in materials and workmanship for 10 years
- Designed and assembled in Chippewa Falls, WI, USA

Color Options

See [spectrumfurniture.com](http://spectrumfurniture.com) for complete color options and combinations.

# Construction



- The worksurface is constructed from 1" thick NAF (No Added Formaldehyde) composite board with .030" high-pressure laminate on one face, and a balancing phenolic backer on the opposing face
- Metal components consist of 16-gauge steel
- Worksurface edges are covered with 3mm vinyl
- All metal components are finished with a scratch-resistant powder coat epoxy
- Solid wood corner trim
- Each Honors Lectern ships assembled with casters on its own skid. Customer-installed base skirt.



# Specifications

Worksurface height adjustability (floor to top of worksurface)	42"H [106.7 cm] (fully-raised) 34"H [86.4 cm] (fully-lowered)
Total lower internal area (nominal)	19.741"W [50.1 cm] x 21.439"D [54.5 cm] x 21.735"H [55.2 cm]
Optional rack cube	12RU
Keyboard tray	<ul style="list-style-type: none"> <li>• 20"W [50.8 cm] x 11.625"D [29.5 cm] x 1"H [2.54 cm] - 2.375" [cm]</li> <li>• Pulls out 7.937" [20.2 cm]</li> <li>• Can be flipped and used as a drawer</li> </ul>
3" Twin Wheel casters	Weight capacity 165 lb [74.9 kg] each
Electrical	<ul style="list-style-type: none"> <li>• Range of motion: 8" [20.3 cm]</li> <li>• ~10 seconds from fully-lowered to fully-raised</li> <li>• Inverter: 120V @ 60Hz, max output 300 watts</li> <li>• Motors: 18V / 10 amps</li> <li>• Typical electrical load during operation: <u>4.3 amps @ 120 VAC</u></li> <li>• Anti-collision protection</li> </ul> <ul style="list-style-type: none"> <li>• 11' [335 cm] nominal 3-wire power cord</li> <li>• Max load: 1200N (270 lb) [122.6 kg] per actuator total lift capacity: 540 lb [245 kg]</li> <li>• Actuators feature non-hydraulic, permanently lubricated screw jacks</li> <li>• Actuators rated for 20,000 cycles</li> <li>• Approved according to EN 60335-1 and UL 962</li> </ul>
Unit weights (nominal)	280 lb [127.1 kg]
Shipping weights (nominal)	335 lb [152 kg]

*Specifications subject to change without notice*

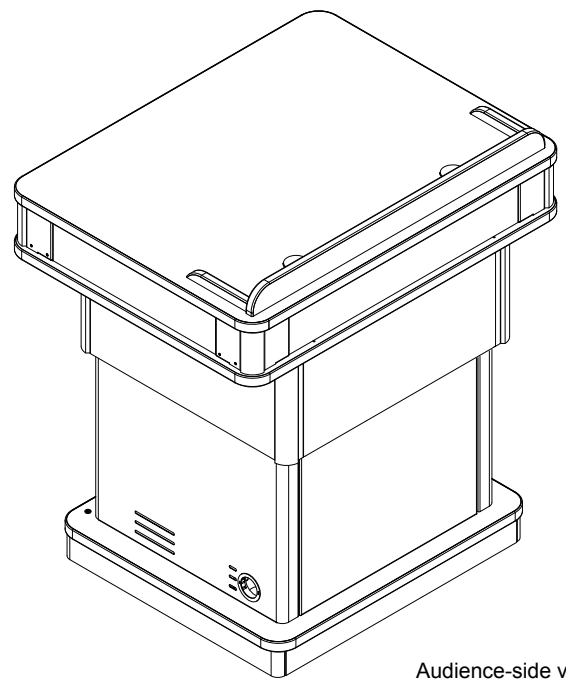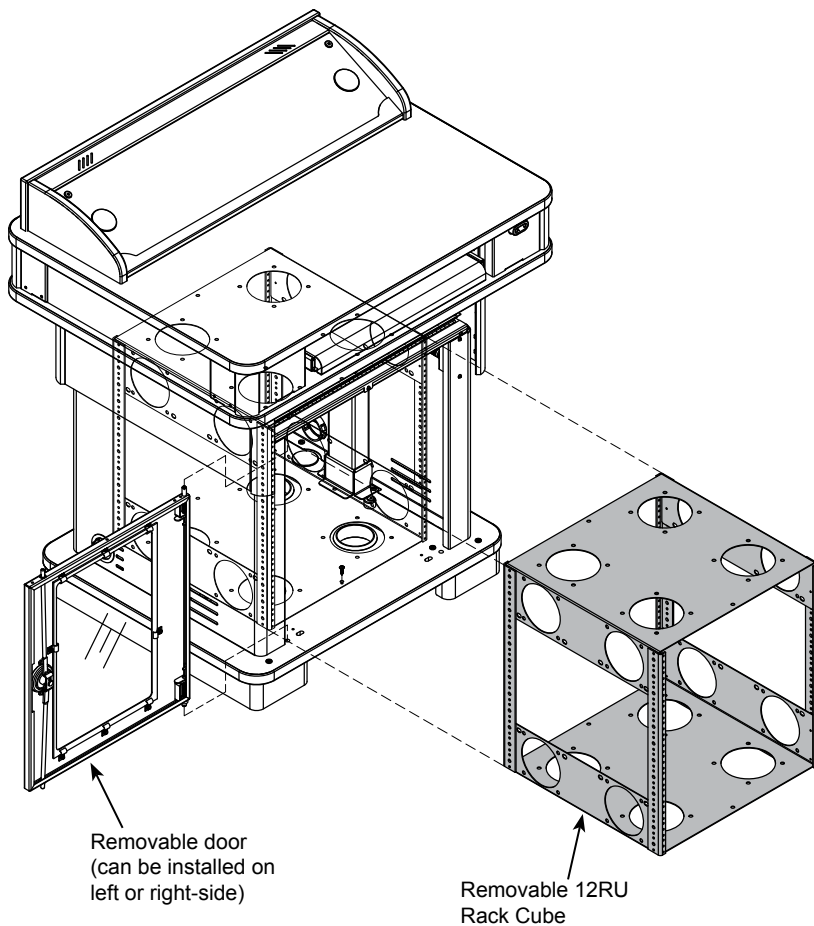


Audience-side view


Note: The Honors Lectern is not designed for use with cord reels or surface-mount cord reel accessories.

Note: Approximately 1RU at the top of the rack cube is not fully-accessible from the audience-side. The rack cube can be fully-accessed from the instructor-side door.


Upper logo panel

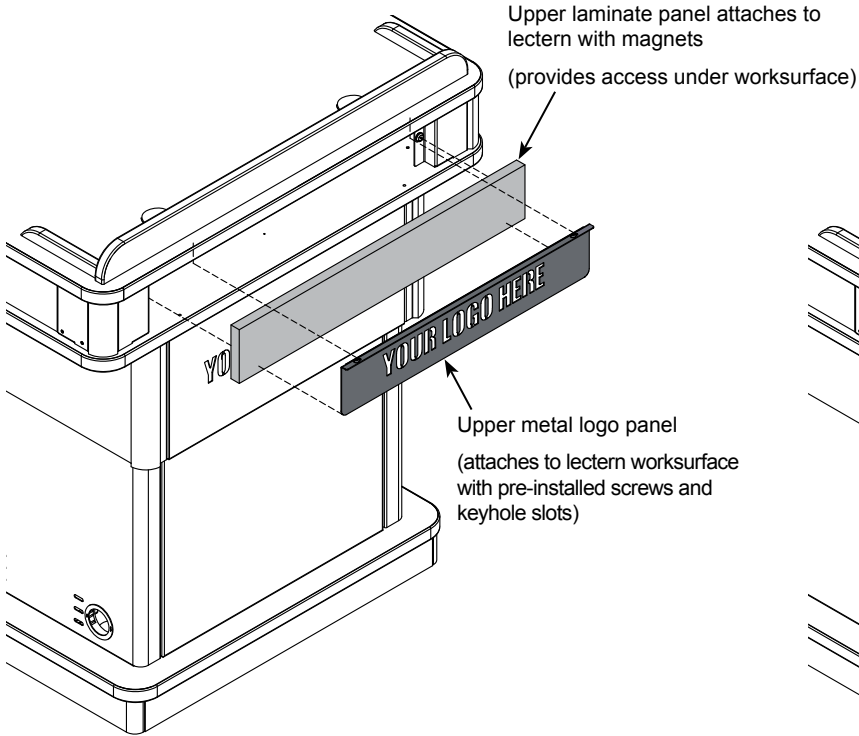


Lower logo panel

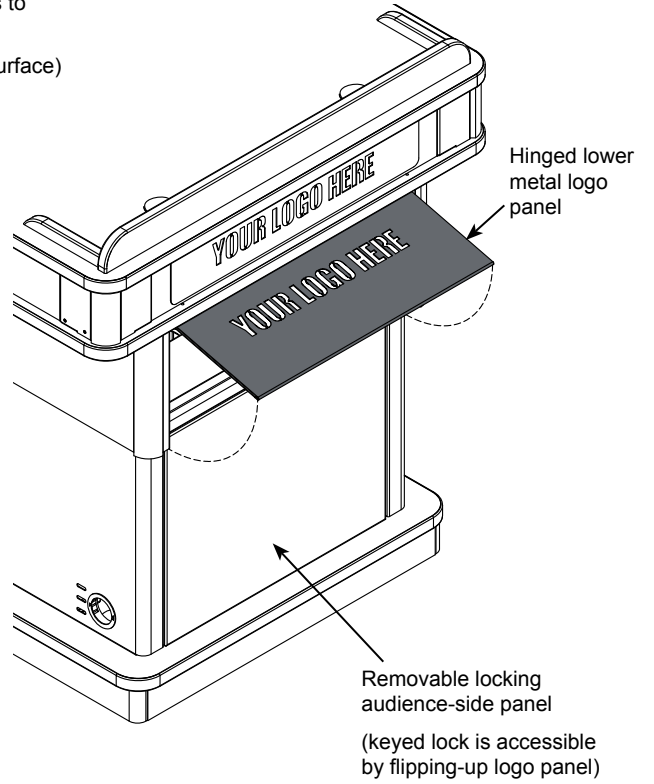

Bottom view

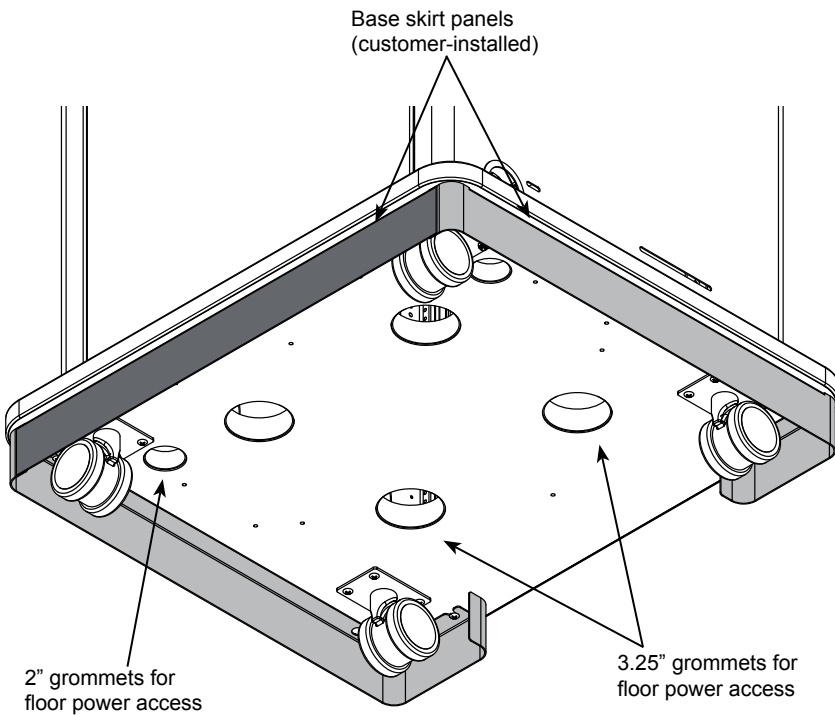

3" Twin-Wheel caster (TW)

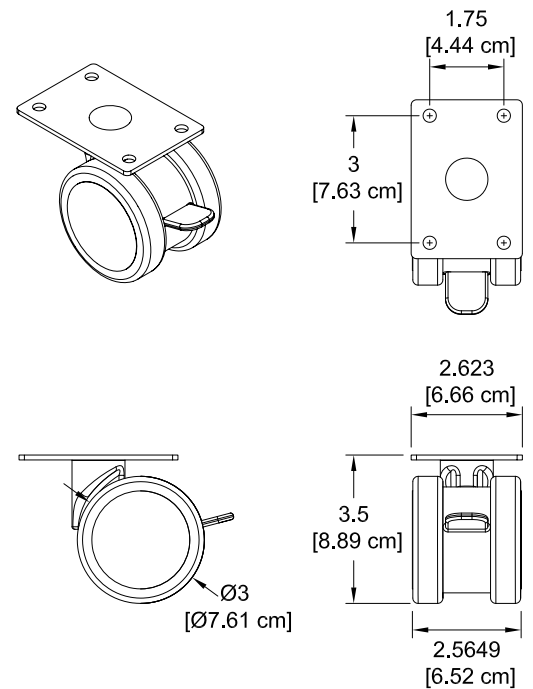

# Configured Number Breakdown

**55178 - FM FM B S1 2 4 5 1 S 0**

**Parent Number**

**Custom Cutout:** (Contact Spectrum with details)

- 0 = None
- 2 = Yes-in worksurface
- 3 = Yes-in overbridge panel

**Cove™ Power Module Color:**

- 0 = None
- B = Black
- S = Silver

**Cove™ Power Module:** (Centered on surround models only)

- 0 = None
- 1 = One Cove Power Module

**Customized Logo Panels:** (Matching metal color)

- 0 = None
  - 1 = Upper panel
  - 2 = Lower panel
  - 3 = Upper and Lower panel
  - 4 = Upper panel
  - 5 = Lower panel
  - 6 = Upper and Lower panels
  - 7 = Upper panel
  - 8 = Lower panel
  - 9 = Upper and Lower panels
- (Matching laminate backer)
- (White laminate backer)
- (Black laminate backer)

**Rack Cube:**

- 0 = None
- 4 = Yes

**Flip-Up Shelf:** (Matching laminate)

- 0 = None
- 2 = Yes - Shelf on right
- 3 = Yes - Shelf on left
- 4 = Yes - Shelf on right and left (2 shelves)

**Lectern Style:**

- S1 = Surround
- B1 = Overbridge

**Metal Color:**

- B = Black
- CM = Champagne Metallic
- D = Dark Gray
- S = Silver Sparkle

	Laminate Color:†	Edgeband Color:
Standard Laminates	FM = Fusion Maple	FM = Fusion Maple
	IO = Indigo Organix	BK = Black ( <i>non-matching</i> )
	CH = Wild Cherry	CH = Wild Cherry
Premium Laminates* (28-day lead time)	BK = Black	BK = Black
	BL = Bronze Legacy	BL = Bronze Legacy
	CK = Castle Oak	CK = Castle Oak
	CW = Colombian Walnut	CW = Colombian Walnut
	DZ = Desert Zephyr	DZ = Desert Zephyr
	EM = Empire Mahogany	EM = Empire Mahogany
	MO = Morro Zephyr	MO = Morro Zephyr
	MZ = Misted Zephyr	SN = Silver Northsea ( <i>non-matching</i> )
	NP = Nepal Teak	NP = Nepal Teak
	NT = Natural Tigris	NT = Natural Tigris
	PM = Pewter Mesh	PM = Pewter Mesh
	SM = Steel Mesh	SM = Steel Mesh
	TZ = Twilight Zephyr	TZ = Twilight Zephyr
	WF = White Fiesta	BK = Black ( <i>non-matching</i> )
	WD = White Chalk Dry Erase	(Matches Laminate Color)

Note: White Chalk Dry Erase laminate is only available on the flip-up shelf option-not the worksurface.


Note: Flip-up shelves configured with white laminate will have the same edgeband color as the worksurface and base panel.

**All configured options are factory-installed unless noted otherwise.**

\* Premium laminate colors require an additional 14 days of lead time.


† Laminate colors come with matching edgeband color, with these exceptions: Indigo Organix Laminate comes with Black edgeband, Misted Zephyr Laminate comes with Silver Northsea edgeband, and White Fiesta Laminate comes with Black edgeband.

Worksurface Style

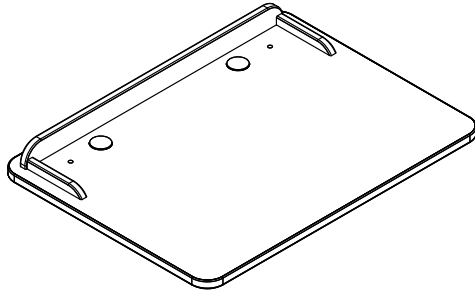

**ORDER CODE S1 =** Surround


- Surround
- Two 2" grommets (with covers)
- Two .375" holes (with plugs) for worksurface monitor arm mounting

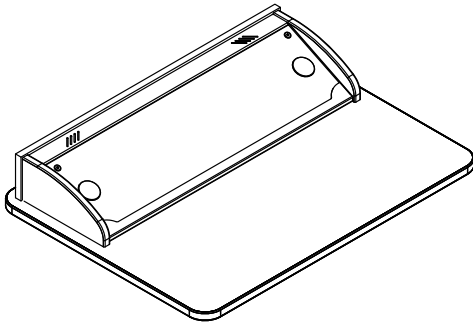

**ORDER CODE B1 =** Overbridge Control Console™

- Overbridge with blank insert panel for custom cutouts (see p.11 for dimensions). (Overbridge not available separately)
- Two 2" grommets (with covers)

Flip-Up Shelf

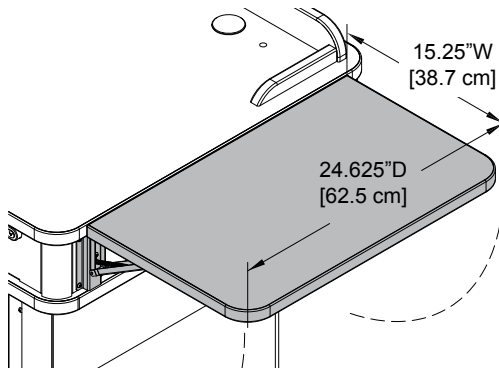

**Flip-Up Shelf**

- Shelf hinges lock into place in the upright position
- Level with worksurface

Weight capacity: 35 lb [15.9 kg]


Dimensions: 15.25"W [38.7 cm] x 24.625"D [62.5 cm] x 1"H [2.54 cm]

Note: Power and communication wiring for document cameras, laptop computers, and/or projectors placed on the flip-up shelf should be routed on top of the audience-side of the shelf. Use of the shelf grommet hole for wiring will result in pinching of the cords when the shelf is folded.


<b>ORDER CODE 0 =</b>	None
<b>ORDER CODE 4 =</b>	On both sides (two shelves)

**ORDER CODE 3 =** On Left (one shelf)

**ORDER CODE 2 =** On Right (one shelf)

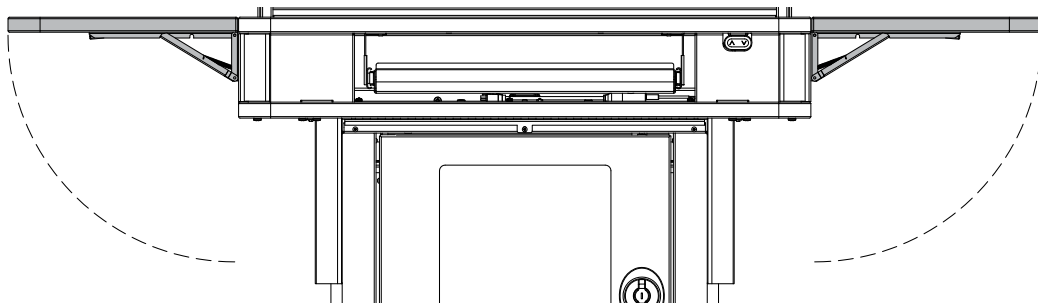

12RU Rack Cube

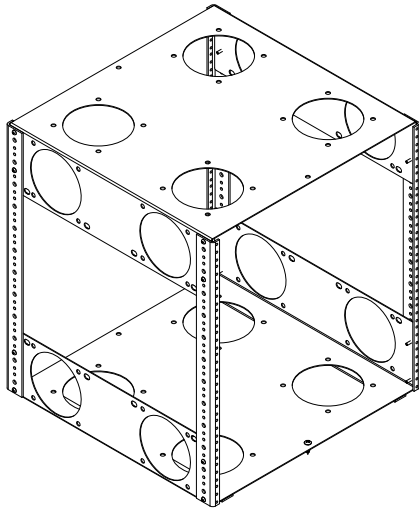

<b>ORDER CODE 0 =</b>	None
<b>ORDER CODE 4 =</b>	Yes

**12RU Rack Cube**


- One rack cube can be installed into the Honors Lectern
- Polyethylene slides on bottom for easy removal
- Can be secured to base panel
- Compatible with most 4.75" cooling fans
- Color: black
- Factory-installed

Rack rail:	12RU front and rear
Dimensions:	19.125"W [48.58 cm] x 19.031"D [48.34 cm] x 21.25"H [53.97 cm]
Mounts for cooling fans:	Compatible with most 4.75" fans with 4.13" mounting hole spacing (12 mounting locations available)
Unit weight:	25 lb [11.4 kg]

Note: If rack rail mounting is needed in the lectern, the rack cube must be specified. The lectern does not provide any rack-mount capabilities without the cube.



Customized Logo Panel(s)

<b>ORDER CODE 0 =</b> None	
<b>ORDER CODE 1 =</b> Upper panel	Matching laminate backer
<b>ORDER CODE 2 =</b> Lower panel	
<b>ORDER CODE 3 =</b> Upper and Lower panel	
<b>ORDER CODE 4 =</b> Upper panel	White laminate backer
<b>ORDER CODE 5 =</b> Lower panel	
<b>ORDER CODE 6 =</b> Upper and lower panels	
<b>ORDER CODE 7 =</b> Upper panel	Black laminate backer
<b>ORDER CODE 8 =</b> Lower panel	
<b>ORDER CODE 9 =</b> Upper and lower panels	



**Customized Upper Logo Panel**

- Attaches to audience-side of lectern
- 21.58"W [54.81 cm] x 2.89"H [7.33 cm]
- To get panel customized-contact Spectrum for details
- New logos require a first time logo charge
- Factory-installed

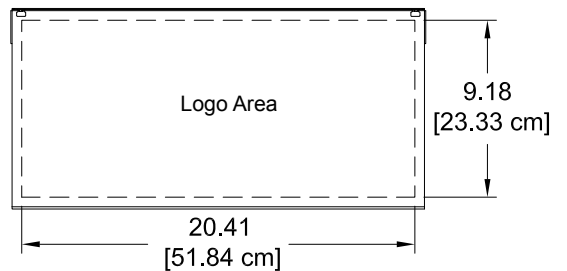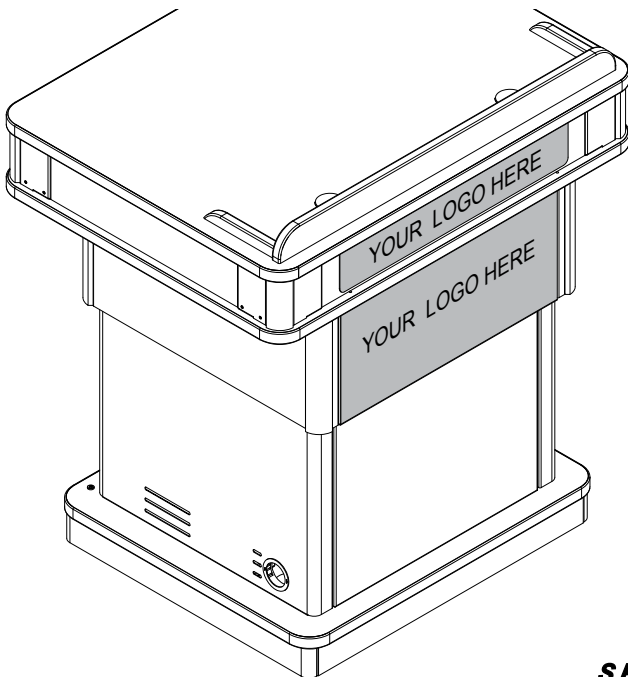

**Customized Lower Logo Panel**


- Attaches to audience-side of lectern
- 20.41"W [51.84 cm] x 9.18"H [23.33 cm]
- To get panel customized-contact Spectrum for details
- New logos require a first time logo charge
- Factory-installed

Cove™ Power Module


ORDER CODE 0 =	None
ORDER CODE 1 =	Yes

Cove™ Power Module

- Two power receptacles
- Two USB charge ports (not data-compatible)
- Thumbscrew clamps
- Requires worksurface cutout
- ETL listed
- Available in Black or Silver



Cutout required:	5.25"W [13.3 cm] x 2"D [5.1 cm] (mounts to surface thicknesses up to 1.5")
Power cord:	9' [274 cm] with 90° flat plug with 45° rotation
Power receptacles:	12A, 120 VAC spill-resistant
USB charging ports:	2.1A (10.5W)
Dimensions:	6"W [15.2 cm] x 2.5"D [6.35 cm] x 3.18"H [8.1 cm]
Unit weight:	2.29 lb [1 kg]

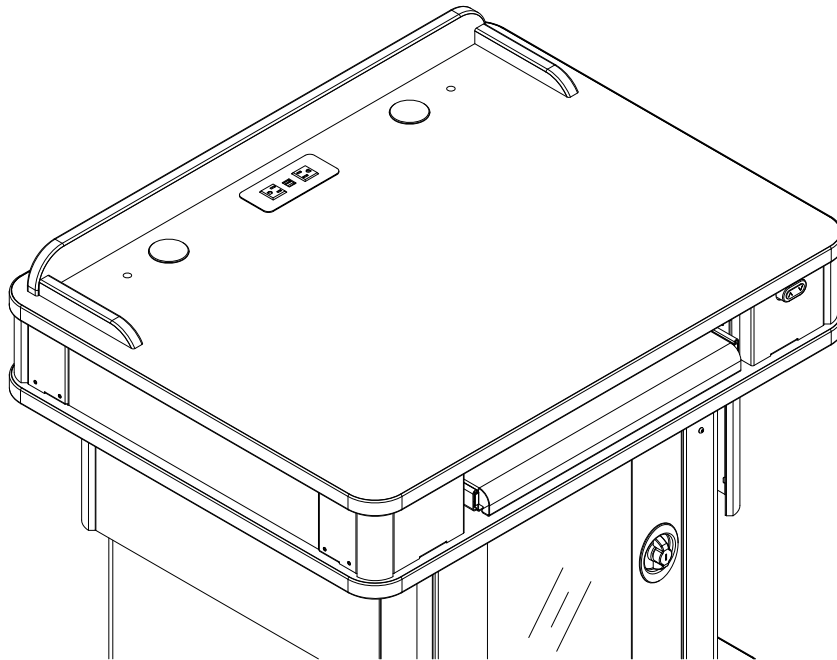

Cove™ Power Module Color

ORDER CODE B =	Black	ORDER CODE 0 =	None
----------------	-------	----------------	------







ORDER CODE S =	Silver
----------------	--------



Additional Cutout Request


ORDER CODE 0 =	None
ORDER CODE 2 =	Yes - in Worksurface
ORDER CODE 3 =	Yes - in OB Panel

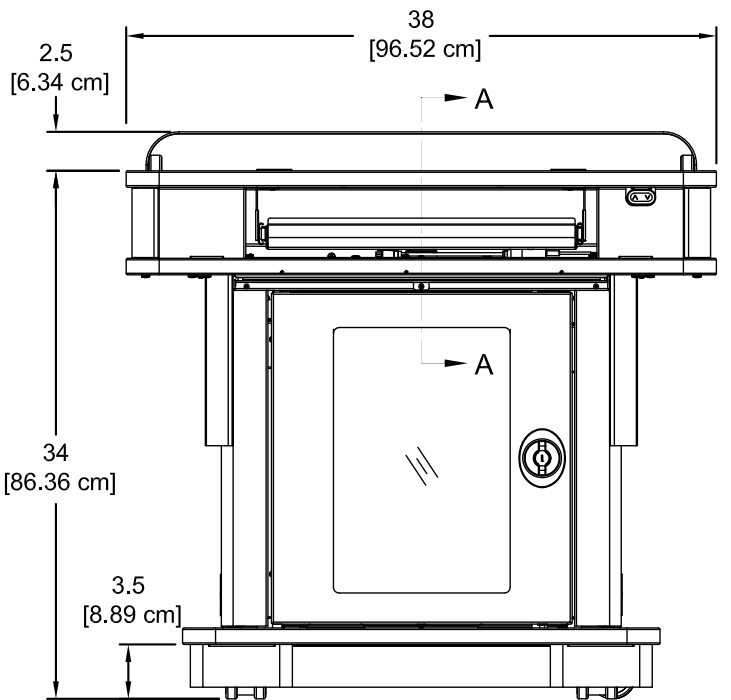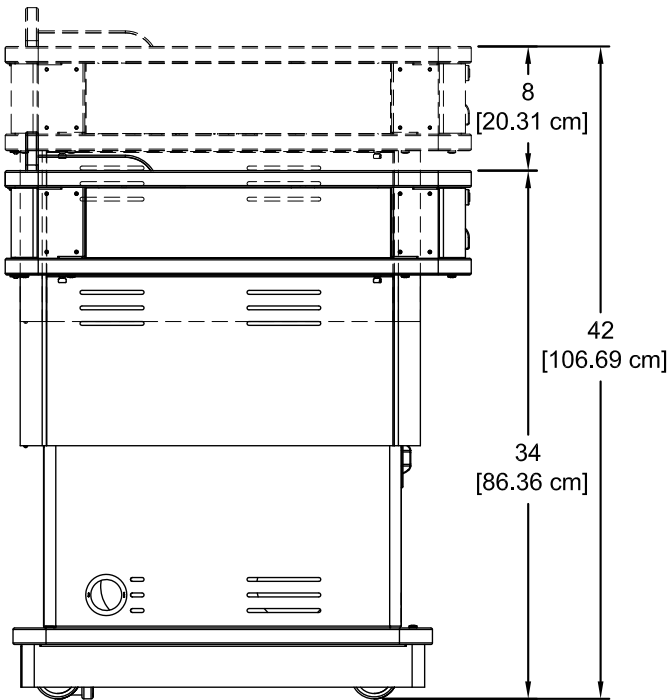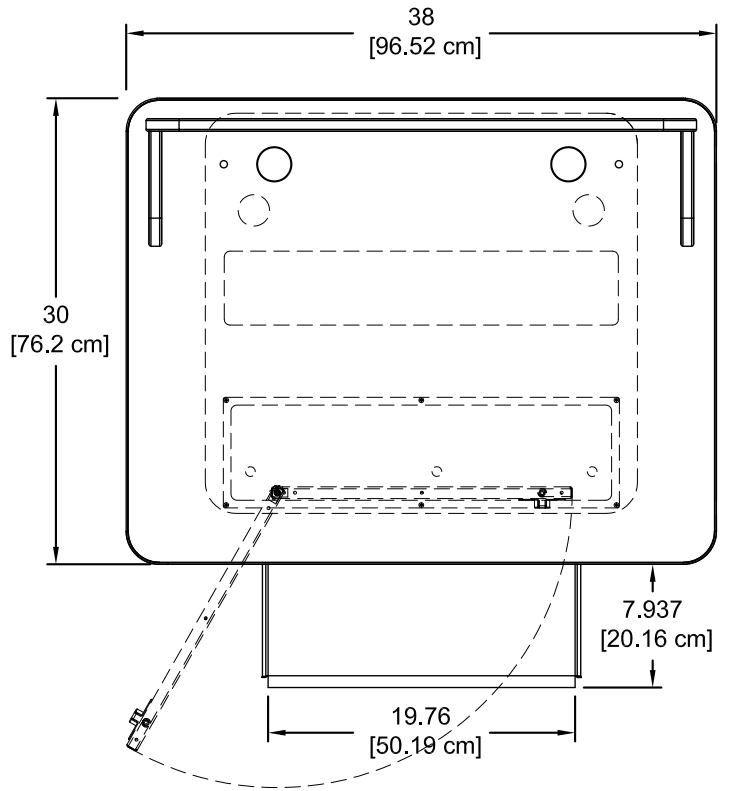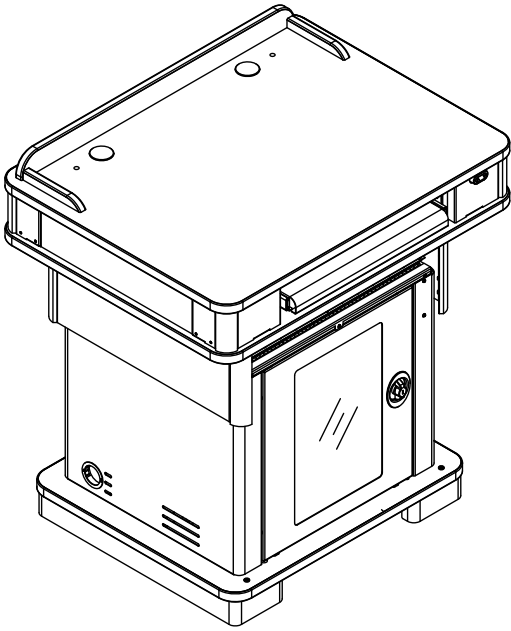




Top View  
Surround worksurface  
Max cutout area


Note: Most control devices will only fit in the over-bridge version of the Honors lectern. Modified worksurface cutouts should be reviewed by Spectrum to ensure clearance of brackets, keyboard tray slides, or other objects under the worksurface.

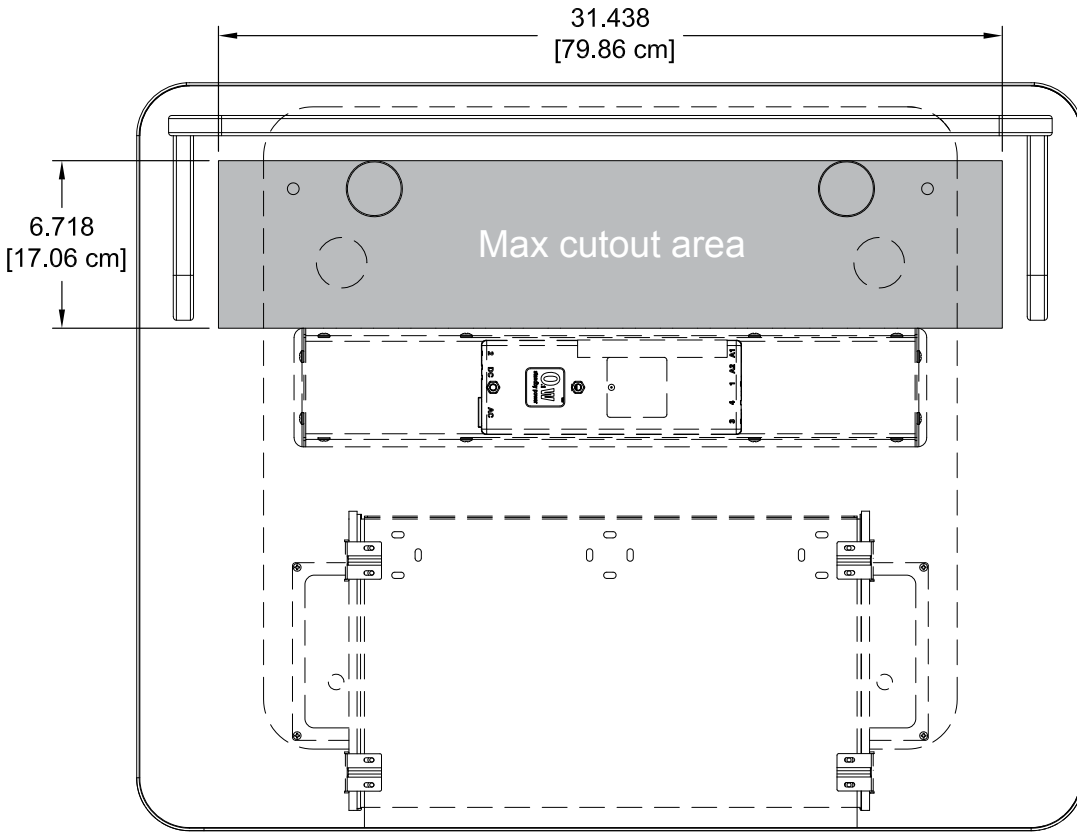




Section View A-A  
Surround worksurface  
Max cutout area

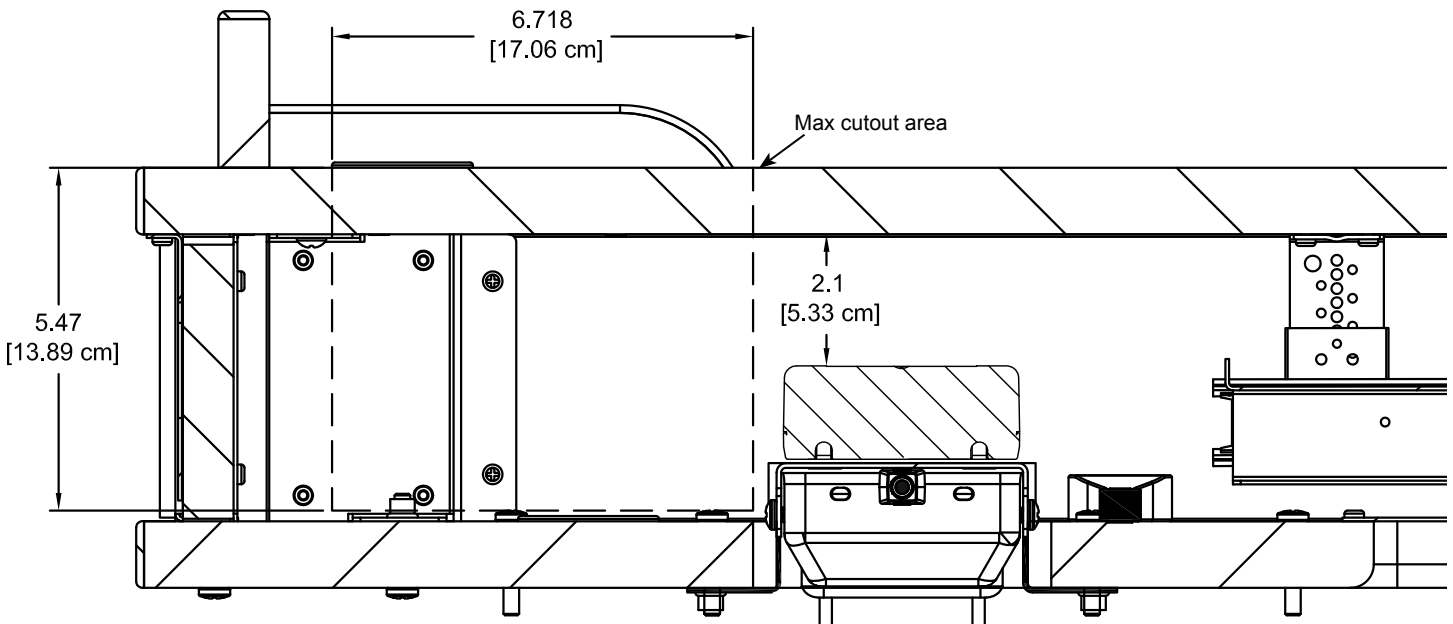


Honors Lectern with overbridge  
(Shown with one optional Flip-Up Shelf)

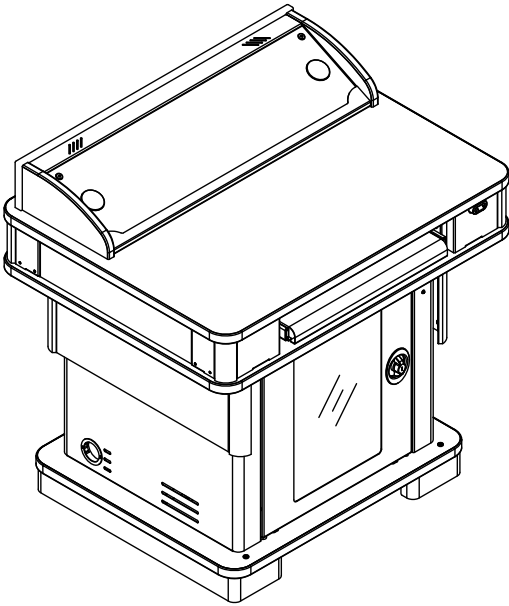

Note: Modified overbridge insert panel cutouts should be reviewed by Spectrum to ensure clearance of brackets, keyboard tray slides, or other objects under the worksurface.

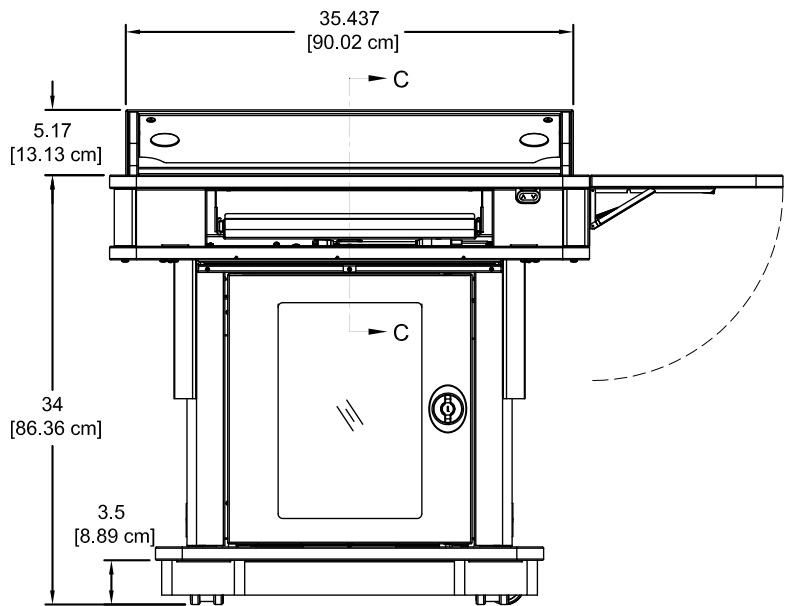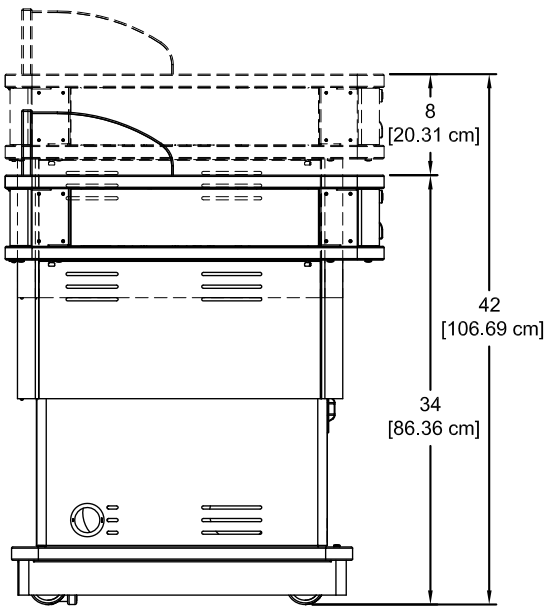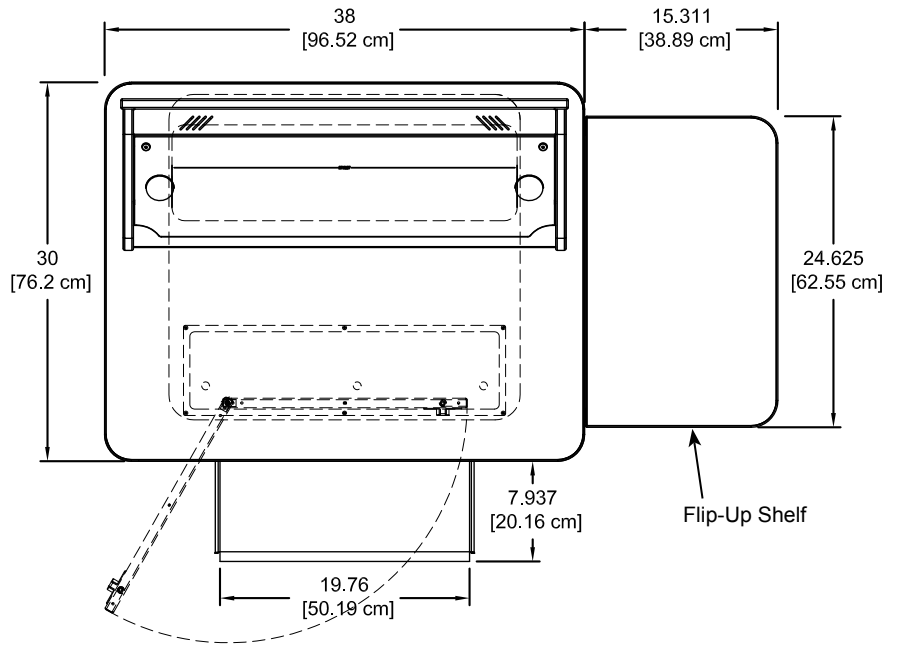

Honors Lectern overbridge insert panel blank  
(flat view)

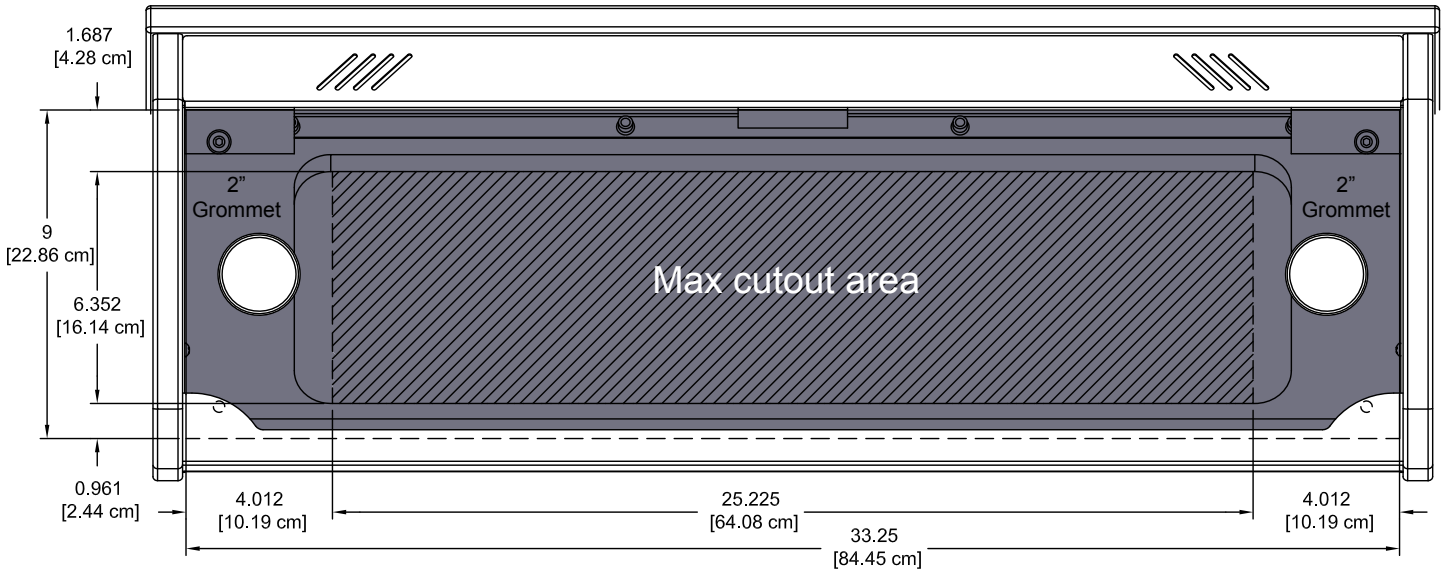


Overbridge  
Section View C-C


Note: The Overbridge Control Console™ has been designed for many of the currently available controllers on the market, however, modified cutouts should be reviewed by Spectrum to ensure clearance of brackets, keyboard slides, or other objects under the worksurface.

**Contact Spectrum to specify cutout size(s) and location(s).**


Cutouts can be made in the blank insert panel by the customer after the lectern has been purchased, but are only recommended within the cutout area shown.

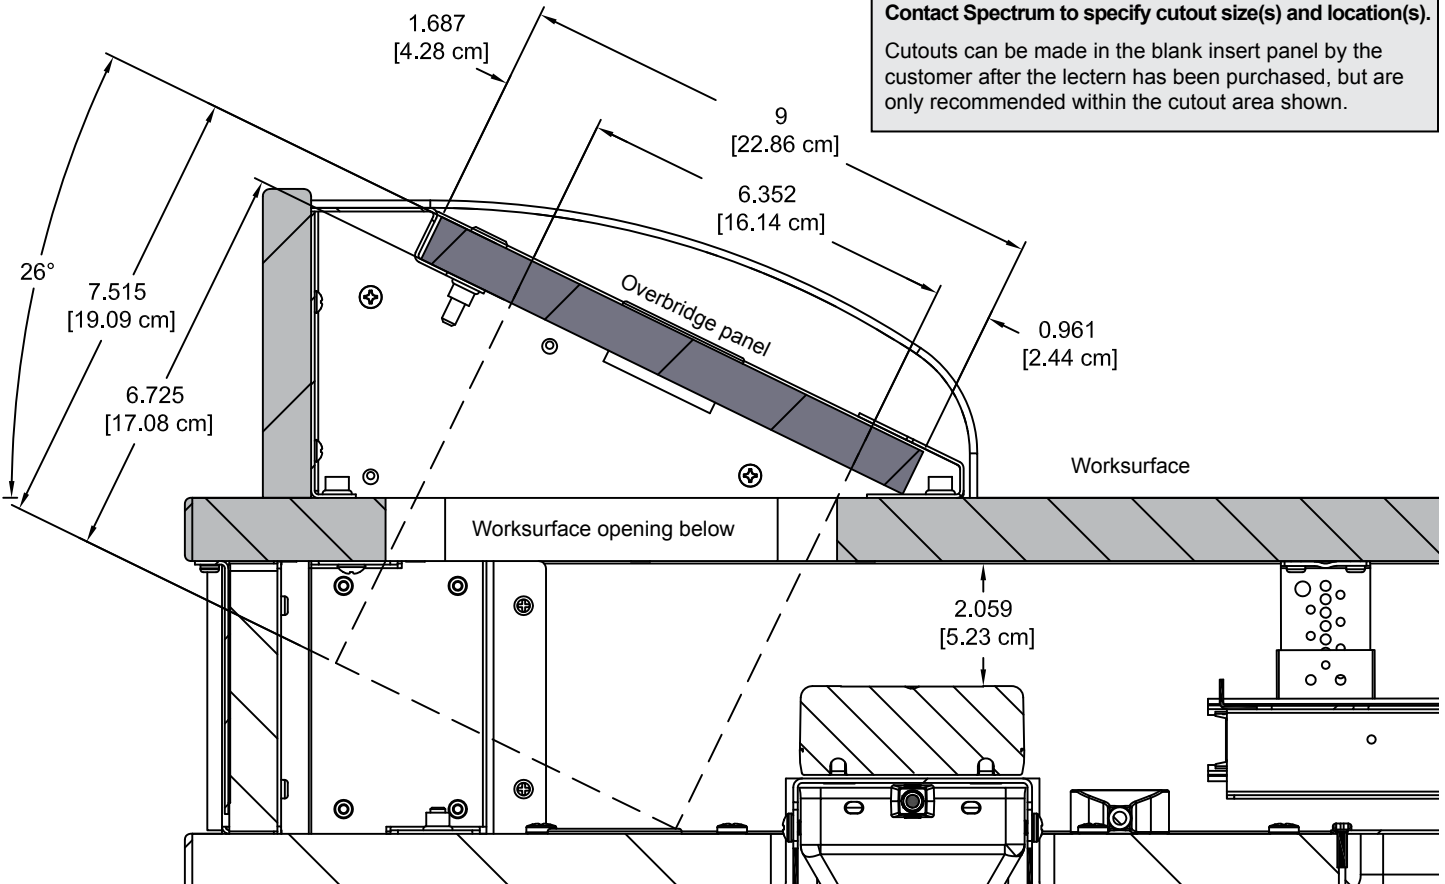



Optional 12RU Rack Cube

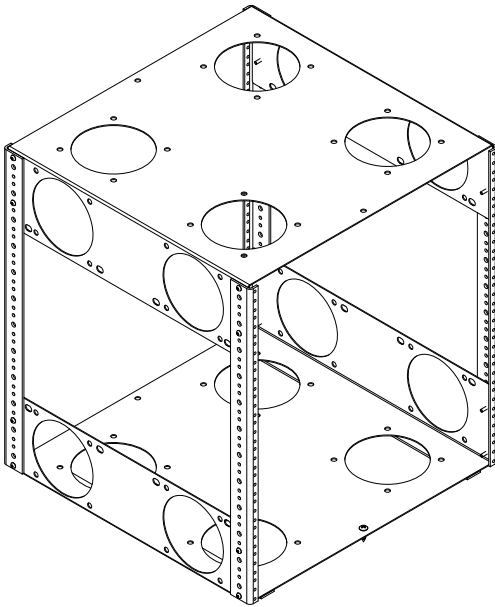

(Maximum component depth available)

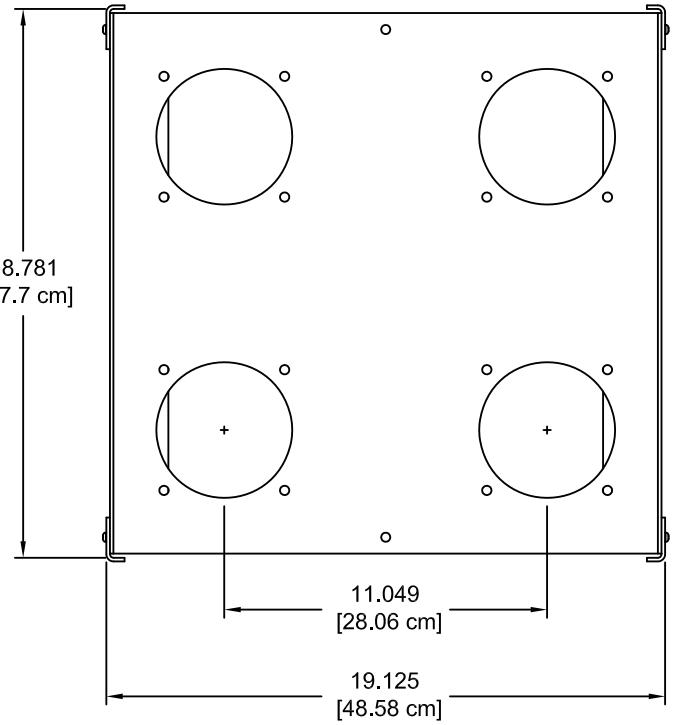


(Overall depth)

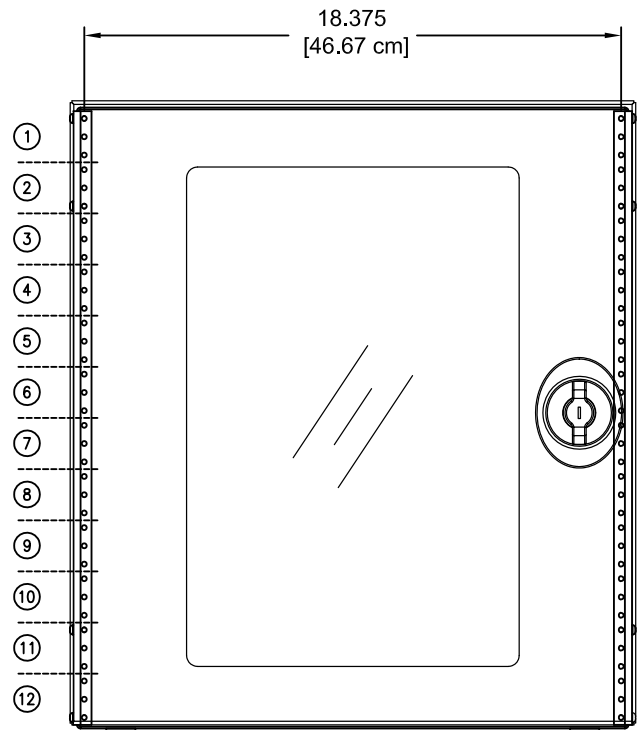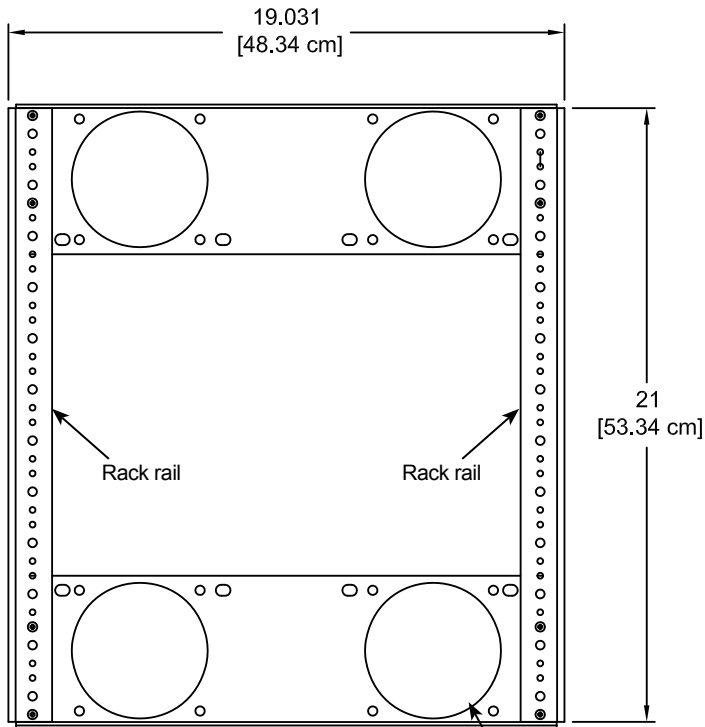

Shown behind Instructor-side door

Note: Check the dimensions of all equipment before installation.


# Accessories (Available separately *after* initial configured purchase.)

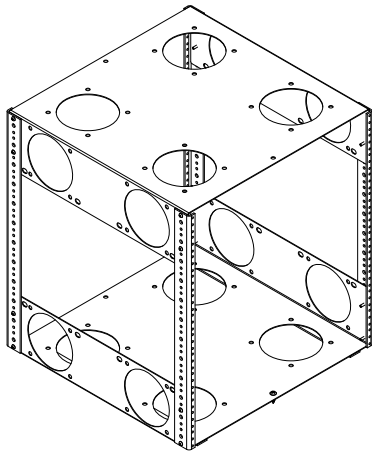

## 12RU Rack Cube - 55197

- One rack cube can be installed into the Honors Lectern
- Polyethylene slides on bottom for easy removal
- Can be secured to base panel
- Cooling fan compatible
- Color: black
- Customer-installed


Rack rail:	12RU front and rear
Dimensions:	19.125"W [48.58 cm] x 19.031"D [48.34 cm] x 21.25"H [53.97 cm]
Mounts for cooling fans:	Compatible with most 4.7" fans with 4.13" mounting hole spacing (12 mounting locations available)
Unit weight:	21 lb [9.5 kg]
Shipping weight:	22 lb [10 kg]

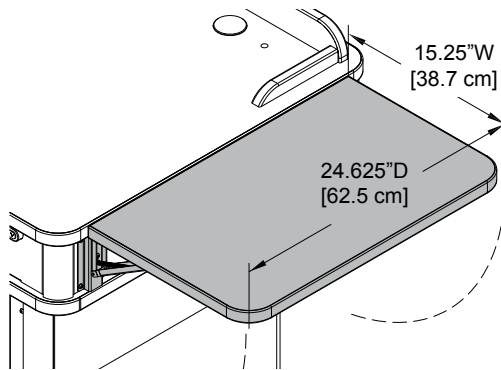

## Flip-Up Shelf - 55147


- Shelf hinges lock into place in the upright position
- Level with worksurface
- Customer-installed

Weight capacity:	35 lb [15.9 kg]
Dimensions:	15.25"W [38.7 cm] x 24.625"D [62.5 cm] x 1"H [2.54 cm]
Unit weight:	18 lb [8.2 kg]
Shipping weight:	23 lb [10.4 kg]

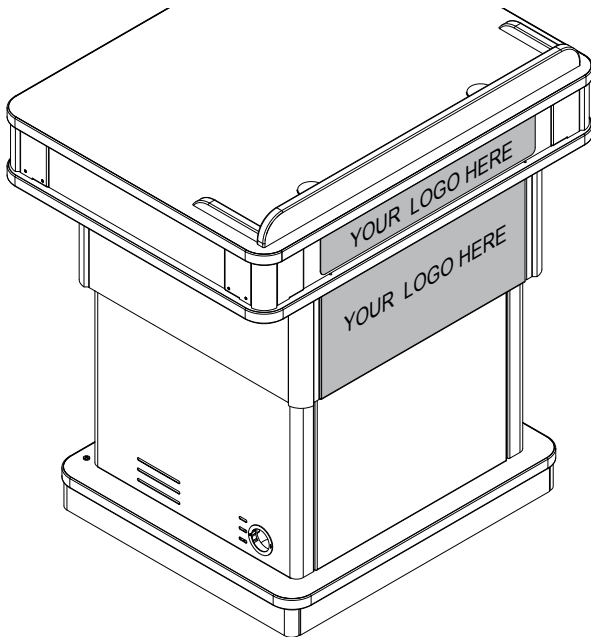


## Customized Upper Logo Panel - 55148


- Attaches to audience-side of lectern
- 21.58"W [54.81 cm] x 2.89"H [7.33 cm]
- To get panel customized-contact Spectrum for details
- New logos require a first time logo charge
- Customer-installed
- Shipping weight: 10 lb [4.5 kg]

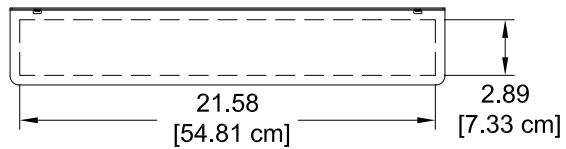

## Customized Lower Logo Panel - 55149

- Attaches to audience-side of lectern
- 20.41"W [51.84 cm] x 9.18"H [23.33 cm]
- To get panel customized-contact Spectrum for details
- New logos require a first time logo charge
- Customer-installed
- Shipping weight: 10 lb [4.5 kg]

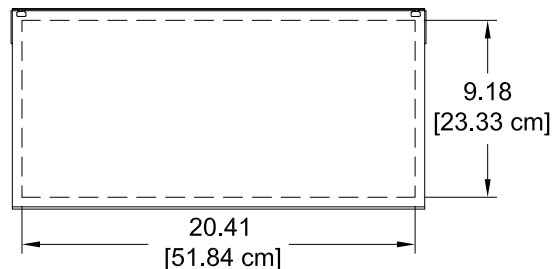


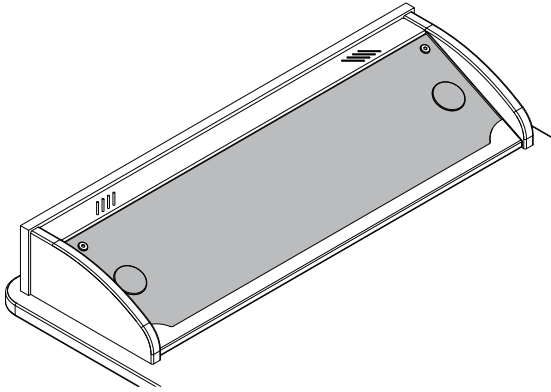

**Overbridge Insert Panel Blank - 96507**  
**Overbridge Insert Panel with cutouts - 96507mod**

- For overbridge version only
- Contact Spectrum to specify cutout size(s) and location(s)
- Overbridge not available separately
- Includes two 2" grommets with covers
- Customer-installed
- Shipping weight: 8.5 lb [3.9 kg]

The 96507 Insert Panel is available to customers needing a replacement panel or different cutouts for technology upgrades.



**Cove™ Power Module - 99044**

- Two power receptacles
- Two USB charge ports (not data-compatible)
- Thumbscrew clamps
- Requires worksurface cutout
- ETL listed
- Available in Black or Silver
- Customer-installed

Cutout required:	5.25"W [13.3 cm] x 2"D [5.1 cm] (mounts to surface thicknesses up to 1.5")
Power cord:	9' [274 cm] with 90° flat plug with 45° rotation
Power receptacles:	12A, 120 VAC spill-resistant
USB charging ports:	2.1A (10.5W)
Dimensions:	6"W [15.2 cm] x 2.5"D [6.35 cm] x 3.18"H [8.1 cm]
Unit weight:	2 lb [.9 kg]
Shipping weight:	2.29 lb [1 kg]

**Note:** This "Power Module" is the only ETL certified power supply option for this product.

# Warranty

## **WE WILL MAKE IT RIGHT FOR YOU!**

Spectrum is committed to provide complete customer satisfaction. Each of our products is manufactured from the best materials available and each product is stringently monitored throughout the production process through our P.A.C.E. program (Product Assurance to meet Customer Expectations).

We expressly warrant that Spectrum products will be of good quality and workmanship and free from defect for the period set out in the warranty table below from the date of delivery. This warranty shall not apply to defects or damage resulting from misuse, abuse, neglect, improper care, modification or repair not authorized by Spectrum, or any other cause outside the control of Spectrum. Spectrum will, at its sole option, either repair or replace the defective product.

This warranty is exclusive; no other warranty, written or oral, is expressed or implied. This warranty is given by Spectrum to Buyer and to no other person or legal entity. No Spectrum dealer, distributor, agent or employee is authorized to make any modification or addition to this warranty.

**NOTWITHSTANDING ANYTHING TO THE CONTRARY, SPECTRUM WILL NOT UNDER ANY CIRCUMSTANCES BE LIABLE FOR INDIRECT OR LIQUIDATED DAMAGES, INCLUDING CONSEQUENTIAL, INCIDENTAL AND SPECIAL DAMAGES. IN NO EVENT SHALL SPECTRUM'S LIABILITY, WHETHER UNDER CONTRACT OR WARRANTY, IN TORT OR OTHERWISE, EXCEED THE PURCHASE PRICE RECEIVED BY SPECTRUM FOR THE PRODUCT AT ISSUE AND "RECALL ACTION" EXPENSES. SPECTRUM SHALL NOT BE SUBJECT TO ANY OTHER OBLIGATIONS OR LIABILITIES, WHETHER ARISING OUT OF BREACH OF CONTRACT, WARRANTY, TORT (INCLUDING NEGLIGENCE AND STRICT LIABILITY) OR OTHER THEORIES OF LAW, WITH RESPECT TO PRODUCTS SOLD OR SERVICES RENDERED BY SPECTRUM, OR ANY UNDERTAKINGS, ACTS OR OMISSIONS RELATING THERETO.**

Our Customer Service Department is ready to provide immediate attention to any questions, comments or concerns. They are available to answer your calls Monday through Friday from 7 am to 5 pm CST. In addition your product comments or concerns are welcome via e-mail at: [spectrum@spectrumfurniture.com](mailto:spectrum@spectrumfurniture.com).

**Warranty Table**

<b>Item</b>	<b>Warranty Period</b> effective 1/1/2015
Adjustable Crank / Electric Desk Legs	• 1 Year
Flat Panel Desk Gas Cylinders	
Chairs <ul style="list-style-type: none"> <li>• Adjustable Height Chair Parts – including frames, gas cylinders, wood and plastic parts, control handles, casters</li> <li>• Adjustable Height Chair Upholstery</li> <li>• In-Stock Upholstery</li> <li>• Graded-In Fabrics and Customer Owned Material</li> </ul>	<ul style="list-style-type: none"> <li>• 7 Years</li> <li>• 2 Years</li> <li>• 2 Years</li> <li>• No Warranty</li> </ul>
Height Adjustable Columns and Lifts	• 1 Year
General Use Casters	
Electrical (including timers and LINAK actuators)	• 2 Years
Keyboard / Mouse Trays	• 1 Year
Flat Panel Monitor Arms <ul style="list-style-type: none"> <li>• Flat Panel Monitor Arm – General Parts</li> <li>• Flat Panel Monitor Arm – Gas Cylinders</li> </ul>	<ul style="list-style-type: none"> <li>• 5 Years</li> <li>• 2 Years</li> </ul>
Desks and Lecterns <ul style="list-style-type: none"> <li>• Computer Desk Chassis</li> <li>• Cart Chassis</li> <li>• Lectern Chassis</li> </ul>	• 10 Years

