




752MFRMHW
3/8 Drive, 5-75 Ft. Lb. Micro-Adjustable Torque Wrench







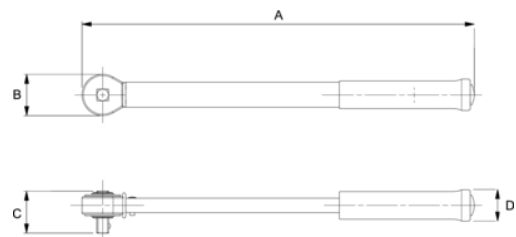


PRODUCT DETAILS

- Dual scale, calibrated clockwise only
- Positive lock with spring loaded pull down lock ring
- Fast, accurate and easy to set
- Easy-to-read laser marked scales
- 1/4", 3/8", 1/2" drive feature quick release buttons which provide good socket retention as well as easy socket retention
- Accuracy: $\pm 3\%$ CW of indicated value, CW from 20% to 100% of full scale
- Meets or exceeds ASME standards, ISO 6789 standards
- Individually serialized with matching certificate of calibration traceable to N.I.S.T



PRODUCT ATTRIBUTES

Product: **752MFRMHW**

	0.5 ozf.in		0.7 lbf.in		
 lbf-ft	5-75 lbf-ft	 N·m	10.2-98.3 N·m	 lb	2.5 lb
	3/8 in	A	15.4 in	B	1.145 in
C	0.714 in	D	1.4 in	