

Phase and Motor Rotation Tester Models 6608 & 6609

NEW!




Features

- Indication of live phase presence or phase absence
- Determination of a motor's rotation direction with or without contact (Model 6609)
- Automatic testing as soon as the instrument is connected
- Terminals and cables identified by color-coding to simplify connection
- Phase rotation indicators (Model 6608)
- Phase and motor rotation indicators (Model 6609)
- Color-coded leads (red, black, blue) and alligator clips (black)
- Simple operation
- Line supplied - no battery
- 600V CAT III rated and CE Mark

SPECIFICATIONS

MODELS	6608	6609
ELECTRICAL		
Operating voltage	40 to 850Vac between phases	With leads connected: 40 to 600Vac between phases Without leads connected: 120 to 400Vac between phases
Frequency range	15 to 400Hz	
Power supply	Self-powered via the measurement inputs	9V battery Alkaline (included)
Electrical safety	600V CAT III	
MECHANICAL		
Dimensions	5.1 x 2.7 x 1.3" (130 x 69 x 32mm)	
Weight	4.5 oz (130g)	6 oz (170g)
ENVIRONMENTAL		
Operating Temperature	32° to 104°F (0° to 40°C)	
Storage Temperature	-4° to 122°F (-20° to 50°C); RH < 80%	
SAFETY		
Safety Ratings	IEC 61010-1, DIN VDE 0411; IEC 61557-7, DIN VDE 0413-7; Tightness: IP 40 (as per IEC 60529 Ed.92)	

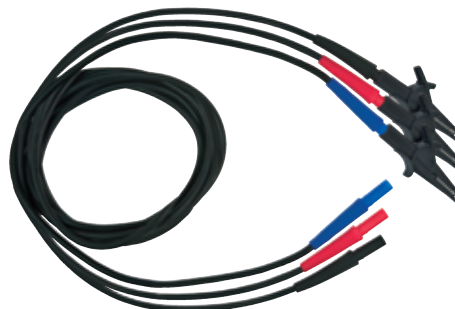

Each model includes a carrying case,
3 test leads, 3 alligator clips and
a user manual


CATALOG NO.	DESCRIPTION	PRICE	NIST CALIBRATION
2121.10	Phase Rotation Meter Model 6608	\$69.00	-
2121.11	Phase & Motor Rotation Meter Model 6609	\$99.00	-

Outlet Tester Model OT-2

- Detects faulty wiring in three-wire receptacles
- Detects open grounds and neutrals
- Detects reversed hot/ground connections
- Simply plug in and watch red and amber indicators
- For use on 100 to 125VAC

Application

- Test GFCI for proper operation
- 120V - three-wire US



AC Line Splitter Model ALS-1

For use with Clamp-On Meters & Multimeters using Current Probes

- Avoids splitting lines - makes reading current easy
- Increases sensitivity of clamp-on current probes and clamp-on meters ten times in X10 mode
- Direct reading X1 mode
- Voltmeter input jacks
- Integral ground conductor
- Facilitates reading current draw of device plugged into it
- Facilitates reading current draw through extension cords
- 120V, 15A capacity



Voltage Tester Model NC-1



SPECIFICATIONS

MODEL	NC-1
Voltage Sensitivity	100 to 240VAC
Frequency	50/60Hz
Detection Distance	<5mm
Over Voltage	600V CAT III
Battery	2 x 1.5V AAA Alkaline (included)
Safety	For indoor use and in accordance with over voltage 600V CAT III, Pollution Degree 2

CATALOG NO.	DESCRIPTION	PRICE	NIST CALIBRATION
2121.03	Outlet/GFCI Tester Model OT-2 (110V US)	\$ 7.95	-
2121.05	AC Line Splitter Model ALS-1	\$14.95	-
2121.09	AC Voltage Detector Model NC-1	\$ 9.95	-