

DATA LOGGERS

Simple Logger® II TRMS Voltage

600Vac/dc Model L261 & ±850Vdc Model L481

One channel loggers for voltage measuring, monitoring and troubleshooting

► SPECIFICATIONS

MODELS	L261		L481	
ELECTRICAL				
Channels	One			
Input Connection	Two recessed 4mm safety banana jacks			
Measurement Range	0 to 600VAC/DC		-850 to ±850Vdc	
Resolution	0.1V			
Accuracy (50/60Hz)	0 to 5V: unspecified 5 to 50V: ± (0.5% of Reading + 1V) 50 to 600V: ± (0.5% of Reading + 0.5V)		0 to 5V: unspecified 5 to 50V: ± (0.5% of Reading + 1V) 50 to 850V: ± (0.5% of Reading + 0.5V)	
Input Impedance	40MΩ			
Sample Rate	64 samples/cycle		Maximum of 8 per second	
Storage Rate	Programmable from 8 every second to 1 every day			
Storage Modes	Start/Stop, FIFO, Extended Recording Mode (XRM™) and Alarm			
Recording Length	15 minutes to 8 weeks, programmable using DataView®			
Memory	240,000 measurements (512KB) The recorded data is stored in non-volatile memory and will be retained even if the battery is low or removed.			
Communication	USB 2.0 optically isolated			
Power Source	2 x 1.5V AA-cell Alkaline batteries (included)			
Battery Life	100 hours to >45 days (dependent on sample rate and recording length)			
MECHANICAL				
Dimensions	4.94 x 2.75 x 1.28" (125 x 70 x 32mm)			
Weight (with battery)	6.4 oz (181g)			
Case	UL94-V0			
Vibration	IEC 68-2-6 (1.5mm, 10 to 55Hz)			
Shock	IEC 68-2-27 (30G)			
Drop	IEC 68-2-32 (1m)			

► PRODUCT INCLUDES

Set of two color-coded 5 ft voltage leads, color-coded alligator clips (red/black), USB type A to 5 pin Mini-B, and USB stick supplied with DataView® software and user manual.



► FEATURES

- TRMS voltage recording up to 600Vac/dc (Model L261)
- Bipolar voltage recording up to ±850Vdc (Model L481)
- AC: 64 samples per cycle and DC: 8 samples per sec (Model L261)
- Programmable storage rates from 8 every second to 1 every day
- 4 user selectable storage modes
- Stores up to 240,000 measurements in non-volatile memory
- Powered by standard Alkaline batteries
- Lightweight, compact, fits anywhere
- 5 LED indicators quickly and clearly display logger status
- Includes FREE DataView® software for data storage, real-time display, analysis and report generation
- Optically isolated USB 2.0 communication cable included
- EN 61010-1; 300V CAT IV; 600V CAT III

► APPLICATIONS (MODEL L261)

- Surge and Sag recording
- Long term supply monitoring
- Industrial, commercial and residential monitoring
- Monitor voltage harmonics
- Find intermittent voltage problems
- Machine monitoring

► APPLICATIONS (MODEL L481)

- Rail voltage monitoring
- Long term supply monitoring
- Find intermittent voltage problems
- Machine monitoring
- Windmill monitoring

CATALOG NO.	DESCRIPTION
2126.05	Simple Logger® II Model L261 (1-Channel, TRMS, 600Vac/dc, DataView® software)
2126.25	Simple Logger® II Model L481 (1-Channel, ±850Vdc, DataView® software)

DataView®


Data Analysis and Reporting Software for Data Loggers




Typical DataView® Functional Displays



Quick and simple configuration of all functions and settings from one dialog box.

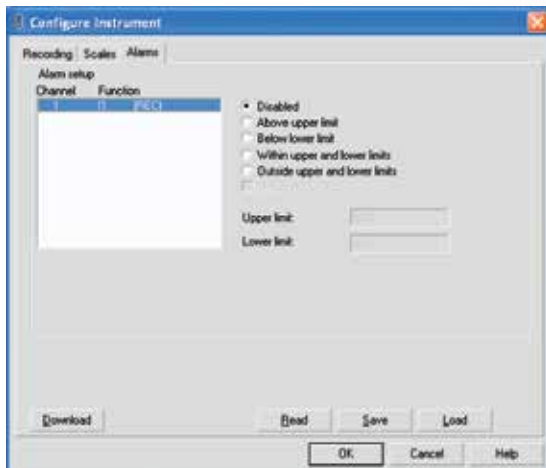



Configure all alarm functions with straightforward selections.

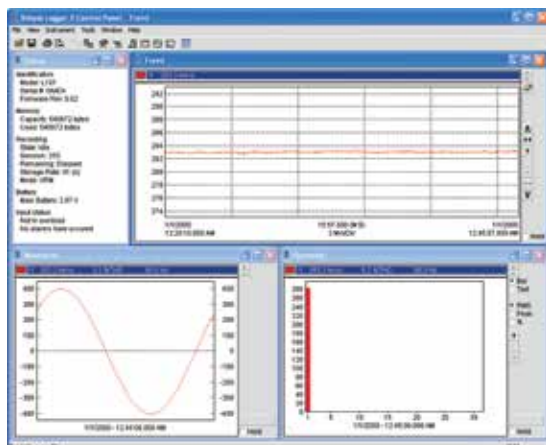

Real-time view of trend, waveform and status screens.

Configure all data logger functions of the Simple Logger® II Models

- Display and analyze real-time data on your PC
- Configure all data logger functions and parameters from your PC including sample rate, recording length, channel configuration and more
- Create and store a complete library of configurations that can be uploaded to the logger as needed
- Zoom in and out and pan through sections of the graph to analyze the data
- Download, display and analyze recorded data
- Display waveforms, trend graphs, harmonics (AC models) and text summaries
- Create custom views and reports
- Print reports using standard or custom templates you design
- Free software upgrades are available on our website www.aemc.com

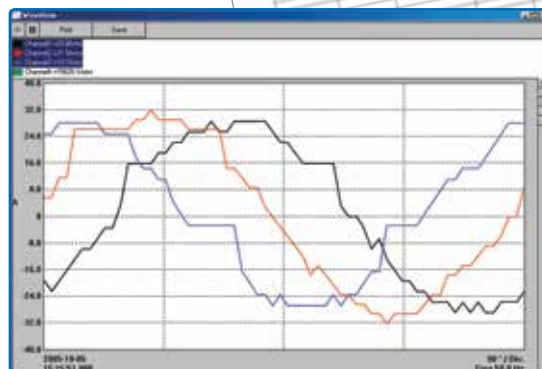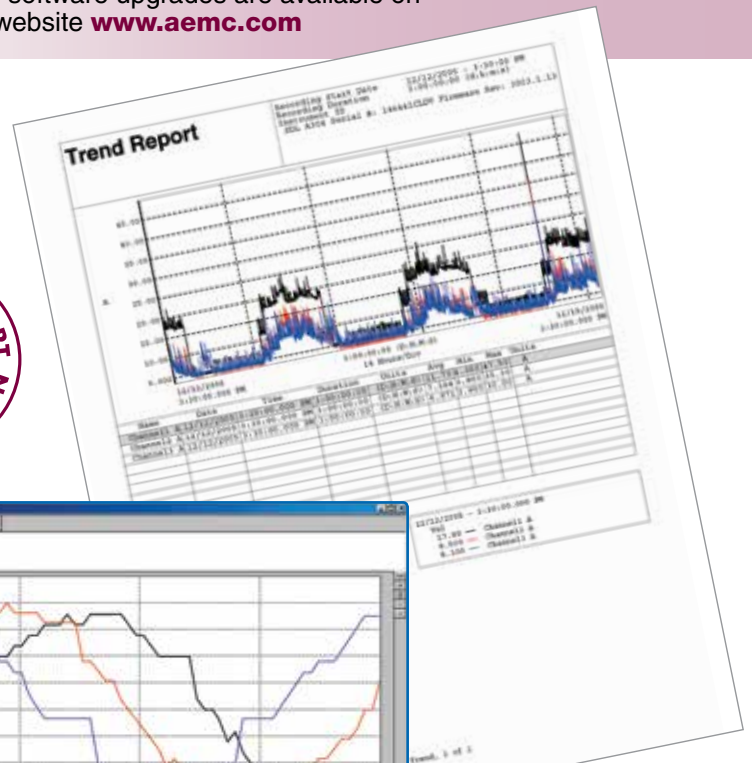

Real-time display of all active inputs on computer through DataView® software.