

# PD-Series LCD Display 42" | 49" | 55"

## The Right Building Blocks for Your Video Wall



Built for digital signage, the PD-Series features a 6.5mm narrow bezel and a full slate of inputs including HDMI with HDCP, DisplayPort 1.2 for 4K 2x2 video wall setups, and RS-232 and RJ45 ports for remote and network-based control. The displays also include other signage-friendly features such as landscape and portrait modes, scheduling capabilities, and a switch-on delay mechanism for use in video walls. Furthermore, the PD-Series also fits for security control room usages with its premium-grade panel and 24/7 design.





### Ideal for Video Walls

The PD-Series is an excellent choice for video walls with a variety of features, which make installation and setup convenient including DisplayPort 1.2 support for easy 4K 2x2 video wall setup, a switch-on delay mechanism, a logo-free design, and a premium-grade panel for 24/7 operation.



### Easy Control for Large-Scale Digital Signage

Its built-in scheduler and OPS slot are complemented by IR / RS-232 looping and Ethernet control capabilities to easily control, setup and maintain large-scale digital signage video walls installations.




### Features

- Full HD 1920 x 1080 resolution
- 700 nits high brightness panel offers clear images in bright ambient light areas
- Anti-Burn-in™ technology prevents image ghosting
- Durable metal housing
- 6.5mm narrow bezel width for professional LCD video walls
- DisplayPort 1.2 Multistream functionality allows for 4K UHD resolution across a 2x2 video wall
- Image Enhancer: 3D Comb Filter / Deinterlace / Noise Reduction
- Versatile connectivity: DisplayPort, HDMI, DVI, VGA, Component/Composite
- Built-in USB media player for simple signage content delivery
- An integrated scheduler allows content programming based on source, time and day


### High Visibility

The PD-Series offers pristine images that maximize visibility, making videos shown on the display stand out in any setting. The 700 nits high brightness, 10 bit color depth, and 5 ms response time ensure life-like visuals, all complemented by a 178-degree viewing angle that allows the display to be seen by all.

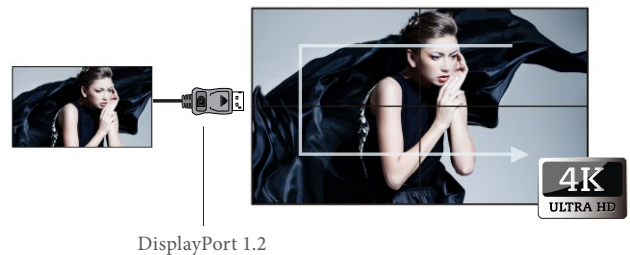

### Simple Content Scheduling

The embedded USB media player allows users to conveniently play content from a USB drive. Simply create scheduled playlists and configure playback settings with the included remote control to display your personalized content.

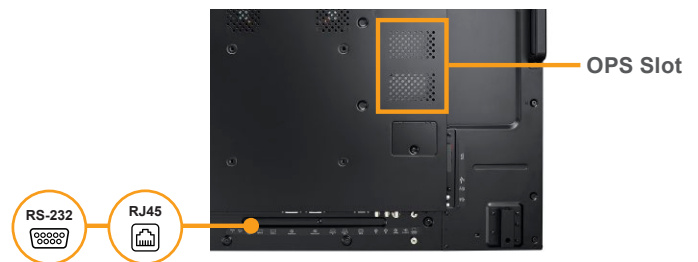

### PID Command & Ctrl Software

PID Command & Ctrl is a software that allows users to control AG Neovo displays via LAN or RS232 connections. It provides a simple and intuitive interface for remote management, OSD-related settings, and easy control on deployed displays. It also can be used to create video walls within minutes and assist system integrators with setting up displays.

- DMR function: play media shared over a local network
- Alink™ function for synchronized powering on/off via HDMI
- RS232/LAN/IR control - provides compatibility with control systems
- Native tiling support for easy video wall setup (up to 5 x 5)
- HeatControl Sensors automatically activate the internal cooling fans when temperature rises
- Selectable gamma curves optimise different kinds of images
- OPS slot ready for easy IPC, media player or HDBaseT receiver integration
- Premium-grade panel for high reliability and long product lifetime
- Rigorous screening of the components for mission-critical 24/7 applications

Specifications	PD-42	PD-49	PD-55
<b>Panel</b>			
Panel Type	LED-Backlit TFT LCD (IPS Technology)	LED-Backlit TFT LCD (IPS Technology)	LED-Backlit TFT LCD (IPS Technology)
Panel Size	41.9"	48.5"	54.6"
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080
Pixel Pitch	0.483 mm	0.559 mm	0.630 mm
Brightness	700 cd/m <sup>2</sup>	700 cd/m <sup>2</sup>	700 cd/m <sup>2</sup>
Contrast Ratio	1300:1	1300:1	1300:1
Viewing Angle (H/V)	178°/178°	178°/178°	178°/178°
Display Colour	1.07B	1.07B	1.07B
Response Time	5 ms	5 ms	5 ms
Surface Treatment	Anti-Glare Treatment (Haze 10%), 3H Hard Coating	Anti-Glare Treatment (Haze 10%), 3H Hard Coating	Anti-Glare Treatment (Haze 10%), 3H Hard Coating
<b>Frequency</b>			
Frequency (H)	31 kHz-92 kHz	31 kHz-92 kHz	31 kHz-92 kHz
Frequency (V)	48 Hz-85 Hz	48 Hz-85 Hz	48 Hz-85 Hz
<b>Signal Input</b>			
DisplayPort	1.2 x 1	1.2 x 1	1.2 x 1
HDMI	1.3b x 2	1.3b x 2	1.3b x 2
DVI	24-Pin DVI-D	24-Pin DVI-D	24-Pin DVI-D
VGA	15-Pin D-Sub x 1	15-Pin D-Sub x 1	15-Pin D-Sub x 1
Component	BNC x 1	BNC x 1	BNC x 1
Composite	BNC x 1	BNC x 1	BNC x 1
<b>Signal Output</b>			
DisplayPort	1.2 x 1	1.2 x 1	1.2 x 1
DVI	29-Pin DVI-I x 1 (VGA/HDMI/OPS)	29-Pin DVI-I x 1 (VGA/HDMI/OPS)	29-Pin DVI-I x 1 (VGA/HDMI/OPS)
<b>External Control</b>			
IR In	3.5 mm Phone Jack	3.5 mm Phone Jack	3.5 mm Phone Jack
IR Out	3.5 mm Phone Jack	3.5 mm Phone Jack	3.5 mm Phone Jack
RS232 In	2.5 mm Phone Jack	2.5 mm Phone Jack	2.5 mm Phone Jack
RS232 Out	2.5 mm Phone Jack	2.5 mm Phone Jack	2.5 mm Phone Jack
LAN	RJ45 x 1	RJ45 x 1	RJ45 x 1
RJ11	Yes	Yes	Yes
<b>Other Connectivity</b>			
USB	2.0 x 1 (Service Port / Media Playback)	2.0 x 1 (Service Port / Media Playback)	2.0 x 1 (Service Port / Media Playback)
OPS Slot	Yes	Yes	Yes
<b>Audio</b>			
Audio In	Stereo Audio Jack (3.5 mm), Stereo Audio Jack (RCA)	Stereo Audio Jack (3.5 mm), Stereo Audio Jack (RCA)	Stereo Audio Jack (3.5 mm), Stereo Audio Jack (RCA)
Audio Out	Stereo Audio Jack (3.5 mm)	Stereo Audio Jack (3.5 mm)	Stereo Audio Jack (3.5 mm)
Internal Speakers	10W x 2	10W x 2	10W x 2
Speaker Output (RMS)	10W x 2	10W x 2	10W x 2
<b>Power</b>			
Power Supply	Internal	Internal	Internal
Power Requirements	AC 100-240V, 50/60 Hz	AC 100-240V, 50/60 Hz	AC 100-240V, 50/60 Hz
On Mode	118W (On)	131W (On)	157W (On)
Standby Mode	< 0.5W	< 0.5W	< 0.5W
Off Mode	< 0.3W	< 0.3W	< 0.3W
<b>Operating Conditions</b>			
Temperature	0°C-40°C (32°F-104°F)	0°C-40°C (32°F-104°F)	0°C-40°C (32°F-104°F)
Humidity	20%-80% (non-condensing)	20%-80% (non-condensing)	20%-80% (non-condensing)
<b>Storage Conditions</b>			
Temperature	-20°C-60°C (-4°F-140°F)	-20°C-60°C (-4°F-140°F)	-20°C-60°C (-4°F-140°F)
Humidity	5%-90% (non-condensing)	5%-90% (non-condensing)	5%-90% (non-condensing)
<b>Mounting</b>			
VESA FPM/PMI	Yes (200 x 200 mm)	Yes (400 x 400 mm)	Yes (400 x 400 mm)
<b>Security</b>			
Kensington Security Slot	Yes	Yes	Yes
<b>Dimensions</b>			
Product w/o Base (W x H x D)	946.9 x 541.0 x 71.1 mm (37.3" x 21.3" x 2.8")	1092.8 x 623.0 x 71.1 mm (43.0" x 24.5" x 2.8")	1228.6 x 699.4 x 71.1 mm (48.4" x 27.5" x 2.8")
Packaging (W x H x D)	1123.0 x 743.0 x 203.0 mm (44.2" x 29.3" x 8.0")	1308.0 x 846.0 x 203.0 mm (51.5" x 33.3" x 8.0")	1444.0 x 922.0 x 223.0 mm (56.9" x 36.3" x 8.8")
<b>Weight</b>			
Product w/o Base	15.3 kg (33.7 lb)	19.0 kg (41.9 lb)	24.7 kg (54.5 lb)
Packaging	19.6 kg (43.2 lb)	25.0 kg (55.1 lb)	31.2 kg (68.8 lb)
<b>Regulation Approval</b>			
Certifications & Compliance	FCC, CE, CB, BSMI, REACH, WEEE, RoHS, EAC	CE, CB, BSMI, REACH, WEEE, RoHS, EAC	CE, CB, FCC, REACH, WEEE, RoHS, EAC
<b>Accessories</b>			
Supplied	Power Cord, VGA Cable, RS232 Cable, Remote Control, Batteries, RS232 Daisy Chain Cable, Quick Start Guide	Power Cord, VGA Cable, RS232 Cable, Remote Control, Batteries, RS232 Daisy Chain Cable, Quick Start Guide	Power Cord, VGA Cable, RS232 Cable, Remote Control, Batteries, RS232 Daisy Chain Cable, Quick Start Guide
<b>Optional Accessories</b>			
Floor Mount	FMS-01, FMS-02, FMC-02	FMS-01, FMS-02, FMC-02	FMS-01, FMS-02, FMC-02
Floor Mount (Landscape only)	-	-	FMC-03+LMK-04, FMC-04+LMK-04
Ceiling Mount	CMP-01+LMK-02, CMP-01+WMK-03	-	-
Ceiling Mount (Landscape only)	CMP-01+LMK-01	CMP-01+LMK-01	CMP-01+LMK-01
Video Wall Mount	VWM-01, VWM-02	VWM-01, VWM-02	VWM-01, VWM-02
Wall Mount	LMA-01, WMA-01, LMK-02, WMK-03	LMA-01	LMA-01, LMA-02
Wall Mount (Landscape only)	LMK-01, LMK-03, LMA-02	LMK-01, LMK-03, LMA-02	LMK-01, LMK-03
Desk Mount (Landscape only)	DTS-01	DTS-01	DTS-01
Stand	STD-04	STD-04	STD-04

All specifications are subject to change without prior notice.

Copyright © 2021 AG Neovo. All rights reserved. The name AG Neovo is a trademark of AIC. All other trademarks are the property of their respective owners.

P/C: PD4200/PD4900/PD5500 Version 1.11, 20210810



Google Play is a trademark of Google, Inc.

**Global Headquarters**

Taipei, Taiwan

**EMEA Regional Headquarters**

Capelle a/d IJssel, The Netherlands

**North & South America Regional Headquarters**

San Jose, CA, U.S.A.

**Asia-Pacific Regional Headquarters**

Taipei, Taiwan

**Canada Sales Office**

Vancouver, B.C., Canada

**China Sales Office**

Shanghai, China

**Czech Republic Sales Office**

Brno, Czech Republic

**Denmark Sales Office**

Støvring, Denmark

**Germany Sales Office**

Mechernich, Germany

**Italy Sales Office**

Livorno, Italy

**Poland Sales Office**

Warsaw, Poland

**Spain Sales Office**

Barcelona, Spain

**Ukraine Sales Office**

Lviv, Ukraine

[www.agneovo.com](http://www.agneovo.com)