


AMP1S52 - Single Source, 5.25", Amplified Drop Ceiling - Two Speaker Package

Single Source, 5.25", Amplified Drop Ceiling Two Speaker combination package consisting of the following:

- 1.) One (1) each AMPIC5 -5.25" amplified speaker with (PS12VAC4A) 12 volts power supply
- 2.) One (1) each IC5 - 5.25" non amplified speaker
- 3.) Two (2) each Backcan enclosures
- 4.) Two (2) each 5TB tile bridges

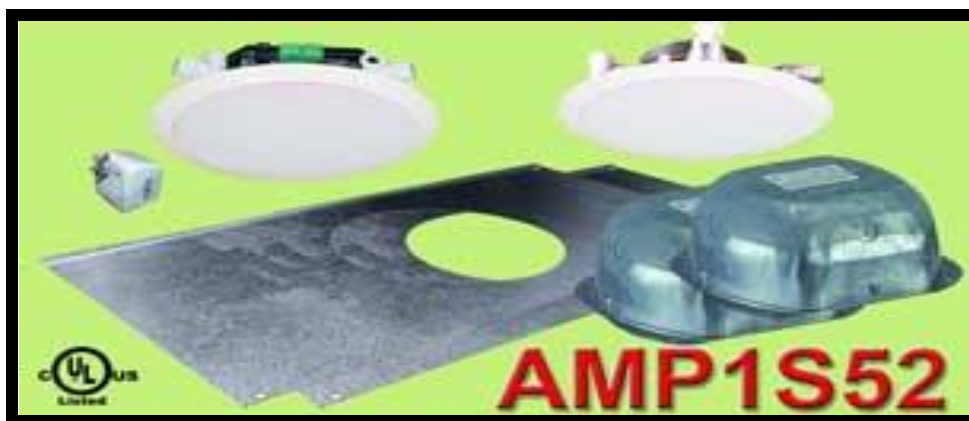

Features:

- Amplifier built onto the OWI IC5 In-Ceiling Speaker
- UL Listed
- 1 Line Level Input/Source
- Up to 25 Watts of Class AB Power - Right at the speaker
- Lower Noise Feature
- Fast and easy - install in the field
- 12 Volt AC power supply (UL rated) included
- Protected from shorts and overheating
- Available also in 1 and 4 speaker package
- Stereo/mono volume control available

Available also in other complete install packages:

- [AMP1S51](#) - Single speaker combination with tile bridge, backcan
- [AMP1S51SVC](#) - Single speaker combination with tile bridge, backcan and volume control
- [AMP1S52SVC](#) - Two speaker combination with tile bridges, backcans and volume control
- [AMP1S54](#) - Four speaker combination with tile bridges, backcans
- [AMP1S54SVC](#) - Four speaker combination with tile bridges, backcans and volume control