


AMPLIFIED SURFACE MOUNT SPEAKER COMBINATION

Model AMP602-2W & AMP602-2B

WIRING INSTRUCTIONS

□ SPECIFICATIONS

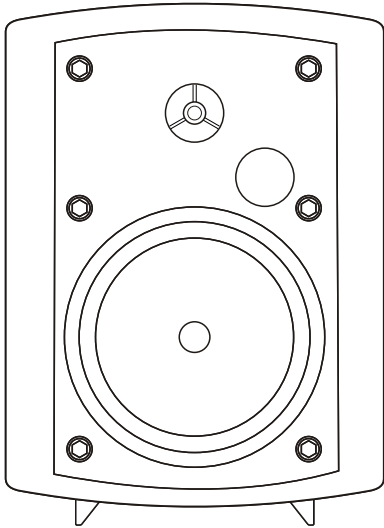


AMP602W 2-Way Plastic Vented BOX Design
AMP602B With Built-in AMPLIFIER

- 6-1/2" Mica Cone Rubber Edge Woofer
- 0.79" (20mm) PEI Dome Tweeter
- Rms Output Power: 2x15Watts
- Frequency Responce: 80Hz-20kHz



205 Westwood Ave, Long Branch, NJ 07740
 Phone: 866-94 BOARDS (26273) / (732)-222-1511
 Fax: (732)-222-7088 | E-mail: sales@touchboards.com

□ WIRING INSTRUCTION

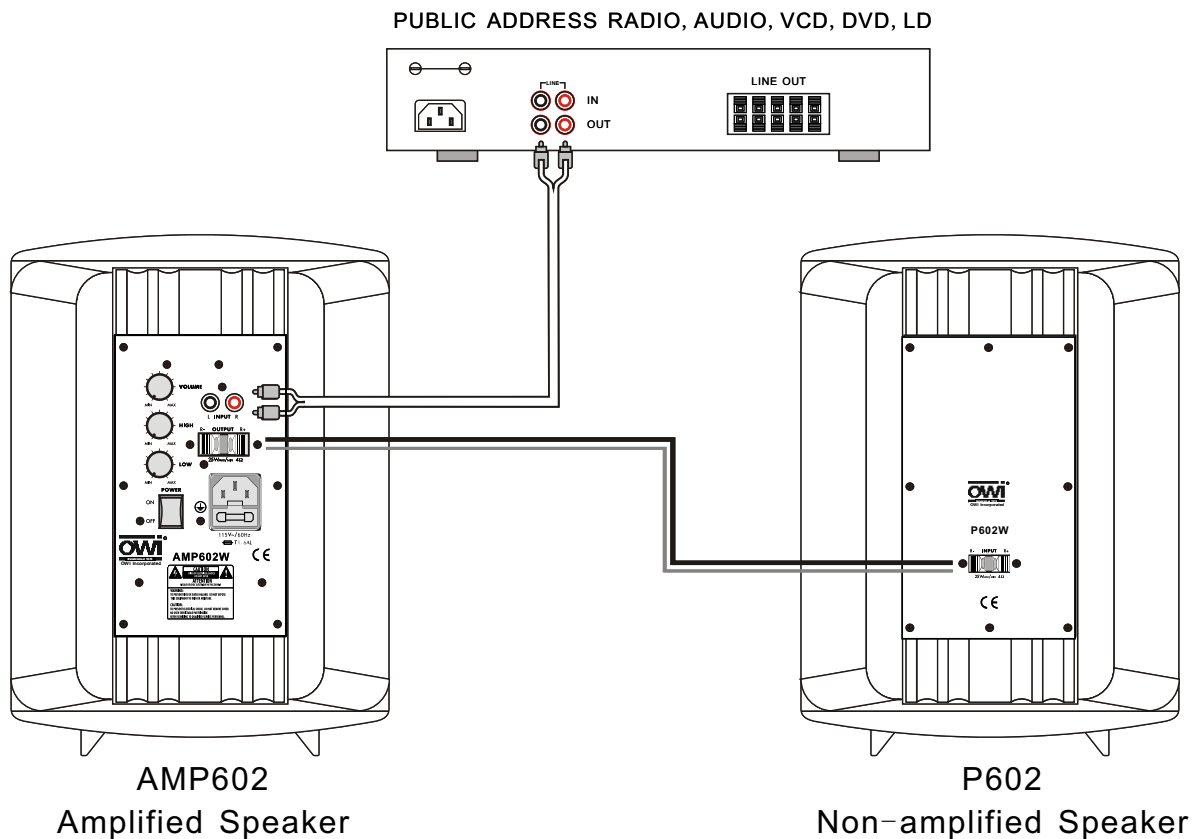


(Please see mounting instructions on the reverse side)



INSTALLATION INSTRUCTIONS AMP602-2W & AMP602-2B

- 1) When mounting speakers, use the mounting bracket as a template for marking and drilling three holes.
- 2) Assemble mounting screws, spring washers, flat washers and nuts to attach mounting brackets to mounting surface. Note that:- Screws, washers and nuts provided are for mounting the cabinet from both sides of the mounting location. For any other type of mounting, please consult your local hardware store for appropriate mounting screws.
- 3) Follow installation directions included with your amplifier (or receiver). Strip 1/2" (12mm) of insulation from each of the two conductors of the wire to expose the bare metal and twist each into a single strand. [Connect the speaker wire to the terminals using the (+) as RED and the (-) as the BLACK].
- 4) Adjust position of the speaker to obtain the desired sound dispersion.

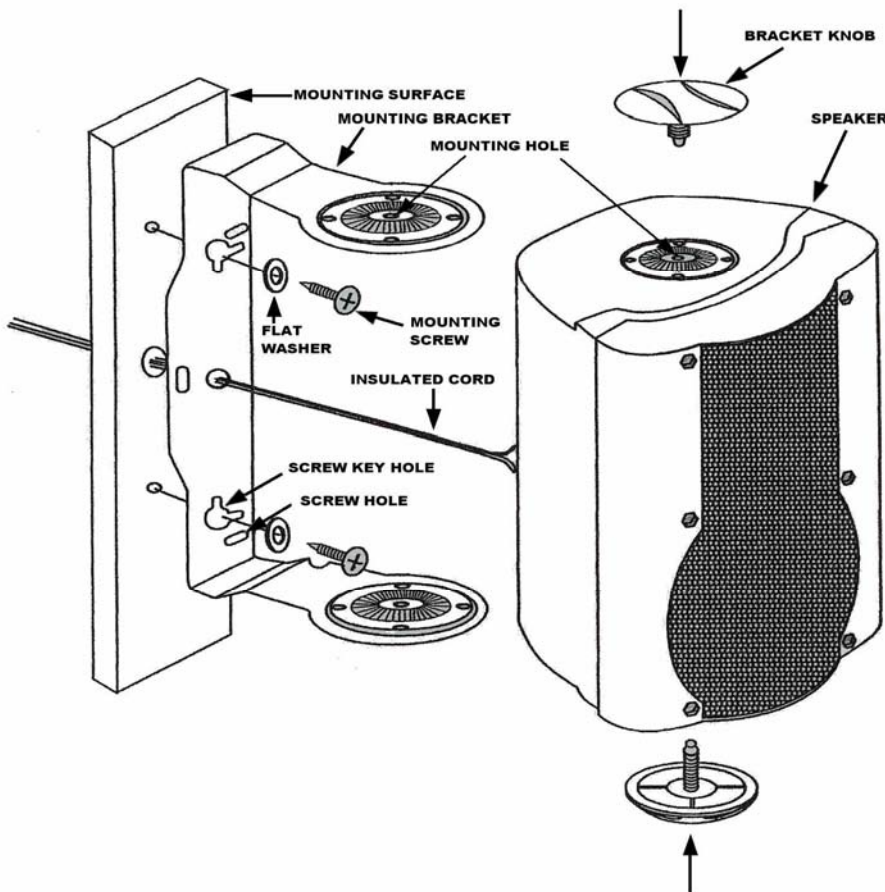

PARTS INCLUDED:

Mounting bracket	2 each
Bracket knob	4 each
Mounting screw	4 each
Flat washer	4 each
Speakers	2 each