


Go Getter Sound System

Technical Specifications



The Go Getter is perfect for voice projection in an indoor or outdoor setting, and for playing music during school activities. The unit delivers 109dB of intelligible speech, and is designed for users with little-to-no technical background.

Featuring a quick set-up and easy-to-use controls, the new Go Getter is a truly versatile sound system with true AC/DC operation, optional Bluetooth capability and improved battery life. The system is ideal for schools, corporate training, and places of worship.

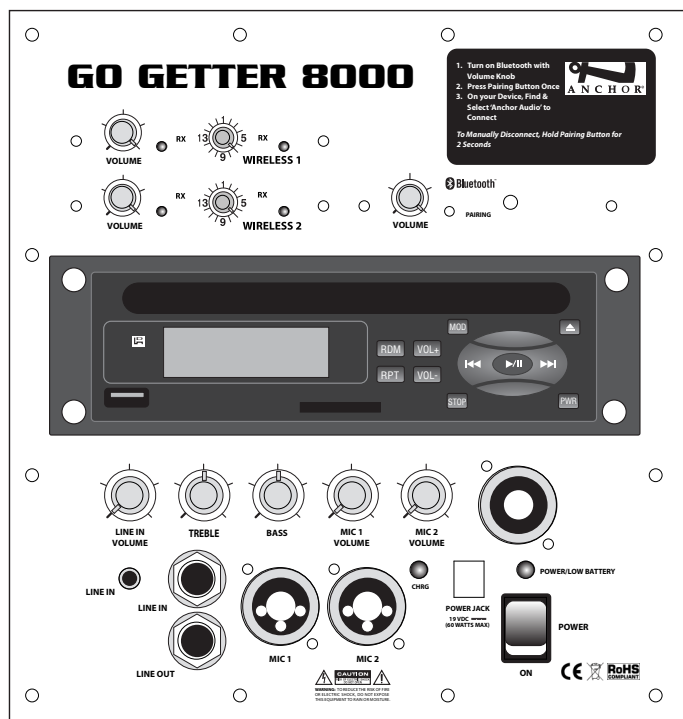

(GG-8000CU2 Back Panel Shown)

Features

- Reach Crowds of 500+
- True AC/DC - 110/220V Power Supply
- Single or Dual UHF Wireless with 16 User Selectable Channels
- Optional CD/MP3 Combo Player
- Comes with Standard Built-in Bluetooth
- Remote Control for CD/MP3 Combo Player
- LED Displays Charging and Low Battery
- Two Microphone Combo Input Jacks
- 6.5" Woven Fiber Woofer & High-Output Horn Tweeter
- Lightweight at just 20 Pounds
- Improved "Limiter" Circuitry Reduces Distortion & Increases Intelligibility
- Operates 6 - 8 Hours on a Single Charge
- Speaker Out to Power Companion Speaker

GO GETTER MODELS

GG-8000	Go Getter with Bluetooth
GG-8000U1	Go Getter with Bluetooth & 1 wireless receiver
GG-8000U2	Go Getter with Bluetooth & 2 wireless receivers
GG-8000C	Go Getter with Bluetooth & CD/MP3 combo player
GG-8000CU1	Go Getter with Bluetooth, CD/MP3 combo player & 1 wireless receiver
GG-8000CU2	Go Getter with Bluetooth, CD/MP3 combo player & 2 wireless receivers
GG-8001	Unpowered companion speaker

Touchboards

205 Westwood Ave, Long Branch, NJ 07740
 Phone: 866-94 BOARDS (26273) / (732)-222-1511
 Fax: (732)-222-7088 | E-mail: sales@touchboards.com

UHF WIRELESS

- WH-8000 Wireless handheld microphone/transmitter (540-570 MHz)
- WB-8000 Wireless body-pack transmitter (540-570 MHz) (requires handsfree microphone) Microphone options include:
 Over-the-Ear/EM-TA4F, Lapel/LM-60, Collar/CM-60, Headband/HBM-TA4F

TECHNICAL SPECIFICATIONS

Rated Power Output 75 watts AC/DC mode
 Max SPL @ Rated Power 109dB @ 1 meter
 Frequency Response 60 Hz - 16 kHz
 AC Power Reqs. 90 - 264 VAC, 50/60 Hz
 Dimensions (HWD) 18" x 11" x 9" (46 x 28 x 23 cm)
 Weight (AC/DC) 20 lbs/ 9.07 Kg

Inputs
 Microphone (Two combo) Lo-Z (1 K Ω), balanced, XLR
 12 VDC condenser microphone phantom power
 Hi-Z (10 K Ω), balanced 1/4" phone
 Hi-Z (10 K Ω), balanced 1/4" phone
 Auxiliary (line)
 Outputs
 Line (post fader) Lo-Z, buffered, 1/4" unbalanced/balanced
 Speaker Out 4-pole Neutrik Speakon[®] jack



(Features & Specifications Subject to Change Without Notice)

Anchor Audio, Inc.

Portable Sound Systems • Carlsbad, California

800.262.4671

www.anchoraudio.com