

COUNCILMAN

Conference System

Perfect for...

- City Council Meetings
- Debate Team
- Board Meetings
- Presentations, Seminars, & Conferences
- Corporate Gatherings
- PTA Meetings
- and more!



205 Westwood Ave, Long Branch, NJ 07740 Phone: 866-94 BOARDS (26273) / (732)-222-1511 Fax: (732)-222-7088 | E-mail: sales@touchboards.com




CouncilMAN



FEATURES

- Reaches crowds up to 150+
- Optional built-in wireless received
- AN-100CM+ powers up to eleven conference microphones
- Conference microphones daisy chain with standard XLR cables
- Chairman microphone can mute all delegate microphones
- Each microphone has adjustable volume control
- 3.5 mm AUX line input
- 1/4" & XLR balanced line output
- Built-in bracket mount screws for easy installation (bracket with allen wrench sold separately)

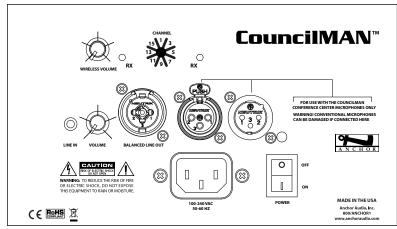





Technical Specifications		
AN-100CM+ - Speaker Monitor		
Rated power Output	30 watts	
Max SPL @ Rated Power	103 dB @ 1 meter	
Frequency Response	65 Hz – 18 kHz ± 3 dB	
Wireless Range	150' line of sight	
Speaker Type	4.5" woofer & 10 mm dome tweeter	
AC Power Requirements	110 - 125 VAC	
Fuse Rating	T 1.0A / 250 V (internally mounted)	
Export Model Fuse Rating	T o.5A / 250 V (internally mounted)	
Line In	3.5 mm	
Line Out	Lo-Z, buffered, XLR and 1/4" balanced	
Line Output Level	-20 dBV (100 mVms)	
Enclosure Material	ABS plastic	
Dimensions (HWD)	9" x 8.5" x 5.5" (23 x 21.6 x 14 cm)	
Weight	4.5 lbs / 2 Kg	
Warranty	6 years	

CouncilMAN Packages		
CM-6	One Chairman mic, five Delegate mics, one AN-100CM+ speaker monitor, five 4 ft. XLR cables, one 25 ft. XLR cable, and sturdy cardboard carrying case	
CM-6W	One Chairman mic, five Delegate mics, one AN-100CMF1+ speaker monitor with one built-in wireless receiver, one wireless handheld mic, five 4 ft. XLR cables, one 25 ft. XLR cable, and sturdy cardboard carrying case	
System Components		
AN-100CM+	Speaker monitor - black	
AN-100CMF1+	Speaker monitor & 1 wireless receiver - black	
CHM-100	Chairman microphone	
DEL-100		
DEL-100	Delegate microphone	
DEL-100	Delegate microphone Wireless Microphones & Transmitters	

Technical Specifications (cont)		
CHM-100/DEL-100 - Microphone Base		
Power Requirements	+22 VDC @ 60 mA from pin 2 of daisy chain	
Output Impedance	>10k Ω	
Phantom Power	18 V	
Dimensions (HWD)	6" x 7" x 3" (15.2 x 17.8 x 7.7 cm)	
Weight	1 lb / .45 Kg	
Daisy Chain In/Out	Male and Female 3-pin XLR	
CHM-100 Controls	Pust to Talk, Volume and Mute Others	
DEL-100 Controls	Push to Talk and Volume	
Warranty	2 years	
LM-618 - Gooseneck Microphone		
Pickup Pattern	Cardioid	
Туре	Electret condenser	
Phantom Power	9 - 52 Volts DC	
Impedance	600 Ω (balanced)	
Response	50 Hz - 18 kHz ±3dB	
Sensitivity	-56 dB @ 1 kHz open circuit (o dB = 1 V/ubar)	
Dimensions	24" long, 1/2" diameter	
Warranty	2 years	



(Features ${\cal O}$ Specifications Subject to Change Without Notice)