


Appion G5Twin Comparison vs. The Best of the Rest




Highest Performance
(overall)


R22 Direct Vapor Rates (lbs/min)

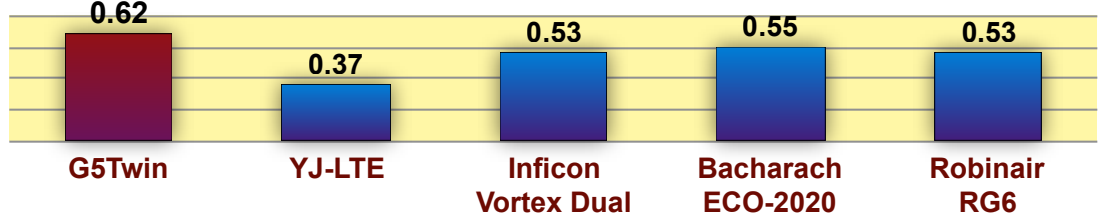


R22 Direct Liquid Rates (lbs/min)

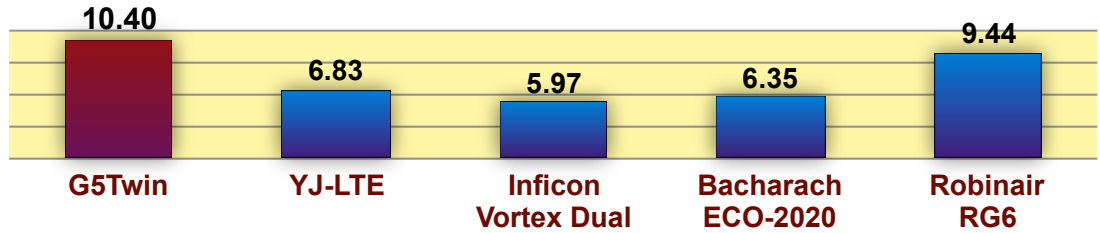


R410A Direct Liquid Rates (lbs/min)

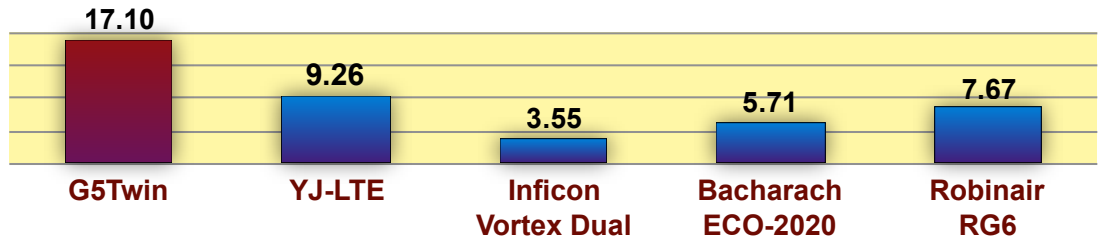

R410A Push/Pull Rates (lbs/min)

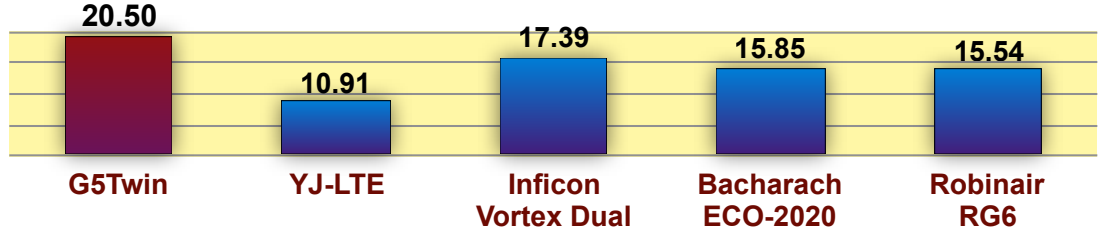

Weight

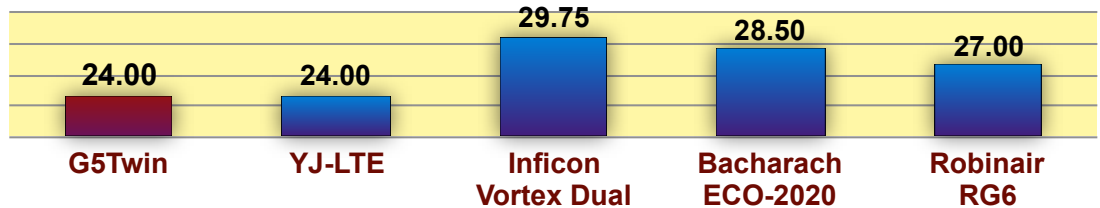

Smallest Size and Weight
13.75 X 9.4 X 10.3 inches

UL certified to meet or exceed EPA regulations per ARI 740-98. Published Results as of January 2016.

For use with class III, IV, and V refrigerants:

R-12, R-134a, R-401c, R406a, R-500, R-401a, R-409a, R-401b, R-412a, R411a, R-407d, R-22, R-411b, R-502, R-407c, R-402b, R-408a, R-509, R-407a, R-402a, R-507, R-407b, R-410a