

## GC55 Pressure Transducer

### FEATURES

- Bright LED display of pressure and switch status
- All SS wetted parts
- Internal “push-button” configurability allows quick user pressure range changes or relay adjustments
- External “push-button” allows user to display P1, P2 or DP without opening cover

### TYPICAL USES

- Tank level pressure measurement
- Pump controls
- Compressor control
- Filter monitoring
- HVAC Hydronic cooling/heating systems

### PERFORMANCE SPECIFICATIONS

Reference Temperature:	75°F (24°C)
<b>Analog Output:</b>	4-20 mA or 1-5 Vdc
Accuracy:	±0.5% of span Includes linearity, hysteresis and repeatability
Response Time:	20ms
Output Resolution:	±0.2% of span
Stability:	±0.5%/year
<b>Pressure Switch Output:</b>	
Number of Contacts:	2
Response Time:	20ms-2.0sec (by user)
Type:	TTL/CMOS up to 40 Vdc / 200 mA
Setting Accuracy:	±1.0% of span
Hysteresis:	Variable deadband (by user)
<b>Display:</b>	
Accuracy:	±1.0% of span
Type:	3½ digits, 10mm LED

### ENVIRONMENTAL SPECIFICATIONS

Temperature Limits:	Storage: -4°F to 140°F (-20°C to 60°C)
	Operating: 14°F to 122°F (-10°C to 50°C)
	Compensated: 14°F to 122°F (-10°C to 50°C)

Thermal Coefficients: Zero & Span: ±0.05% of span/°C (ref. 75°F (24°C))

### FUNCTIONAL SPECIFICATIONS

#### Static (Line) Pressure

Pressure Range:	Proof:	Burst:
75 to ≤300 psi	2 X Range (URL)	10 X Range (URL)

#### Single Side (Differential)

Pressure Range:	Proof:	Burst:
75 to ≤300 psi	2 X Range (URL)	10 X Range (URL)



**GC55**  
Pressure Transducer



### KEY BENEFITS

- Robust aluminum die cast housing
- Two sensor design well suited for high DP ranges
- Min./Max. feature records, low/high pressure events
- Two polysilicon thin film sensors to achieve wet-wet, high differential pressure measurements
- Monitors/controls a wide variety of wet/dry media

Vibration: 5g's 150Hz

Shock Effect: 10g's 16ms

Static (Line) Pressure Effects: None

### ELECTRICAL SPECIFICATIONS

Output Signal (Current): 4-20 mA (3 Wire): 15-27 Vdc 80 mA

Output Signal (Voltage): 1-5 Vdc (3 wire): 11-27 Vdc 60 mA

Rangeability/Adjustment: Zero: -5% to 105% of span  
Span: -5% to 105% of span (Accuracy based upon F.S. (URL) value)

Switch Contacts: (2) Photo MOS relay outputs; Load 200 mA (Max.), 40 Vdc; Hysteresis (variable)

## GC55 Pressure Transducer

### PHYSICAL SPECIFICATIONS

Weight:	Approx. 1.0 lb
Environmental Rating:	IP66
Mounting:	(2) 5.2mm mounting holes
Pressure Connection:	1/8 NPT Female
Electrical Connection Size:	1/2 NPT Female Conduit Cable Gland (Cable diameters 0.16" to 0.63")

### WETTED MATERIAL

Diaphragm	Process Connection	Media Compatibility
17-4PH SS	304 SS	Fluids and gases compatible with 304 SS (sensor housing) and 17-4PH SS (sensor diaphragm)

### NON-WETTED

Enclosure  
Aluminum


### OPTIONAL FEATURES

Calibration Report: 9 point NIST traceable calibration report


### TWO POLYSILICON THIN FILM SENSORS

Fully welded assembly of all SS with high overpressure capability makes the GC55 ideal for fluid pump systems in applications such as:

- Level measurement in large size and/or pressurized tanks
- Pump monitoring of building hydronic heating and cooling systems

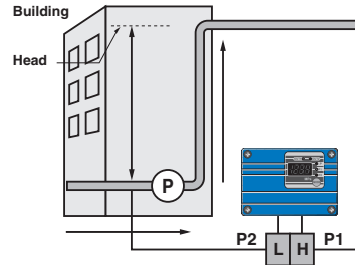

- Filter monitoring in water purification or hydraulic systems

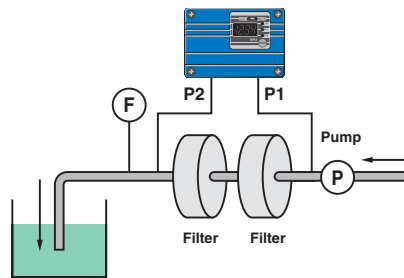

### ORDERING CODE

Example:


**GC55 7 F01 15 CG 75# -XRH**

<b>Model</b>	GC55 - wet/wet indicating differential transducer w/ switch outputs	GC55					
<b>Accuracy</b>	7 - ±0.5% of span	7					
<b>Pressure Fitting</b>	F01 - 1/8 NPT Female		F01				
<b>Output Signal</b>	15 - 1-5 Vdc 42 - 4-20 mA			15			
<b>Electrical Connection</b>	CG - Cable gland CD - 1/2 NPT Female conduit				CG		
<b>Pressure Range Differential</b>	75# - 75 psi 100# - 100 psi 150# - 150 psi 250# - 250 psi 300# - 300 psi					75#	
<b>Option (if including an option(s) must include an "X")</b>	RH - 9 pt. NIST traceable calibration certificate						X_ RH


# GC55 Pressure Transducer

**DIMENSIONS** in [ ] are millimeters


For reference only, consult Ashcroft for specific dimensional drawings

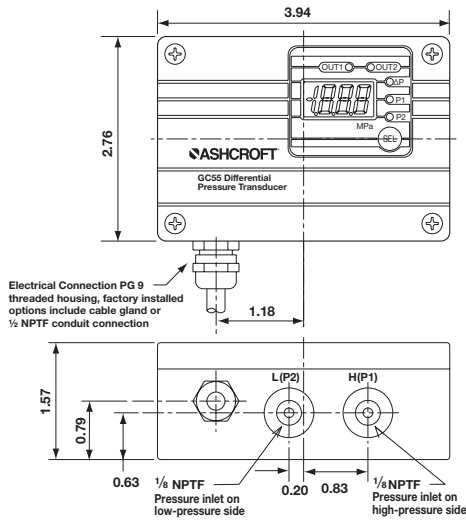

## ELECTRICAL CONNECTIONS

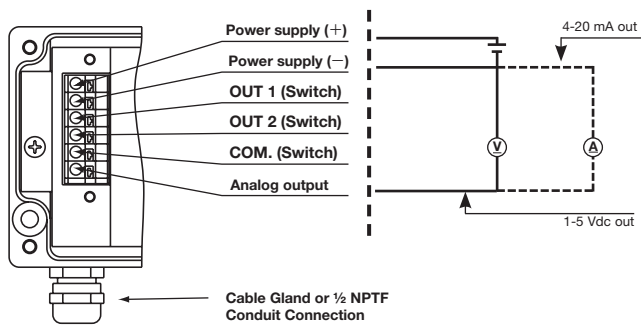

## MOUNTING DIMENSIONS

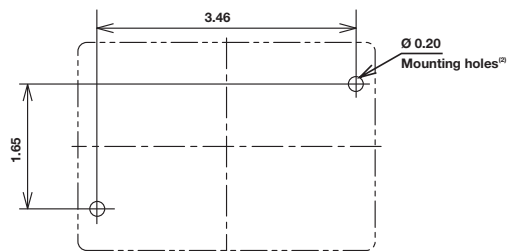

Note:  
(2) Mounting holes through back of enclosure, accessible with cover removed.