

# CS782DP

## 2-Port USB DisplayPort KVM Switch




205 Westwood Ave, Long Branch, NJ 07740  
 Phone: 866-94 BOARDS (26273) / (732)-222-1511  
 Fax: (732)-222-7088 | E-mail: sales@touchboards.com

- With the ever-growing demand for higher video quality and the evolution of DisplayPort technology, 4K-enabled computers and displays are now widely adopted in visually-intensive and commercial applications. Offering up to 4K UHD resolution, the ATEN CS782DP is at home amongst these demanding scenarios and technological advancements.

The ATEN CS782DP 2-Port USB DisplayPort KVM Switch features 4K UHD video resolution and allows users to access two 4K-enabled computers from a single USB keyboard, USB mouse, and DisplayPort video console.

Doing so with ease, the CS782DP provides three convenient switching methods – using a remote port selector, mouse, or hotkeys for flexible access to any computer connected to the installation. The product even provides premium audio support for a complete multimedia solution. To round off the entire experience, the streamlined, space-saving design of CS782DP also makes it ideal for any working environment.

With its rich feature set, the CS782DP is designed to surpass all requirements in graphic design, animation, and video-editing applications.

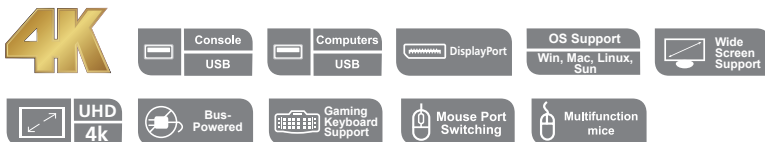

Computer Port 1



Computer Port 2



Console Port




## Features

- One DisplayPort video console controls two USB computers
- Fully DisplayPort 1.2 Compliant
- Computer selection via remote port selector, hotkeys, and USB mouse<sup>1</sup>
- Superior video quality – up to 4K UHD (3840 × 2160@60Hz)
- Multiplatform support – Windows, Mac, Sun, Linux
- HDCP Compliant
- Supports MST (Multi-Stream Transport)<sup>2</sup>, enabling multiple monitors to be used via a single DisplayPort connector
- Supports DisplayPort Dual Mode (DP++)<sup>3</sup> for directly outputting single-link DVI or HDMI signals via a powered DisplayPort-to-HDMI/DVI DP++ adapter
- Compatible with widescreen LCD monitors
- Power on detection – if either of the computers is powered off, the CS782DP will automatically switch to the other computer
- Audio-enabled – full bass response provides a rich experience for 2.1 channel surround sound systems
- Supports HD Audio<sup>4</sup> through DisplayPort playback
- Independent switching of the KVM and Audio focus<sup>4</sup> allows convenient multi-tasking
- Supports multimedia keyboards
- Supports wireless keyboards and mice
- Console mouse port emulation/bypass feature supports most mouse drivers and multifunction mice
- Mac/Sun keyboard support and emulation<sup>5</sup>
- USB 2.0 mouse port can be used for USB hub and USB peripheral sharing<sup>6</sup>
- Bus-Powered
- Firmware upgradable

### Note:

1. Mouse port switching is only supported under mouse emulation mode and by USB 3-key wheel mice.
2. MST (Multi-Stream Transport) requires either monitors that are capable of DisplayPort 1.2 daisy-chaining, or use of a powered DisplayPort MST Hub.  
The PC source must be DisplayPort 1.2 compliant.
3. DisplayPort Dual Mode (DP++) requires the use of a powered DP++ adapter. The graphics source must be DP++ compliant.
4. HD audio through DisplayPort cannot be switched independently.
5. a. PC keyboard combinations emulate Mac/Sun keyboards. b. Mac/Sun keyboards work only with their own computers.
6. This feature may require an extra power adapter to be connected to the USB hub and that the CS782DP's Mouse Emulation Mode be disabled.

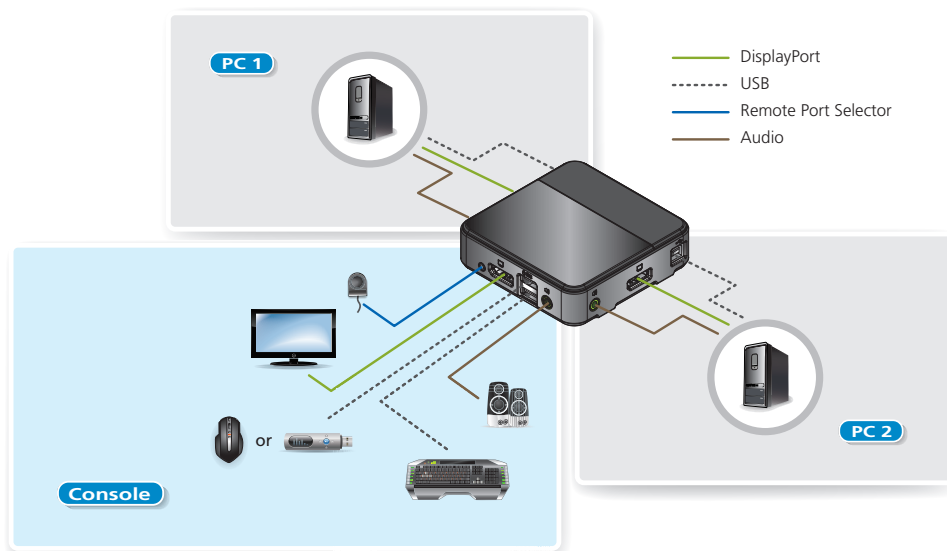

## Specifications

Function	CS782DP
<b>Computer Connections</b>	2
<b>Port Selection</b>	Hotkey, Mouse, Remote Port Selector
<b>Connectors</b>	
Console Ports	2 x USB Type A Female (Black) 1 x DisplayPort Female (Black) 1 x 3.5mm Audio Jack Female (Green)
KVM Ports	2 x USB Type B Female (White) 2 x DisplayPort Female (Black) 2 x 3.5mm Audio Jack Female (Green)
Remote Port Selector	1 x Mini Stereo Jack
<b>Cable Length</b>	
KVM	2 x 1.8 m USB Cable 2 x 1.8 m Audio Cable 2 x 1.5 m DisplayPort Cable
Remote Port Selector	1.8 m
<b>LEDs</b>	
KVM	2 (White)
<b>Emulation</b>	
Keyboard / Mouse	USB
<b>Video</b>	4K UHD (3840 x 2160 @ 60Hz)
<b>Scan Interval</b>	3, 5, 10, 20 seconds (Default: 5 seconds)
<b>Power Consumption</b>	DC 5V, 4W
<b>Environmental</b>	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 - 80% RH, Non-condensing
<b>Physical Properties</b>	
Housing	Plastic
Weight	0.12 kg
Dimensions (L x W x H)	9.37 x 9.30 x 2.68 cm

