

PN9108

8-Port Power Over the NET™


- The PN9108 Power over the NET™ is a control unit that provides remote power management for eight AC outlets via a TCP/IP connection, allowing administrators to control the power off, power on, and reboot status for each attached device from any computer connected to the Internet, whether down the hall, or half way around the world. The PN9108 is the most convenient, reliable and cost effective way to obtain access to your server room remotely.



Features

- Remote power on / off / reboot control for eight outlets via TCP/IP and a built in 10/100 Ethernet port
- Local power on / off / reboot control via the PN9108's RS-232 port to the computer's RS-232 port
- Daisy chain up to 15 additional stations to control up to 128 outlets
- Manual switching between Local and Remote access for each port via front panel push button switches
- Individual control of each port - users can set the power on sequence and delay time for each port to allow equipment to be turned on in the proper order
- Provides three configuration/management methods: Browser; Telnet; or Console Terminal
- Safe shutdown and rebooting for Windows systems*
- Overcurrent protection and recovery for each AC port (110 V model only) plus total port overcurrent protection (both models) - remote users can monitor the outlet status via the GUI interface on their browsers
- Separate circuits for the unit's power and the power to the devices – the power control status menu is still accessible even when an overload condition trips the devices' circuit breaker
- On/Off scheduling - allows everything from a one-time start/shutdown, to daily, weekly, etc. starts/shutdowns at user-specified times
- Port grouping - perform the same action on a specified group of ports

* Safe shutdown and rebooting is supported if the Power Monitor utility has been installed

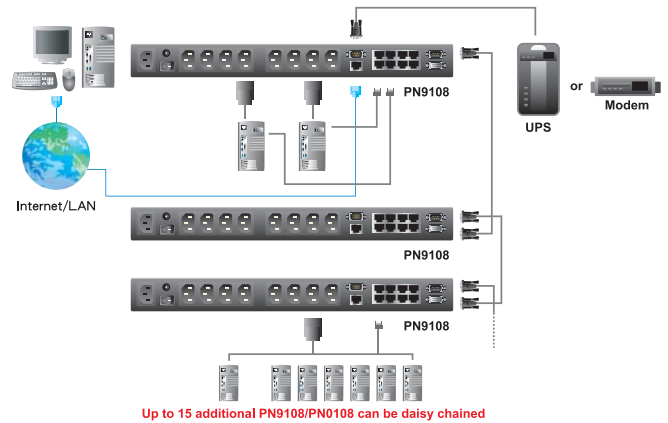

Specification

Function	PN9108	
Power Inlet	1 x IEC 60320/C14 Male	
Power Outlets	8 x IEC 60320/C13 Female	
Connectors	PON In	1 x DB-9 Female (Black)
	PON Out	1 x DB-9 Male (Black)
	Safe Shutdown	8 x 6-pin Safe Shutdown Jacks Female(Black)
	LAN	1 x RJ-45 Female (Black)
	RS-232	1 x DB-9 Male (Black)
Switches	Reset	1 x Semi-recessed Pushbutton
	Power	1 x Rocker
	Station ID Display	1 x Pushbutton
	Outlet On/Off Remote On/Off	8 x Pushbutton
LEDs	Outlet Power	8 (Orange)
	Remote Access	8 (Green)
	Link	1 (Green)
	10/100 Mbps	1 (Orange/Green)
	Power	1 (Blue)
	Current	1 (Red)
I/P Rating (Total input)	100 - 120V; 50/60Hz, 12A 220 - 240V; 50/60Hz, 10A	
O/P Rating	Per Port	100 - 120V; 50/60Hz, 9A (Max.) 220 - 240V; 50/60Hz, 9A (Max.)
	Total	100 - 120V; 50/60Hz, 11A (Max.) 220 - 240V; 50/60Hz, 9A (Max.)
Power Consumption	No Load	120V/16W; 230V/16W
	Max Load	120V/1440W; 230V/2300W
Environment	Operating Temp.	0- 40°C
	Storage Temp.	-20- 60°C
	Humidity	0-80% RH, Non-condensing
Physical Properties	Housing	Metal
	Weight	4.20 kg
	Dimensions (L x W x H)	43.72 x 26.31 x 4.40 cm

* The specifications and pictures are subject to change without notice.

