

CL1000N

LCD Console

- The CL1000N is a LCD KVM console that features an integrated 19" LED-backlit LCD panel, full keyboard, and touchpad in a 1U rack-mountable housing. This model provides convenient 'at the rack' console access to KVM switches already installed at your site.




Features

- Exclusive LED illumination light – designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- Integrated KVM console with a 19" LED-backlit LCD monitor in a sliding housing with top and bottom clearance for smooth operation in a 1U high system rack
- LCD module rotates up to 115° for a more comfortable viewing angle
- Improved design – optional single person installation kit
- Compatible with most KVM switches
- Internal power supply
- High video resolution:
 - Up to 1280 x 1024 @75Hz
 - Supports DDC, DDC2, DDC2B
 - DDC emulation of the LCD monitor – Video settings of attached computers are automatically adjusted for optimal output to the LCD monitor
- Keyboard language support: Keyboard Language supports English (US), English (UK), French, German, German (Swiss), Greek, Hungarian, Italian, Japanese, Korean, Russian, Spanish, Swedish and Traditional Chinese

Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

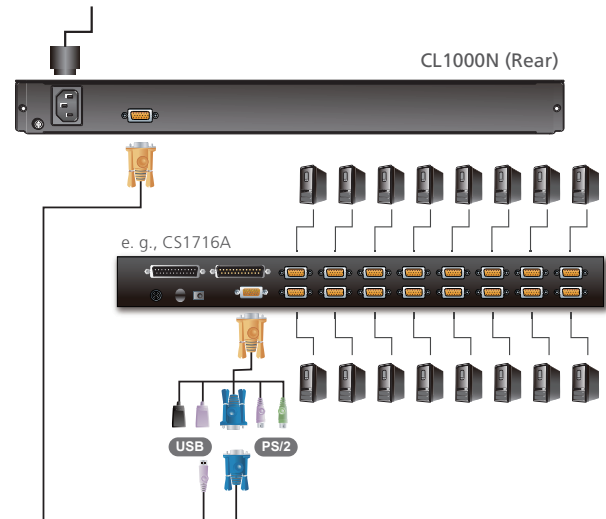

Rack Mount Kit	Depth (cm)
Long(Optional)	70 - 105
Short (Standard)	52 - 85

Easy Installation Rack Mount Kit	Depth (cm)
Long(Optional)	68 - 105
Short(Optional)	57 - 70

Specification

Function			CL1000N
Connectors	KVM Ports	Keyboard/ Video/Mouse	1 x SPHD-15 Female (Yellow)
	Power		1 x 3-prong AC Socket
Switches	LCD Adjustment		4 x Pushbuttons
	LCD Power		1 x Pushbutton
LEDs	CPU		1 (Green)
	Num Lock		1 (Green)
	Caps Lock		1 (Green)
	Scroll Lock		1 (Green)
Emulation	Keyboard/Mouse		PS/2, USB (with 2L-52 x UP USB KVM cable)
Video			1280 x 1024@75Hz; DDC2B
I/P Rating			100-240 VAC; 50/60 Hz; 1A
Power Consumption			120V, 23W / 230V, 24W
Environment	Operating Temp.		0-50°C
	Storage Temp.		-20-60°C
	Humidity		0-80% RH, Non-condensing
Physical Properties	Housing		Metal+Plastic
	Weight		11.06 kg
	Dimensions (LxWxH)		48.30 x 58.52 x 4.40 cm

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com

Printed 04/2015 V5.0



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.