

CL1008/1016 (CL1008M: 17" LCD; CL1016M: 17" LCD)

Slideaway™ LCD KVM Switch



205 Westwood Ave, Long Branch, NJ 07740
 Phone: 866-94 BOARDS (26273) / (732)-222-1511
 Fax: (732)-222-7088 | E-mail: sales@touchboards.com


- The CL1008 / CL1016 LCD KVM Switch series are control units that allow access to multiple computers from a single keyboard, video, and mouse (KVM), console. A single CL1008 or CL1016 can control up to 8 or 16 computers. As many as 15 additional KVM switches can be daisy-chained to the CL1008 / CL1016, so that up to 256 computers can all be controlled from a single KVM console.

The CL1008 / CL1016 offers a space-saving, streamlined approach to KVM switch technology by integrating a keyboard, 17" LED-backlit LCD monitor, and touchpad in a 1U rack-mountable sliding housing.



Features

- Exclusive LED illumination light - designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- KVM console with 17" LED-backlit LCD monitor in a sliding housing with top and bottom clearance for smooth operation in a 1U high system rack
- LCD module rotates up to 115 degrees for a more comfortable viewing angle
- Standard rack mount kit included – optional Easy Rack Mounting (single person installation) rack mount kit available (requires separate purchase)
- Daisy-chain up to 15 additional units – control up to 256 computers
- No software required – convenient computer selection via hotkeys and mouse driven intuitive on screen display (OSD) menus
- Auto Scan feature for monitoring user-selected computers
- Broadcast support – commands from the keyboard can be broadcast to all available computers on the installation
- Hot pluggable – add or remove computers without having to power down the switch
- Two level password security – only authorized users view and control the computers; up to four users plus an administrator with separate profiles for each
- Video settings of attached computers are automatically adjusted for optimal output to the LCD monitor
- Upgradable firmware
- Keyboard Language support: Keyboard Language supports English (US), English (UK), French, German, German (Swiss), Hungarian, Italian, Japanese, Korean, Russian, Spanish, Swedish and Traditional Chinese

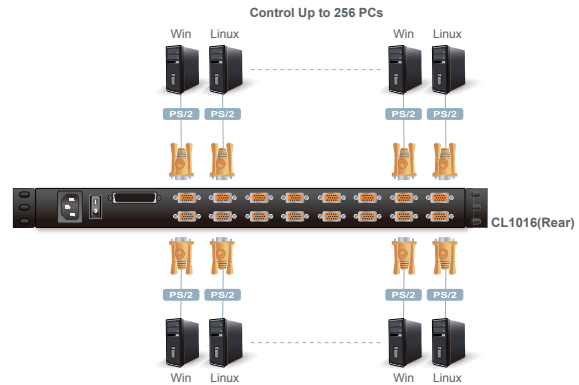

Rack Mount Kit	Depth (cm)
Long (Optional)	68 - 105
Short (Standard)	42 - 82

Easy Installation Rack Mount Kit	Depth (cm)
Long (Optional)	68 - 105
Short (Optional)	52 - 70

Specification

Function		CL1008	CL1016
Computer Connections	Direct	8	16
	Max	128 (via Daisy-chain)	256 (via Daisy-chain)
Port Selection		OSD; Hotkey; Pushbutton	
Connectors	KVM Ports	8 x SPHD Female (Yellow)	16 x SPHD Female (Yellow)
	Daisy-Chain	1 x DB-25 Male	
	FW Upgrade	1 x RJ-11 Female	
	Power	1 x 3-prong AC socket	
Switches	Reset	1 x Semi-recessed pushbutton	
	Power	1 x Rocker	
	FW Upgrade	1 x Slide	
	LCD Adjust	4 x Pushbutton	
LEDs	Port Selection	8 x Pushbutton	16 x Pushbutton
	On Line	8 (Orange)	16 (Orange)
	Selected	8 (Green)	16 (Green)
	Power	1 (Dark Green)	
Emulation	Keyboard / Mouse	PS/2	
	Video	17" LCD 1280 x 1024 @ 75 Hz; DDC2B	
	Scan Interval (OSD Select)	1-255 Seconds	
I/P Rating	100-240V AC; 50/60Hz; 1A		
Power Consumption	17" LCD	120V, 15W /230V, 17W	120V, 18W /230V, 20W
Environment	Operating Temp.	0-40°C	
	Storage Temp.	-20-60°C	
	Humidity	0-80% RH-condensing	
Physical Properties	Housing	Metal+Plastic	
	Weight	17" LCD 13.34 kg	13.55 kg
	Dimensions (L x W x H)	48.00 x 64.02 x 4.40 cm	48.00 x 64.02 x 4.40 cm

* The specifications and pictures are subject to change without notice.

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Printed 07/2015 V9.0



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.