

CS1732A/CS1734A

2/4 Port USB KVM Switch / 2 Port USB Hub

- CS1732A/CS1734A 2/4-Port KVM Switch has built-in USB on each of the front and rear panels and audio signal connectors. It allows users to control the computer and peripheral devices via a signal console at ease.




Features

- One USB console controls 2 computers and two additional USB devices
- 2 port USB Hub built in
- Dual interface supports computers with PS/2 or USB keyboards and mice
- Multiplatform support: compatible with all operation platforms PC (Windows, Linux and mostothers), Mac and Sun
- With speaker and microphone support
- Bi-directional switching and flexible interoperability; switch permits independent PC, independent peripheral, and independent audio function, regardless of KVM switch focus
- Auto PS/2 and USB interface detection
- Buzzer On/Off via hotkey
- Keyboard and mouse emulation for error free booting
- Computer selection via front panel pushbuttons and hotkeys
- Superior video quality - up to 2048 x 1536; DDC2B
- Firmware upgradable
- OS Support: Windows LINUX, Mac, Sun and FreeBSD
- SUN/Mac keyboard support and emulation*

Note: *1. PC keyboard combinations emulate SUN/Mac keyboards.
2. SUN/Mac keyboards only work with their own computers

Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

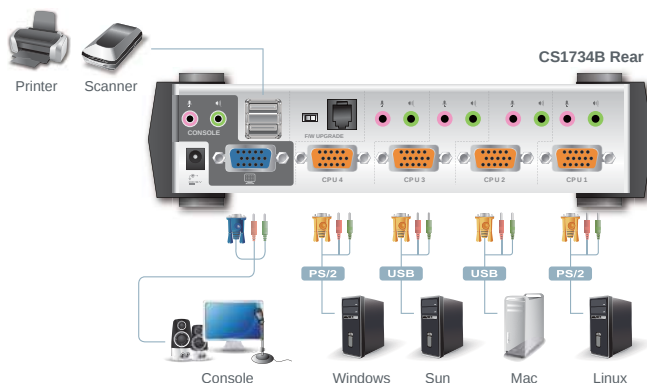

Specification

Function			CS1732A	CS1734A
Computer Connections			2	4
Port Selection			Front Panel Pushbuttons; Hotkeys	
Connectors	Console Ports	KB	1 x USB Type A F (White)	
		Video	1 x HDB-15 F (Blue)	
		Mouse	1 x USB Type A F (White)	
		Speaker	2 x Mini Stereo Jack F (Green)	
		Mic.	2 x Mini Stereo Jack F (Pink)	
	KVM Ports	KB	2 x SPHD-15 F (Yellow)	4 x SPHD-15 F (Yellow)
		Video		
		Mouse		
		Speaker	2 x Mini Stereo Jack F (Green)	4 x Mini Stereo Jack F (Green)
		Mic.	2 x Mini Stereo Jack F (Pink)	4 x Mini Stereo Jack F (Pink)
F/W Upgrade		1 x RJ11 Socket		
Power		1 x DC Jack (Black)		
USB Hub		2 x USB Type A F (Black; rear panel)		
Switches	Selected	2 x Pushbutton	4 x Pushbutton	
LEDs	On Line / Selected	2 (Orange)	4 (Orange)	
	USB Link	2 (Green)	4 (Green)	
Emulation	Keyboard / Mouse	PS/2; USB		
Video			2048 x 1536 @ 60Hz; DDC2B	
Scan Interval			1–99 seconds (Default: 5 sec)	
Power Consumption			DC5V/1.2W (max.)	DC5V/1.25W (max.)
Environment	Operating Temp.		0–50 C	
	Storage Temp.		–20–60 C	
	Humidity		0–80% RH, Non-condensing	
Physical Properties	Housing		Metal	
	Weight		0.49 kg	0.70 kg
	Dimensions		13.98 x 8.80 x 5.55 cm	21.00 x 8.80 x 5.55 cm

