

CS9138



Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

- 8-Port PS/2 KVM Switch
- CS9138 is a high-efficiency KVM Switch which provides the most efficient solution to fulfill the management needs of server networks. It is a KVM Switch with 8 ports and can control 8 computers. It allows connections in 3 tiers by cascade. With 73 sets of CS9138, users can connect up to 512 servers.




Features

- One PS/2 console controls 8 computers.
- Cascadable up to 3 levels - provides up to 512 computers.
- Computer selection via front panel pushbuttons, hotkeys or On Screen Display (OSD).
- Keyboard and mouse emulation for error free booting.
- Supports Microsoft IntelliMouse, Logitech MouseMan, FirstMouse, IBM Scrollpoint Mouse.
- OSD automatically adjusts to resolution changes.
- Auto Scan function to monitor computer operation.
- Superior video quality: up to 1920 x 1440; DDC2B.
- Available in silver and black.
- Special design for easy stacking.
- Rack mountable in 19" (1U) system rack.
- Multiplatform support: Windows 2000/XP/[Vista](#), Linux and FreeBSD.
- For more information about KVMs which can connect to CS9138, see [Compatible KVM Table](#).

Specification

Computer Connections		Direct	8
		Max.	512 (via Cascade)
Port Selection			Hotkey, Pushbutton, OSD
Connectors	Console Ports	Keyboard	1 x 6-pin Mini-DIN Female (Purple)
		Video	1 x HDB-15 Female (Blue)
		Mouse	1 x 6-pin Mini-DIN Female (Green)
	KVM Ports	Keyboard	8 x 6-pin Mini-DIN Female (Purple)
		Video	8x HDB-15 Male (Blue)
		Mouse	8x 6-pin Mini-DIN Female (Green)
	Power		1 x DC Jack (Black)
Switches	Power	8x Pushbutton	
LEDs	On Line	8 (Green)	
	Selected	8 (Orange)	
	Power	1 (Blue)	
Emulation	Keyboard	PS/2	
	Mouse		
Video			1920 x 1440; DDC2B
Scan Interval			3,5,10,15,20,30,40,60 Seconds
Power Consumption			DC9V, 1.08W
Environment	Operating Temp.		0-50°C
	Storage Temp.		-20-60°C
	Humidity		0-80% RH, Non-condensing
Physical Properties	Housing		Metal
	Weight		2.85 kg
	Dimensions (L x W x H)		45.00 x 17.00 x 6.70 cm

Diagram

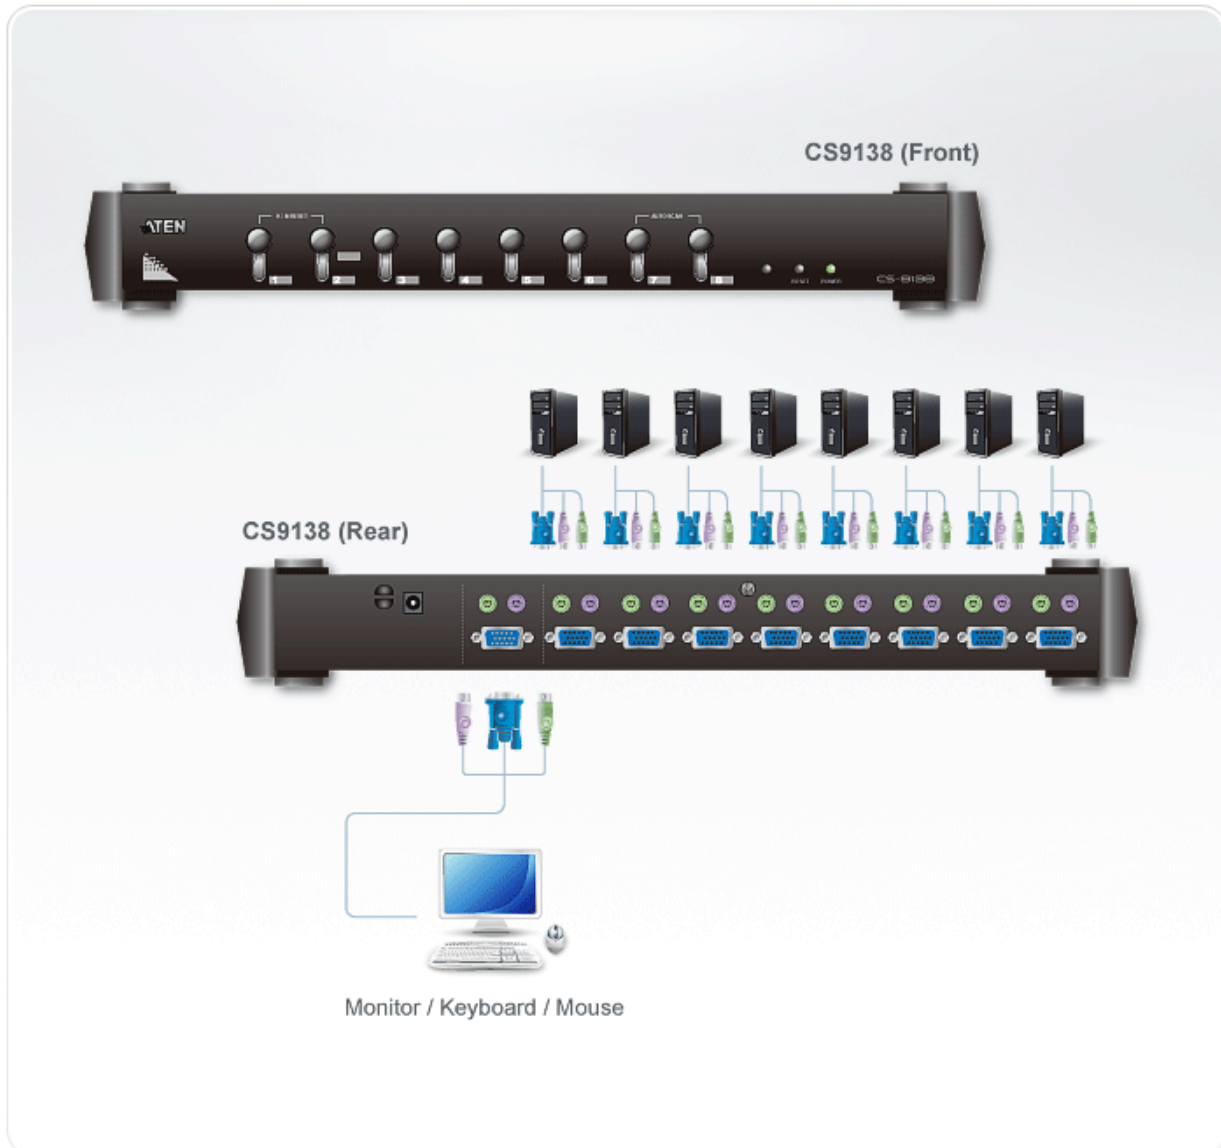

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2012 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.