

## Room Booking System — 10.1" RBS Panel

### VK430

ATEN VK430 RBS Panel is a 10.1" touch-screen panel used to manage conference rooms, and is centrally configured by ATEN RBS Configurator — centralized management software of RBS Panels while integrating with calendar servers, such as Microsoft Office 365 Calendar and Google Workspace Calendar — to provide convenient scheduling and availability allocation for all conference rooms in the system. That is, through a few simple taps, authorized personnel can make conference room reservations, extend or release room usage, and check the booking schedules of any conference room directly on the VK430 while enjoying its user-friendly interface. In addition, through ATEN RBS Configurator, administrators can have a centralized view of the availabilities and locations of all conference rooms in real time as well as manage each VK430 connected from afar, elevating meeting room utilization efficiency.

Highlighted features of the VK430 include its Power over Ethernet (PoE) support and two illuminating LED bars. With PoE, VK430 can transmit data while receiving power over a single Ethernet cable, which effectively reduces installation costs and power consumption. The two LED light bars, one on each side, illuminates in user-defined colors to indicate the availability status of the conference room, available, reserved, or occupied, and allow users to know the room's availability at a glance.

Without compromise on aesthetics, VK430 features a sleek and elegant housing that supports 75\*75 mm VESA-compliant mounting options to suit various installation scenarios. VK430 is preinstalled with its standard wall mount kit while providing 3M VHB™ Tape for it to be easily installed onto a hard or glass wall.


The VK430, along with the ATEN RBS Configurator, delivers an enterprise-grade room management solution perfect for all business environments, making meeting room management a breeze while elevating the overall room-booking experience.

Front View



Rear View



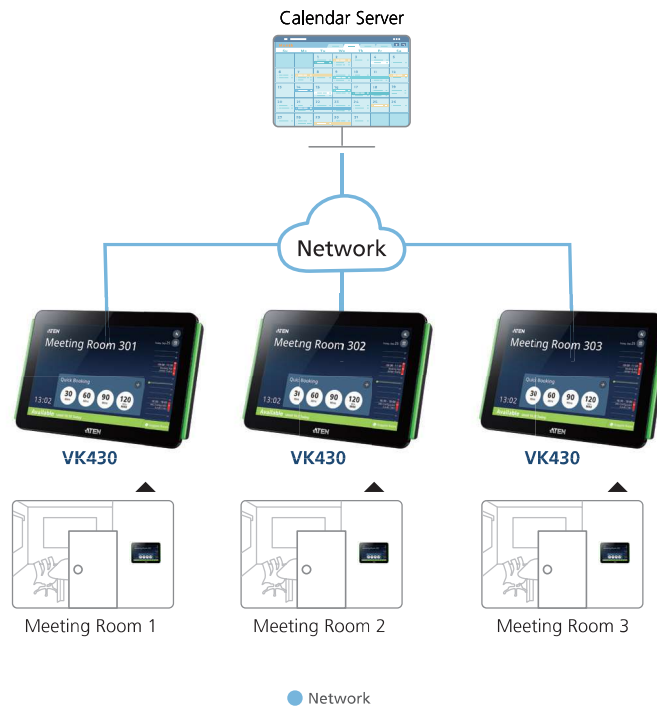

## Features

- 10.1" capacitive touch-screen panel
- Natively installed with the ATEN RBS app for integration with calendar servers, such as Microsoft Office 365 Calendar and Google Workspace Calendar
- Supports Power over Ethernet (PoE), which allows it to receive power and communication over a single Ethernet cable
- LED light bars illuminating user-defined colors to indicate the room's availability at a glance
- Preinstalled with a wall mount kit and provided with 3M VHB™ Tape for easy mounting onto a hard or glass wall
- 75\*75 mm VESA-compliant for flexible mounting across various installation scenarios

## Specifications

|                            | VK430                                   |
|----------------------------|---|
| <b>Panel Spec</b>          |   |
| Display Type               | TFT-LCD                                 |
| Size                       | 10.1"                                   |
| Touch Screen               | Capacitive                              |
| Resolution                 | 1280 x 800                              |
| Aspect Ratio               | 16 : 10                                 |
| Color Depth                | 8 bit                                   |
| Contrast Ratio             | 800 : 1                                 |
| Backlight                  | LED                                     |
| Viewing Angle              | ± 85° (H), ± 85° (V)                    |
| <b>Interfaces</b>          |   |
| Ethernet                   | 1 x RJ-45 Female, 10 / 100 / 1000 BaseT |
| USB                        | 1 x USB Type-A                          |
| <b>Power Inputs</b>        |   |
| Power over Ethernet (PoE)  | 802.3 at PoE+                           |
| <b>Power Consumption</b>   |   |
|                            | DC12V:17.8W:60.70 BTU; PoE:20W:68.24BTU |
| <b>Environmental</b>       |   |
| Operating Temperature      | 0 – 40 °C                               |
| Storage Temperature        | -10 – 55 °C                             |
| Humidity                   | 10 - 80% RH, Non-Condensing             |
| <b>Physical Properties</b> |   |
| Housing                    | Plastic                                 |
| Weight                     | 0.9 kg                                  |
| Dimensions (L x W x H)     | 26.3 x 17.78 x 3.72 cm                  |

Product information is subject to change without prior notice.

### ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com

Released: 04/2022 V3.0

© Copyright 2022 ATEN® International Co. Ltd.  
 ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.

