



CL01

Professional PTZ Camera Controller

Product Specifications

I/O Interface	Communication	RS-485, RS-422, RS-232, IP, Micro USB for firmware upgrades
	Baud Rate	2400, 4800, 9600, 19200, 38400 bps
User Interface	Display	OLED display screen
	Rotation Button	3
	Camera Shortcut Channel	7
	Joystick	1
	Keyboard	Backlit Keys
Camera Control	IP Address	Default: 192.168.1.162 / 163 / 164 / 165 / 166 / 167 / 168 (from Cam 1 to Cam 7)
	UDP Port	08090
	Cam ID	1 to 7
	Control Protocol	VISCA, SONY VISCA , Pelco-D/P, UDP, IP (VISCA over IP)
System	Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
	Dimensions	173 mm (W) x 99 mm (H) x 350 mm (D)
	Gross Weight	2.5 kg
	Power Source	DC 12V/2A, AC 100-240V
	Power Consumption	24 W
	Application	Indoor
	Package Content	User manual / 4-pin RS485 terminal / power adapter
	Part Number	PTCAMCTRL

Hardware Specifications


Top



Rotation Button

Joystick

Back

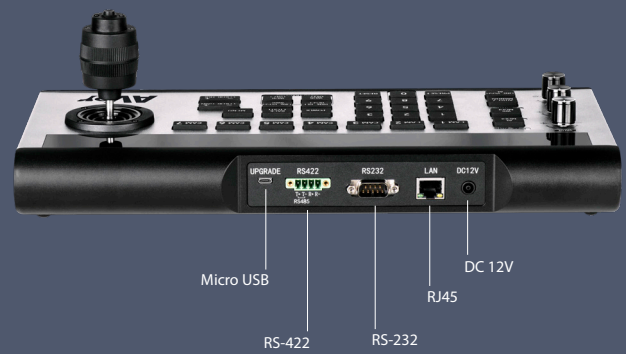

Micro USB

RS-422

RS-232

RJ45

DC 12V



AVer Information Inc. Americas
668 Mission Court, Fremont, CA 94539
Toll free 1.877.528.7824 T 408.263.3828 F 408.263.8132

©2019 AVer Information Inc. All rights reserved.

All brands and logos are trademarks of their respective companies. Specifications subject to change without notice

pro.averusa.com