

DIGITAL PROJECTOR | MH740




Features

- Full HD (1920x1080) Resolution
- 4,000 ANSI Lumens; 11,000:1 Contrast Ratio
- Big Zoom Ratio: 1.5x
- SmartEco™ Power Saving Technology
- 3D PC & Blu-Ray Ready



Input and Output Terminals

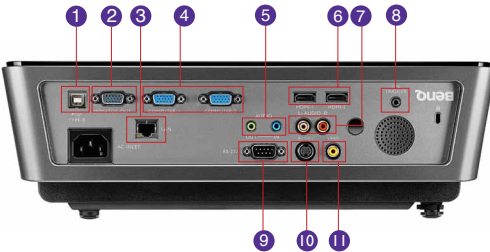

- | | |
|------------------------------|-----------------------------|
| 1 USB (Type B) | 7 Audio L/R In (RCA) |
| 2 Monitor Out (D-sub 15pin) | 8 DC 12V Trigger |
| 3 LAN (RJ-45) | 9 RS232 (DB-9pin) |
| 4 Computer-1/2 (D-sub 15pin) | 10 S-Video (Mini DIN 4-pin) |
| 5 Audio In/Out (Mini Jack) | 11 Composite Video in (RCA) |
| 6 HDMI -1/2 | |

Specifications

| | |
|---------------------------------|---|
| Projection System | DLP® |
| Native Resolution | Full HD (1920x1080) |
| Brightness | 4000 ANSI Lumen |
| Contrast Ratio | 11000:1 |
| Display Color | 1.07 Billion Colors |
| Lens | F=2.42~2.97, f=20.7~31.05mm |
| Aspect Ratio | Native 16:10 (5 aspect ratio selectable) |
| Throw Ratio | 1.378~2.067 |
| Image Size Diagonal | 26" ~ 300" |
| Zoom Ratio | 1.5x |
| Lamp Type | 310W |
| Lamp(Normal/Economic/SmartEco)* | 2500/3000/3500 hours |
| Keystone Adjustment | 1D, Vertical +/- 40 degrees |
| Projection Offset | Vertical: 130% ±5% |
| Resolution Support | VGA(640 x 480) to UXGA(1600 x 1200) |
| Horizontal Frequency | 15K-102KHz |
| Vertical Scan Rate | 23-120Hz |
| Compatibility | HDTV Compatibility: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility: NTSC, PAL, SECAM 3D Compatibility: Frame Sequential: Up to 720p Frame Packing: Up to 1080p Side by Side: Up to 1080i/p Top Bottom: Up to 1080p |
| Interface | Computer in (D-sub 15pin) x 2 HDMI x 2 Monitor out x 1 Composite Video in (RCA) x 1 S-Video in x 1 Audio in (Mini Jack) x 1 Audio in (L/R) x 1 Audio out (Mini Jack) x 1 Speaker 5W x 1 LAN(RJ-45) x 1 USB (Type B) x 1 DC 12V Trigger (3.5mm Jack) x 1 RS232 (DB-9pin) x 1 IR Receiver x 2 (Front + Rear) |
| Dimensions (WxHxD) | 14.1" x 4.7" x 10.2" (w/ feet) |
| Weight | 8.14 lbs (3.7 kg) |
| Power Supply | AC100 to 240 V, 50 to 60 Hz |
| Power Consumption | 370W(Normal), 300W(Eco), Standby<0.5W |
| Audible Noise | 38/33 dBA (Normal/Economic mode) |
| On-Screen Display Languages | Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages) |
| Picture Mode | Dynamic/Presentation/sRGB/Cinema/User 1/User 2 |
| Accessories (Standard) | Carry Bag, Remote Control w/ Battery, User Manual CD, Lens Cover, Power Cord, VGA Cable, QSG, Warranty Card |
| Accessories (Optional) | Spare Lamp Kit P/N: 5J.J8805.001 Ceiling Mount P/N: 5J.J4N10.001 Carry Bag P/N: 5J.J4R09.001 Remote P/N: 5J.J8A06.001 |
| UPC Code / Part # | 8400460-2968-5 / 9H.JAT77.23A |
| Limited Warranty | 3 Years Parts & Labor / 1 Year or 2000 Hours of Lamp Life |

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.



BenQ America Corp.
www.BenQ.us

BenQ is a registered trademark of BenQ Corp. DLP is a registered trademark of Texas Instruments. All rights reserved. Product names, logos, brands, and other trademarks featured or referred to in this materials are the property of their respective trademark holders. Specifications subject to change without notice.

MH740 | 11-07-13-BQus




MH740 Digital Projector

Distance Chart

Installation for a 16:9 ratio screen


| Image Size | | | | Distance (inch) | | | Offset (inch) |
|------------|------|---------------|--------------|-----------------|---------|--------------|-------------------------|
| Diagonal | | Height (inch) | Width (inch) | Min distance | Average | Max distance | A (inch) @ Wide mode |
| Inch | mm | | | | | | |
| 50 | 1270 | 24.5 | 43.5 | 60.9 | 75.9 | 91.0 | 3.6 |
| 60 | 1524 | 29.4 | 52.1 | 73.1 | 91.2 | 108.8 | 4.4 |
| 70 | 1778 | 34.3 | 61.0 | 85.2 | 106.4 | 127.5 | 5.1 |
| 80 | 2032 | 39.2 | 69.7 | 97.4 | 121.6 | 145.7 | 5.8 |
| 90 | 2086 | 44.1 | 78.4 | 109.6 | 136.8 | 163.9 | 6.6 |
| 100 | 2540 | 49.0 | 87.1 | 121.8 | 152.0 | 182.1 | 7.4 |
| 110 | 2794 | 53.9 | 95.8 | 134.0 | 167.2 | 200.3 | 8.1 |
| 120 | 3048 | 58.8 | 104.6 | 146.2 | 182.4 | 218.5 | 8.8 |
| 130 | 3302 | 63.7 | 113.3 | 158.3 | 197.5 | 236.8 | 9.5 |
| 140 | 3556 | 68.6 | 121.8 | 170.5 | 212.7 | 255.0 | 10.3 |
| 150 | 3810 | 73.5 | 130.7 | 182.7 | 227.9 | 273.2 | 11.0 |
| 160 | 4064 | 78.4 | 139.4 | 194.9 | 243.1 | 291.4 | 11.7 |
| 170 | 4318 | 83.3 | 148.1 | 207.1 | 258.3 | 309.6 | 12.5 |
| 180 | 4572 | 88.2 | 156.8 | 219.3 | 273.6 | 327.8 | 13.2 |
| 190 | 4826 | 93.1 | 165.5 | 231.4 | 288.8 | 346.1 | 13.9 |
| 200 | 5080 | 98.0 | 174.3 | 243.7 | 304.0 | 364.3 | 14.7 |
| 250 | 6350 | 122.5 | 217.9 | 304.6 | 380.0 | 455.3 | 18.3 |
| 300 | 7620 | 147.1 | 261.4 | 365.5 | 456.0 | 546.4 | 22.0 |

Floor Installation

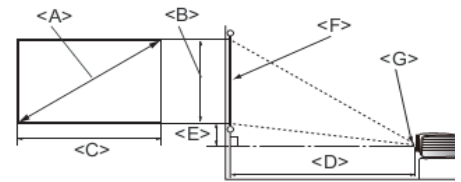


<F>: Screen <G>: Center of lens

Ceiling Installation

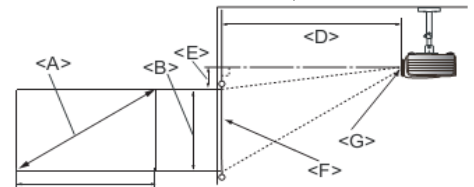

<F>: Screen <G>: Center of lens

Ceiling Mount Chart

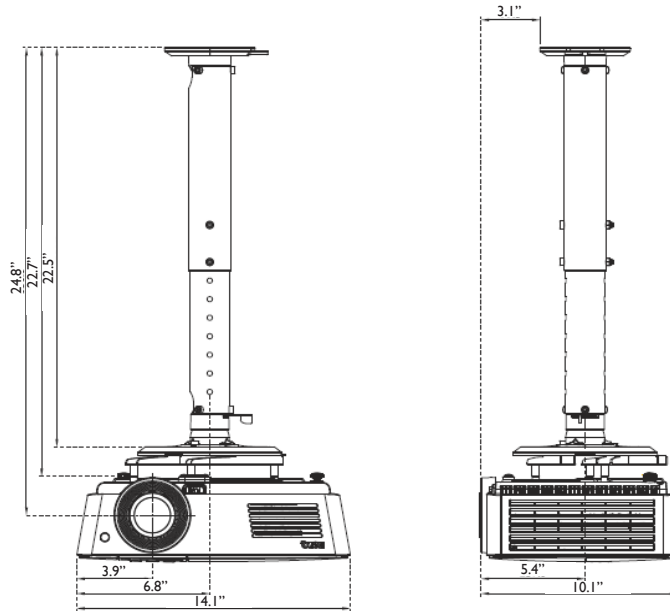

Touchboards

205 Westwood Ave, Long Branch, NJ 07740
 Phone: 866-94 BOARDS (26273) / (732)-222-1511
 Fax: (732)-222-7088 | E-mail: sales@touchboards.com

Units: inch

Dimensions

