



Because it matters

Dealer's Stamp

<b>Headquarters</b> BenQ Corporation 16 Jihu Road, Neihu, Taipei 114, Taiwan Tel : +886-2-2727-8899 Fax : +886-2-2656-2438	<b>Asia Pacific</b> BenQ Asia Pacific Corp. 12 Jihu Road, Neihu, Taipei 114, Taiwan Tel : +886-2-2727-8899 Fax : +886-2-2656-2438	<b>China</b> BenQ (IT) Co., Ltd. 181 Zhuyuan Road, Suzhou New District, Suzhou, China Tel : +86-512-6807-8800 Fax : +86-512-6809-7010	<b>North America</b> BenQ America Corp. 3200 Park Center Drive, Suite 150 Costa Mesa, CA 92626 U.S.A. Tel : +1-714-559-4900 Fax : +1-714-557-0200	<b>Europe</b> BenQ Europe B.V. Meerenakkerweg 1-17, 5652 AR Eindhoven, The Netherlands Tel : +31(0) 88-888-9200 Fax : +31(0) 88-888-9299	<b>Latin and Central America</b> BenQ Latin America Corp. 8200 N.W. 33 Street, Suite 301 Miami, FL 33122 U.S.A. Tel : +1-305-421 1200 Fax : +1-305-421 1201
---	--	--	---	--	---

© 2022 BenQ Corp. Specification may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively  
Doc: PDP\_ST4302S/ST5502S/ST6502S/ST7502S/ST8602S\_DS\_EN\_202203

# All-in-One

## Smart Signage with Ultra-Thin Bezels




## BenQ Smart Signage Series



Because it matters

# All-in-one smart signage with ultra-thin bezels

The ST02S upgrades enterprise, corporate and organizational conference capabilities while maintaining superb return on investment. Visuals come across in 4K ultra HD with vivid colors and sharp contrast on thin-bezel screens, putting an end to vague, blurry image quality that detracts from the impact and sheer productivity of teleconferencing.

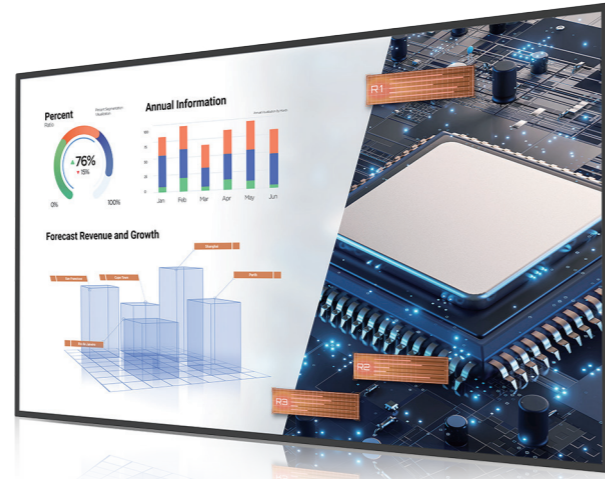

## Made for Effective Meetings and Presentations



### Successful Meetings via Optimal Clarity

4K ultra-high definition resolution (3840 x 2160) offers the most exquisite image detail for breathtaking meeting experiences.



### True 4K UHD Detail


The ST02S is engineered to give users a more expansive canvas to showcase presentation, designs, ideas, and plans.

## Easy-to-go Stand

Enables smart signage solutions with versatility on a whole new level. With removable wheels, the easy-to-go stands let you quickly move signage from one meeting room to another to maximize usability, reduce complexity, and save on unnecessary costs.



## Work, Done More Effective



### Hassle-free Video Conferencing

Start video meetings with a simple click on the ST02S. The OPS slot-in PC is fully compatible with top video conferencing solutions such as Zoom Rooms, Microsoft Teams, Google Meet, and Cisco Webex. Team-Viewer Meeting is also pre-installed on all ST series displays.

### All Ready for “Bring Your Own Device” with InstaShare

Two-way mirroring and two-way touch control, plus up to 4 split screens supported - that's got you covered on your favorite personal devices, so go ahead and BYOD.



### Built-In Android OS


Saves users the need for an external device as a source for an operating system, and means more gets done directly on digital signage for increased efficacy and user convenience.

### Plug and Play

Lets you access and play multimedia files directly from a USB flash drive without requiring a PC connection or complicated setup.

### Match your corporate image

The ST02S has a friendly interface, allowing you to switch and customize the default wallpaper to show your corporate image.

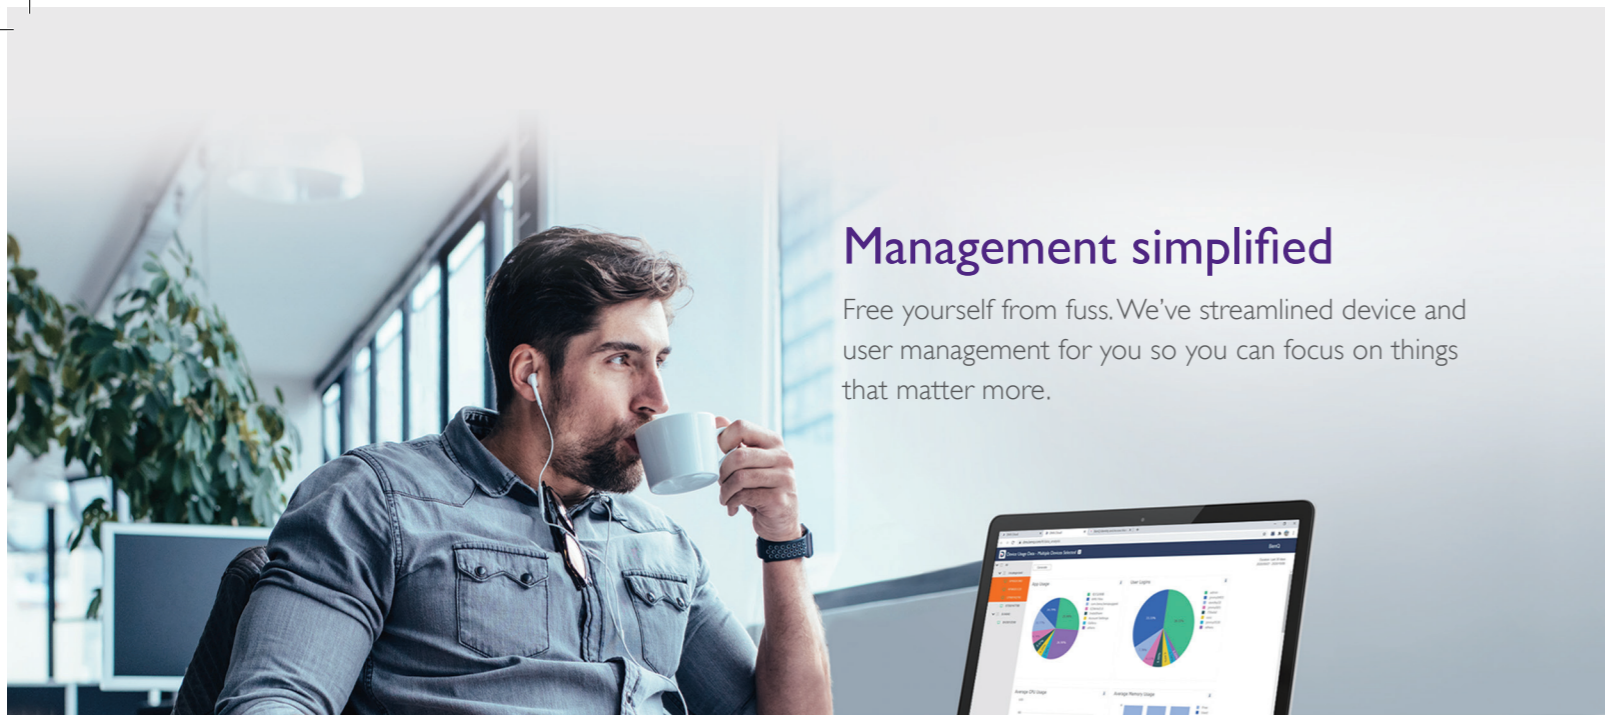

## Management simplified

Free yourself from fuss. We've streamlined device and user management for you so you can focus on things that matter more.

### Display Management System (DMS)

Centralized display management and the ability to keep display firmware and apps up to date via LAN or Internet.



Device Info and Management



Apps Management



OTA (Over-the-Air) Update



Dashboard

### X-Sign CMS and Broadcasting Software

Edit, manage, and customize content in depth through the intuitive X-Sign Content Management Software (CMS), included with the displays. Additionally, X-Sign Broadcast keeps teams in the know with a smart broadcasting system that offers instant delivery and easy management of push alerts, messages, and announcements.



Scheduled Broadcasting



Live Streaming



Group Message Broadcasting



YouTube Videos

### Data and device protection

Protect your displays against malware while securing corporate data. BenQ offers data security and device protection with McAfee Mobile Security.



## Specifications

Models	ST6502S	ST7502S	ST8602S
<b>Panel</b>			
Screen Size (inch)	65"	75"	86"
Backlight	Direct LED	Direct LED	Direct LED
Active Area (horizontal × vertical)(mm)	1428.6 × 803.5 mm	1649.7 × 927.9 mm	1894.0 × 1066.0 mm
Resolution (pixels)	3840 × 2160	3840 × 2160	3840 × 2160
Brightness (typical)	400 nits	400 nits	400 nits
Contrast Ratio (typical)	1200:1	1200:1	1200:1
Light Life (typical)	30,000hrs	30,000hrs	30,000hrs
Display Orientation	Landscape	Landscape	Landscape
<b>Audio</b>			
Internal Speaker (Amp)	10W × 2	10W × 2	10W × 2
Audio In/Out	PC Audio Input × 1 / Line Out × 1	PC Audio Input × 1 / Line Out × 1	PC Audio Input × 1 / Line Out × 1
<b>Connectivity</b>			
VGA In/Out	x1 / N/A	x1 / N/A	x1 / N/A
DVI In/Out	x1 / N/A	x1 / N/A	x1 / N/A
HDMI In/Out	x3 (2.0) / NA	x3 (2.0) / NA	x3 (2.0) / NA
USB port (Type A)	x2 (2.0)	x2 (2.0)	x2 (2.0)
RJ45 Port	x1	x1	x1
OPS-Slot	x1	x1	x1
Micro SD card	x1	x1	x1
<b>Control</b>			
RS232 In/Out	x1 / x1	x1 / x1	x1 / x1
IR In/Out	x1 / x1	x1 / x1	x1 / x1
<b>Power</b>			
AC/DC In	AC	AC	AC
Voltage	100 ~ 240Vac, 50Hz / 60Hz	100 ~ 240Vac, 50Hz / 60Hz	100 ~ 240Vac, 50Hz / 60Hz
Power Consumption (typical /standby )	132W / <0.5W	170W / <0.5W	310W / <0.5W
<b>Mechanical</b>			
Dimension (WxHxD) (mm)	1462.3 × 837.3 × 68.9	1683.5 × 961.7 × 82.9	1929.0 × 1100.0 × 79.4
Bezel Width (top/bottom/left/right) (mm)	14.9/14.9/14.9/14.9	14.9/14.9/14.9/14.9	15.5/15.5/15.5/15.5
Weight (w/o Packing/ w/ Packing) (kg)	29.0 / 37.4	36.0/46.1	50.0 / 64.3
Wall Mounting (VESA) (mm)	400 × 400 (4 holes); 4-M6 × 15L	600 × 400 (4 holes); 4-M8 × 15L	600 × 400 (4 holes); 4-M8 × 15L
<b>Environment</b>			
Operation Temperature	0°C ~ 40°C	0°C ~ 40°C	0°C ~ 40°C
Storage Temperature	-20°C ~ 60°C	-20°C ~ 60°C	-20°C ~ 60°C
Usage (Hour/Day)	18/7	18/7	18/7
<b>OSD</b>			
On-Screen Display Languages	EN/EF/GM/DT/PL/RS/CZ/DN/SW/IT/RM/FN/NG/GK/HG/SP/EP/TC/CN/AB/JP/TH/PS/VT/KR/TR/ID/HE (28 Langue)	EN/EF/GM/DT/PL/RS/CZ/DN/SW/IT/RM/FN/NG/GK/HG/SP/EP/TC/CN/AB/JP/TH/PS/VT/KR/TR/ID/HE (28 Langue)	EN/EF/GM/DT/PL/RS/CZ/DN/SW/IT/RM/FN/NG/GK/HG/SP/EP/TC/CN/AB/JP/TH/PS/VT/KR/TR/ID/HE (28 Langue)
<b>Software</b>			
Digital Broadcasting	X-Sign Broadcast	X-Sign Broadcast	X-Sign Broadcast
CMS	X-Sign 2.0	X-Sign 2.0	X-Sign 2.0
Device Management	DMS Cloud/Local	DMS Cloud/Local	DMS Cloud/Local
Video Conference	Teamviewer Meeting	Teamviewer Meeting	Teamviewer Meeting
Office Document Viewer	WPS	WPS	WPS
Browser	Firefox	Firefox	Firefox
Maintenance	Teamviewer QS	Teamviewer QS	Teamviewer QS
<b>Accessory</b>			
Remote Control	Yes	Yes	Yes
Power Cord(by region)	Yes	Yes	Yes
VGA/HDMI/DVI/DP/USB(for touch) Cable	No / x1 / No / No / No	No / x1 / No / No / No	No / x1 / No / No / No
Quick Start Guide	Yes	Yes	Yes
User's Manual Electronic File	Yes	Yes	Yes

