

Large Venue Keep the lights On

Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

SU931 | SX930

INTEGRATORS CHOICE



Brilliant Image, High Performance WUXGA or XGA Native Resolution



Featuring the brightness and connectivity levels preferred by integrators for large venue applications, the BenQ S9 series projectors are ideal for use in corporate environments, higher education and house of worship installations where large, bright, crystal clear images are desired when the lights are on.

Image Preferred by Most

With up to 7000 ANSI lumens and remarkable contrast ratios, BenQ S9 series projectors deliver bright, crystal-clear large screen presentations with stunning color accuracy and crisp, readable text in large venues, even with the lights on, thanks to BenQ's Colorific technology.

Ideal Connectivity

Equipped with an extensive list of standard features, including Dual HDMI inputs with MHL compatibility for today's digital sources, legacy analog VGA connectivity, Vertical and Horizontal keystone geometric correction, Corner Fit geometric correction, powerful 20-Watt audio, Microphone in support, USB power to support accessories, LAN monitoring and control, compatible with AMX, Extron, Crestron and PJ Link and much more.

Key Features

- Up to 7000 Lumens for bright, crystal clear large venue presentations
- 1.6X Big Zoom provides greater projector placement possibilities
- Dual HDMI inputs with MHL compatibility
- Vertical Lens Shift for maximum installation flexibility
- Vertical and Horizontal keystone geometric correction
- Corner Fit Geometric Correction
- 20W audio allows presenters to be clearly heard
- USB Power keeps accessories charged at all times
- LAN Control and monitoring compatible with AMX, Extron, Crestron and PJ Link

Additional Features

- Independent 3D color management for precise color tuning
- Direct Power On, automatically powers the projector when power is applied
- Full HD 3D for immersive presentations
- VGA Signal Power On, automatically powers the projector on when computer is connected
- Teaching Templates, recreates commonly used notebook patterns on the screen
- Microphone Input Support
- Closed Captioning
- Eco Blank Mode
- PJ-Link compatibility, easy remote management
- Keypad lock-out feature
- Variable Stereo sound output
- Top Cover lamp access for easy maintenance



BenQ.us • BenQ.ca

BenQ is a registered trademark of BenQ Corp. All rights reserved. Product names, logos, brands, and other trademarks featured or referred to in this material are the property of their respective trademark holders. Specifications subject to change without notice.
SU931_120815




Because it matters

SPECIFICATIONS	SU931	SX930
Projection System	DLP®	
Native Resolution	WUXGA (1920 x 1200)	XGA(1024x768)
Brightness	6,000AL	7,000AL
Contrast Ratio	3,000:1	2,500:1
Display Color	1.07 Billion Colors	
Lens	F=2.45~3.07, f=15.78 ~ 25.12	F=2.1~2.63, f=21.7~34.64
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)	Native 4:3 (5 aspect ratio selectable)
Throw Ratio	1.07~1.71	1.5~2.4
Image Size	60"~240"	60"~300"
Zoom Ratio	1.6X	
Lamp Type	465W	
Lamp Mode (Normal/Eco)*	2000/2500 hours	
Keystone Adjustment	2D, Vertical & Horizontal ± 30 degrees	
Projection Offset	102.5% ±2.5%	107.5% ±2.5%
Lens Shift	Vertical +2.5%	Vertical +5%
Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200)	
Horizontal Frequency	15~102KHz	
Vertical Scan Rate	23~120Hz	
Compatibility	HDTV Compatibility: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility: NTSC, PAL, SECAM	
Interface	Computer in (D-sub 15pin) x 1 (Shared with component) Monitor out (D-sub 15pin) x 1 Composite Video in (RCA) x 1 S-Video in (Mini DIN 4pin) x 1 HDMI x 2 (One with MHL) Audio in (Mini Jack) x 1 Audio L/R in (RCA) x 1 Audio out (Mini Jack) x 1 Microphone in (Mini Jack) x 1 Speaker 10W x 2 USB (Type A) x 1 (1.5A power supply) USB (Type mini B) x 1 (Download & page/down) LAN (RJ45) x 1 (LAN control) RS232 (DB-9pin) x 1 DC 12V Trigger (3.5mm Jack) x 1 IR Receiver x 2	
Dimensions (WxHxD)	17.5" x 5.9" x 13.2" / 446 x 152 x 336 mm	
Weight	14.7 lbs / 6.7 kgs	
Power Supply	AC100 to 240 V, 50 to 60 Hz	
Power Consumption	Typical 620W, Network standby <6W, Standby power <0.5W	
Power Management Function	Automatic power off after 20 minutes without a display source.	
Audible Noise	39/36 dBA (Normal/Economic mode)	
Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	
Picture Mode	Bright/Presentation/sRGB/Cinema/(3D)/User 1/User 2	
Accessories (Standard)	Remote Control w/ Battery, Power Cord, User Manual CD, Quick Start Guide, Warranty Card, VGA(D-sub 15pin) Cable	
Accessories (Optional)	Spare Lamp Kit P/N: 5J.JEH05.001 (SU931) / P/N: 5J.JEG05.001 (SX930) Ceiling Mount P/N : 5J.JAM10.001 3D Glasses P/N: 5J.J9H25.001	
UPC / Part #	8400460-3323-1 / 9H.JEH77.15A	8400460-3322-4 / 9H.JEG77.15A
Limited Warranty	3 Years Parts/Labor; 1 Year or 2,000 hours of lamp life	



INPUT / OUTPUT TERMINALS

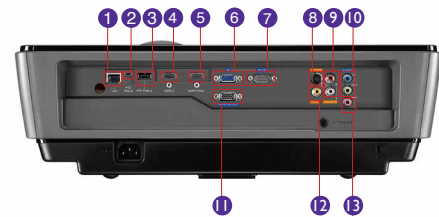

- 1 LAN (RJ45)
- 2 USB (Type mini-B)
- 3 USB (Type A)
- 4 HDMI 2
- 5 HDMI 1 / MHL
- 6 Computer in (D-sub 15pin)
- 7 RS232 (DB-9pin)
- 8 S-Video in (Mini DIN 4pin)
- 9 Audio L/R in (RCA)
- 10 Audio In & Out (Mini Jack)
- 11 Monitor out (D-sub 15pin)
- 12 Composite Video in (RCA)
- 13 Microphone in (Mini Jack)

SPARE LAMP KIT



SU931 : 5J.JEH05.001



SX930: 5J.JEG05.001

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.