

DIGITAL PROJECTOR | SX920

Touchboards

205 Westwood Ave, Long Branch, NJ 07740
 Phone: 866-94 BOARDS (26273) / (732)-222-1511
 Fax: (732)-222-7088 | E-mail: sales@touchboards.com



Features


- Native XGA (1024 x 768) resolution
- 5,000 ANSI lumens
- 3,000:1 high contrast ratio
- Vertical lens shift
- 1.6x zoom
- Easy installation and control



Specifications

Projection System	DLP®
Native Resolution	XGA (1024 x 768)
Brightness	5,000 AL
Contrast Ratio	5,000:1
Display Color	1.07 Billion Colors
Lens	F=2.45~3.07, f=15.78 ~ 25.12
Aspect Ratio	Native 4:3 (5 aspect ratio selectable)
Throw Ratio	1.41~2.25
Image Size (Diagonal)	60"~240"
Zoom Ratio	1.6X
Lamp Type	370W
Lamp (Normal/Economic Mode)*	2000/2500 hours
Keystone Adjustment	2D, Vertical & Horizontal ± 30 degrees
Projection Offset	107.5% ±2.5%
Lens Shift	Vertical: +7.5%
Resolution Support	VGA(640 x 480) to UXGA(1600 x 1200)
Horizontal Frequency	15K~102KHz
Vertical Scan Rate	24~120Hz
Compatibility	HDTV Compatibility: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility: NTSC, PAL, SECAM
Interface	Computer in (D-sub 15pin) x 1 (Share with component) Monitor out (D-sub 15pin) x 1 Composite Video in (RCA) x 1 S-Video in (Mini DIN 4pin) x 1 HDMI x 2 (One with MHL) Audio in (Mini Jack) x 1 Audio L/R in (RCA) x 1 Audio out (Mini Jack) x 1 Speaker 20W LAN (RJ45) x 1 (LAN control) USB (Type Mini-B) x 1 (Download) USB (Type A) x 1 (5V/ 1.5A Power Supply) RS232 (DB-9pin) x 1 DC 12V Trigger x 1 IR Receiver x 2
Dimensions (WxHxD)	16.1" x 4.6" x 10.5" / 411.4x118.4x267.5 mm
Weight	10.8 lbs / 4.9kgs
Power Supply	AC100 to 240 V, 50 to 60 Hz
Power Consumption	Typical 490W, Network standby <6W, Standby power <0.5W
Power Management Function	Automatic power off after 20 minutes without a display source.
Audible Noise	36/33 dBA (Normal/Economic mode)
Languages	(28 Languages)
Picture Mode	Bright/Presentation/sRGB/Cinema/(3D)/User 1/User 2
Accessories (Standard)	Remote Control w/ Battery, Power Cord, User Manual CD, Quick Start Guide, Warranty Card, VGA(D-sub 15pin) Cable
Accessories (Optional)	Spare Lamp Kit P/N: 5J.JDP05.001 Ceiling Mount P/N: 5J.JAM10.001 3D Glasses P/N: 5J.J9H25.001 QP01 P/N: 5J.JCK28.A01
UPC / Part #	8400460-3265-4 / 9H.JDP77.15A
Limited Warranty	3 Years Parts/Labor; 1 Year or 2,000 hours of lamp life

Input and Output Terminals

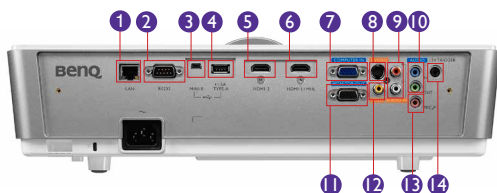

- | | |
|-----------------------------|------------------------------|
| 1 LAN (RJ45) | 8 S-Video in (Mini DIN 4pin) |
| 2 RS232 (DB-9pin) | 9 Audio L/R in (RCA) |
| 3 USB (Type Mini B) | 10 Audio in/out (Mini Jack) |
| 4 USB (Type A) | 11 Monitor out (D-sub 15pin) |
| 5 HDMI-2 | 12 Composite Video in (RCA) |
| 6 HDMI-1 / MHL | 13 MIC |
| 7 Computer in (D-sub 15pin) | 14 12V Trigger |

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.



BenQ.us • BenQ.ca

BenQ is a registered trademark of BenQ Corp. All rights reserved. Product names, logos, brands, and other trademarks featured or referred to in this material are the property of their respective trademark holders. Specifications subject to change without notice.

SX920 | 12415

BenQ

Because it matters