


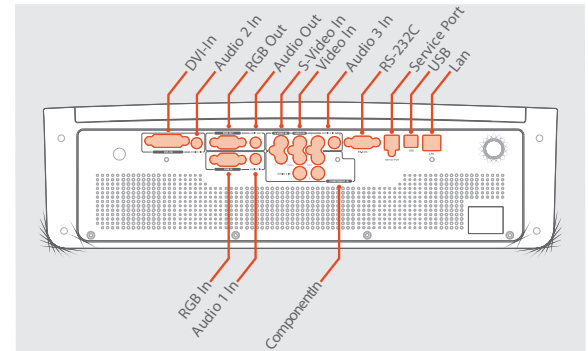
|                             |  |
|-----------------------------|--|
| Model                       | PRO4200SL-NL   |
| Technology                  | .74" 3LCD   |
| Brightness                  | 4200 Lumens (standard) 3200 Lumens (economy)   |
| Native Resolution           | 1280 x 800 (WXGA)  |
| Supported Resolution        | 1600 x 1200 (UXGA)   |
| Colors                      | 16.7 Million   |
| Brightness Uniformity       | 85%<   |
| Projection Methods          | Tabletop front/rear; Ceiling front/rear  |
| Contrast Ratio              | 600:1  |
| Aspect Ratio                | Native 16:10; Compatible 16:9, 4:3   |
| Image Size                  | 40 in to 300 in / 1.02 m to 7.6 m  |
| Projection Distance         | 4 ft to 36 ft / 1.22 m to 10.97 m  |
| Lens                        | Manual zoom and focus  |
| Keystone Correction         | Vertical +/- 30 degrees  |
| Horizontal Scan Rate        | 31 to 92 kHz   |
| Vertical Scan Rate          | 48 to 120Hz  |
| Audio Output                | 1 x 8W mono speaker  |
| Lamp                        | 330W (standard) / 264W (economy)   |
| Lamp Life                   | 2000 (standard) / 3000 (economy)   |
| Remote Control              | Multi-function IR remote with laser pointer  |
| Noise Level                 | 38dB (standard) / 34dB (economy)   |
| Power Supply                | AC Input 100-240V  |
| Power Consumption           | 450W<br><1W in standby mode  |
| Computer Compatibility      | UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA resized; VESA standards; PC and Macintosh compatible   |
| Video Compatibility         | EDTV (480p), HDTV (720p, 1080i), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM   |
| Connectivity                | Component (RCA x3) DVI-I, VGA-in, composite video, S-video, RCA stereo audio-in (x2), mini-jack audio-in (x2), USB for mouse control, VGA-out, mini-jack audio-out |
| Service and Network Control | RS232X, RJ45   |
| Weight                      | 16.7 lbs / 7.6 kg with lens  |
| Dimensions (W x H x D)      | 18.9 in x 6.1 in x 14.4 in / 48 cm x 15.5 cm x 36.6 cm   |
| Operating Temperature       | N/A  |
| Standard Accessories        | AC power cord, VGA cable, USB cable, remote control with batteries, user manual (CD)   |
| Optional Accessories        | Optional lenses, replacement remote control, harsh environment filter component, video cable, DVI-D cable, ceiling mount, S-video cable, carrying case             |
| OPTIONAL LENSES             |  |
| PRO5000SL-911               | 1.8 - 2.3 Zoom Ratio 1.27  |
| PRO5000SL-912               | 2.3 - 2.8 Zoom Ratio 1.25  |
| PRO5000SL-913               | 3.1 - 4.1 Zoom Ratio 1.26  |




\* Shown with lens

## Key Features

- Five auto features (Auto search, Auto sync, Auto ceiling, Auto keystone and Auto filter alert)
- 4200 lumens with multiple lens options
- Email Monitoring
- Robust input panel
- Optional harsh environment filter
- RJ45 network ready
- Side changing lamp and filter



Throw Distance (ft)

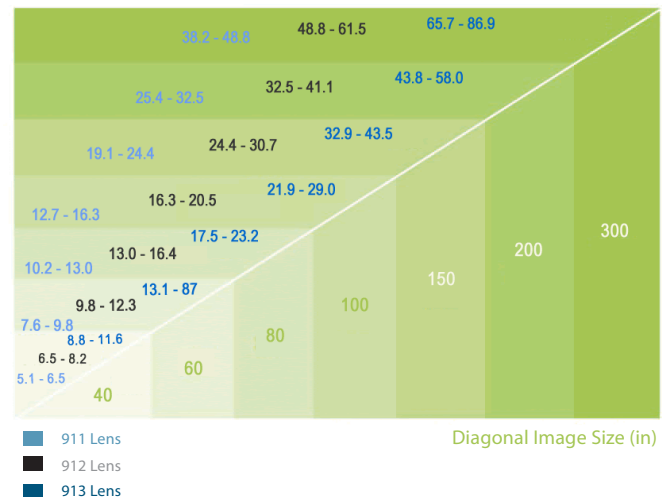

### Award Winning Technical Support 24/7/365

And, of course, all BOXLIGHT products come with free lifetime technical support. Speak with a hands-on, in-house, ISF Certified® technician ready to service your projector should the need arise.