

**NEW**

# CORNER SPEAKER

Model: C9278

70  
volt  
8 $\Omega$



The C9278 is a commercial/residential speaker which can be installed in corners and flat walls in a single, two and three speaker combination. Universal mounting brackets are included to mount the C9278 in the following configurations:

- Array 1 – in a 90° corner as a single speaker
- Array 2 – in a flat wall as a single or two-piece speaker forming a semi-circle
- Array 3 – in a 270° corner as a three-piece speaker forming a 3/4 circle



**Array 1**  
Corner or Flat Wall



**Array 2**  
Flat Wall



**Array 3**  
Corner



**RESIDENTIAL**

- Commercial/Residential Speaker
- Selectable Switch – 8  $\Omega$  and 70 V Combination
- 5", 2-Way Speaker
- 50 W Power at 8  $\Omega$
- 70 V Transformer Tap – 3.75, 7.5, 15, 30 W
- Universal Mounting Brackets Included
- White or Black
- CE Certified



**RETAIL**

**Envirōtainment™**

**Touchboards**

205 Westwood Ave, Long Branch, NJ 07740  
Phone: 866-94 BOARDS (26273) / (732)-222-1511  
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

**OWI**<sup>®</sup>  
OWI Incorporated  
Established 1978  
www.owi-inc.com

**NEW**

# CORNER SPEAKER

**Model: C9278**

The C9278 is a commercial/residential speaker which can be installed in corners and flat walls in a single, two and three speaker combination. Universal mounting brackets are included to mount the C9278 in the following configurations:

- Array 1 – in a 90° corner as a single speaker
- Array 2 – in a flat wall as a single or two-piece speaker forming a semi-circle
- Array 3 – in a 270° corner as a three-piece speaker forming a 3/4 circle




*Engineered for Corners or Flat Walls in Retail Stores, Atriums or Patios*



**70**  
volt  
**8<sub>Ω</sub>**

**CE**

GENERAL SPECS	C9278 (CE Certified)
Description:	5.25" 2-Way Speaker System
Outdoor:	No
Impedance:	8 Ω
Dispersion:	90° H x 90° V
Sensitivity (1W / 1M):	90 dB
Max Power:	50 W @ 8 Ω
Nominal Power:	3.75, 7.5, 15, 30 W
Frequency Response:	110 Hz – 20 kHz
Crossover:	6 dB @ 5 kHz
High Frequency Driver:	0.5" Tweeter
Low Frequency Driver:	5.25" Woofer
Woofer Size:	1 ea. 5.25"
Woofer Material:	Cellulose Fiber Paper
Tweeter(s):	1 ea.
Tweeter Size:	0.5"
Tweeter Material:	PEI
Grill Material:	CRS (Cold Rolled Steel)
Enclosure:	ABS Plastic Enclosure
Dimensions LxWxH Inches (mm):	9 x 6.8 x 12.2" (230 x 175 x 310mm)
Weight (Lbs.):	4 Lbs.
Color(s):	Black, White
Paintable:	Yes

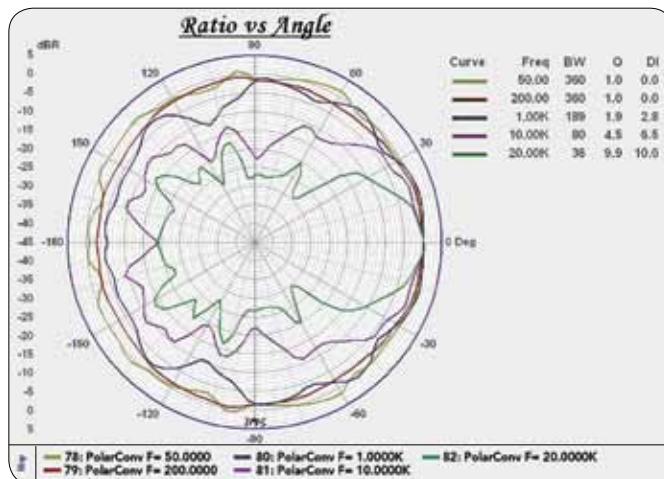

## RECOMMENDED ACCESSORIES

- OWI1070M – Attenuator, Mono, 70 V, 10 W Max
- OWI3570M – Attenuator, Mono, 70 V, 35 W Max
- OWI7570M – Attenuator, Mono, 70 V, 75 W Max
- OWI2570M – Attenuator, Stereo, 70 V, 25 W Max
- 25WPVC – Waterproof Volume Control, Impedance Matching, 25 W RMS
- 72WPVC – Waterproof Volume Control, Impedance Matching, 72 W RMS

**OWI**<sup>®</sup>  
OWI Incorporated  
Established 1978