


CUTTING CAPACITY

DO NOT CUT ACSR OR ENERGIZED LINE

CU - 1000 KCMIL

AL - 1200 KCMIL

MAX INSUL. DIA. - 1.90 IN. [48.0]

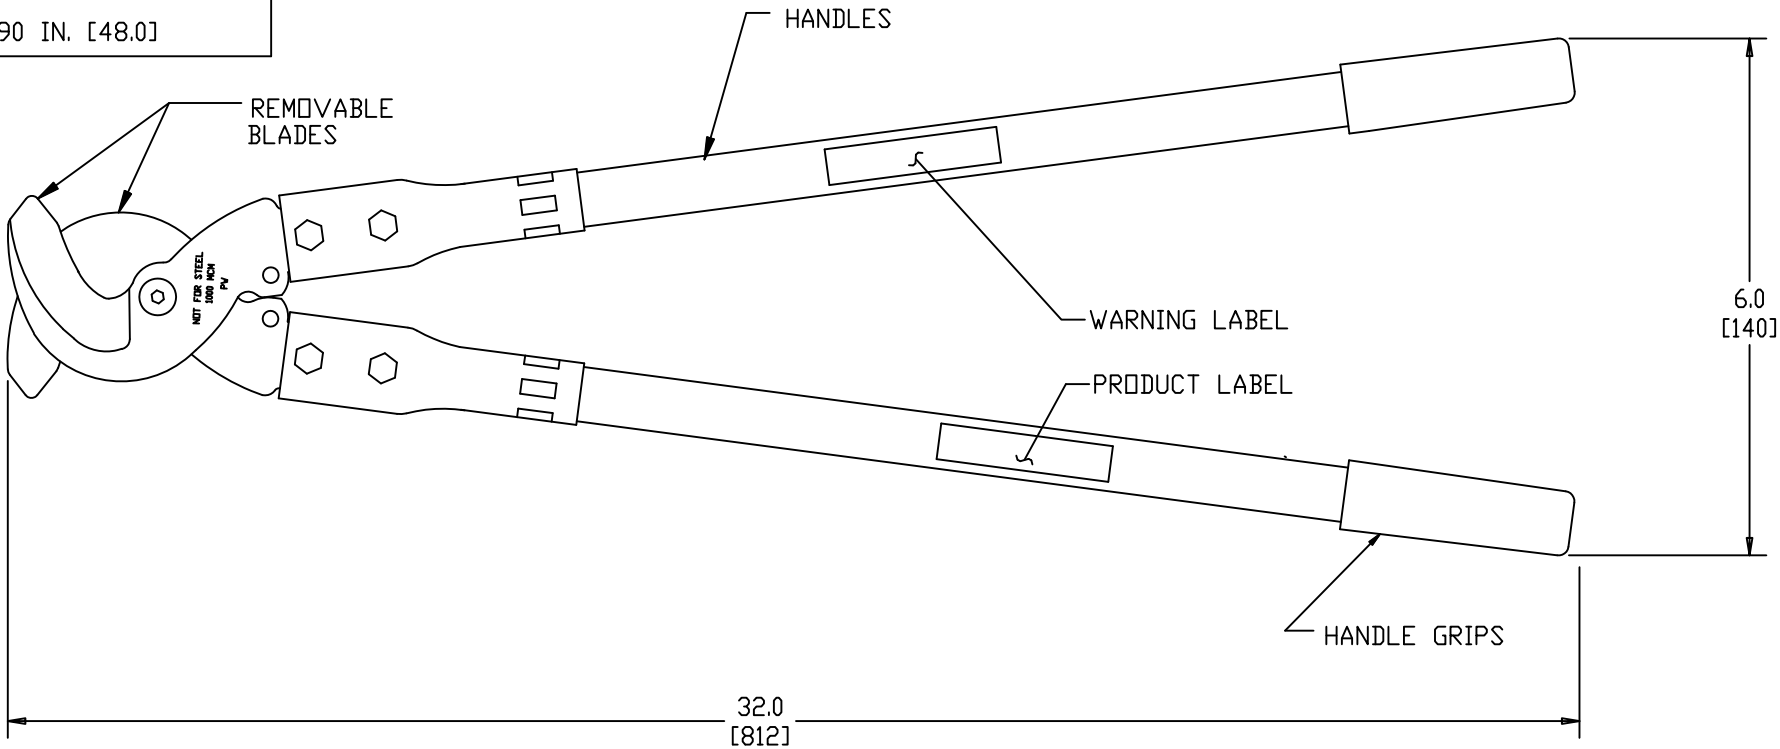

NOTES:

READ AND FOLLOW ALL INSTRUCTIONS PROVIDED BY THE OPERATOR'S MANUAL AND WARNING LABELS BEFORE USING THIS TOOL.

DIMENSIONS IN [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE SPECIFIED. METRIC DIMENSIONS ARE FOR REFERENCE ONLY.

SPECIFICATIONS

WEIGHT: 9.0 LBS. [4.0 KG].

JAWS:
PATENTED HIGH STRENGTH STEEL, AND REPLACEABLE (CAT. NO.: MCC1000BLADESET. INCLUDES TWO BLADES), YIELDING MINIMUM CONDUCTOR DISTORTION.

HANDLES:
FIBERGLASS WITH COMFORT GRIP DESIGN AND ERGONOMIC HANDLE ENDS PROVIDES A POSITIVE ANTI-SLIP GRIP.

FIBERGLASS HANDLE MATERIAL MEETS OR EXCEED ASTM F711. (100 kv/ft. DIELECTRIC STRENGTH)

TO ORDER BURNDY® PRODUCTS CALL

UNITED STATES:
1-800-346-4175 (LONDONDERRY, NH)

CANADA:
1-800-361-6975 (QUEBEC)
1-800-387-6487 (ALL OTHER PROVINCES)

FOR PRODUCT INFO: <http://www.burndy.com>

MANUAL CABLE CUTTER TOOL

ITEM NO: --

CAT NO: MCC1000

SCALE: NTS	
DRAWN BY: D. DOBRINSKI 03/18/98	
CHECKER: D. DOBRINSKI 03/18/98	
DSN APPVL: G. HESKEY 03/04/98	
MFG APPVL: S. GRAY 03/04/98	
QC APPVL: B. HARDGROVE 03/04/98	
MKT APPVL: --	
PROD FAM: --	
PROJECT #: --	SIZE
DOCUMENT TYPE: Sales	D
REL LEVEL: AutoCAD	

DRAWING NO	REV
SE211277	A
SHEET 1 OF 1	