


CUTTING CAPACITY DO NOT CUT OR ENERGIZED LINE
CU – 600 KCMIL AL – 600 KCMIL MAX INSUL. DIA. – 1.31 IN. [33]

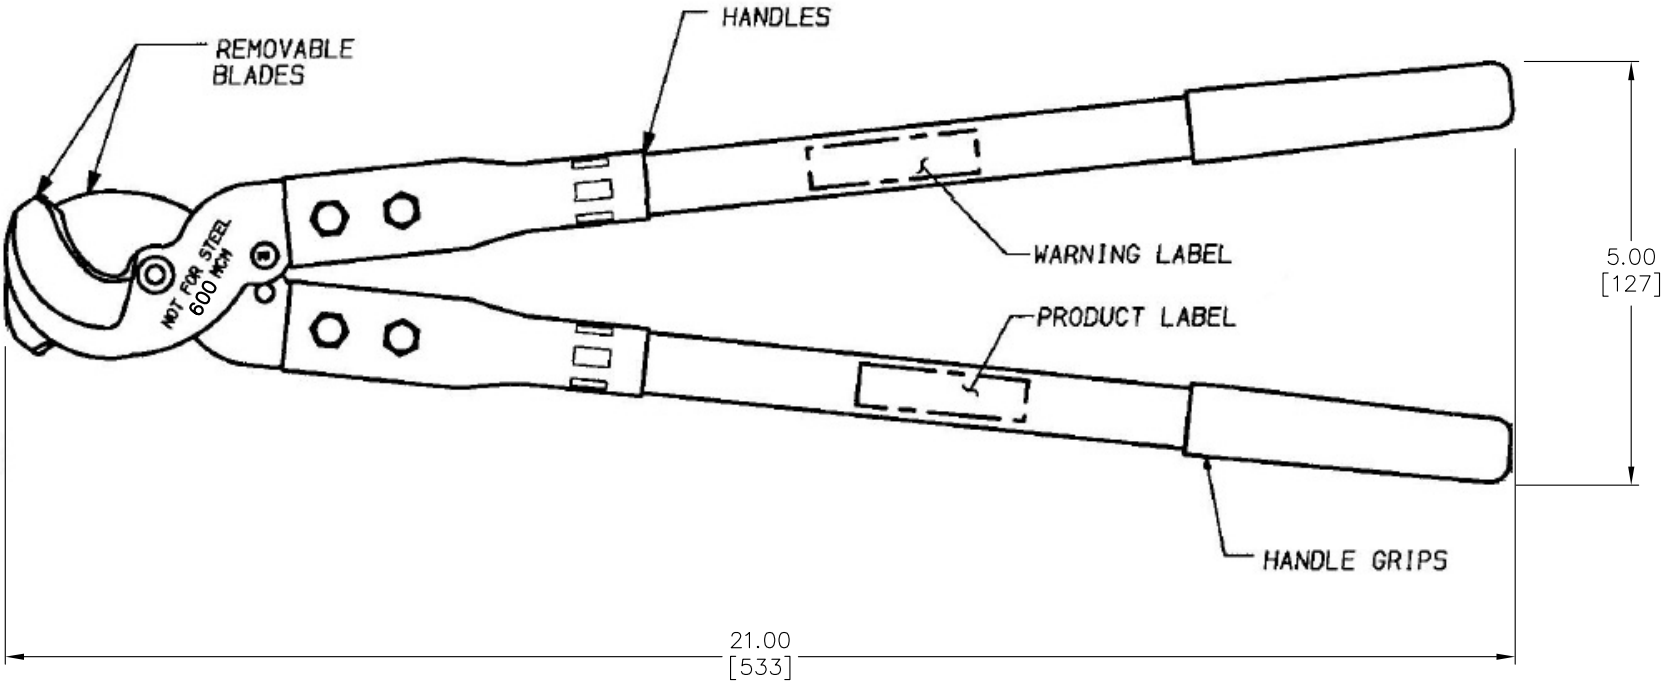

NOTES:

READ AND FOLLOW ALL INSTRUCTIONS PROVIDED BY THE OPERATOR’S MANUAL AND WARNING LABELS BEFORE USING THIS TOOL.

DIMENSIONS IN [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE SPECIFIED. METRIC DIMENSIONS ARE FOR REFERENCE ONLY.

SPECIFICATIONS:

WEIGHT: 3.5 LBS. [1.5 KG].

JAWS:
PATENTED HIGH STRENGTH STEEL, AND REPLACEABLE. (CAT. NO.: MCC600BLADESET. INCLUDES TWO BLADES), YIELDING MINIMUM CONDUCTOR DISTORTION.

HANDLES:
FIBERGLASS WITH COMFORT GRIP DESIGN AND ERGONOMIC HANDLE ENDS PROVIDE A POSITIVE ANTI–SLIP GRIP.

FIBERGLASS HANDLE MATERIAL MEETS OR EXCEEDS ASTM F711.
(100 kV/ft. DIELECTRIC STRENGTH)

TO ORDER BURNDY® PRODUCTS CALL

UNITED STATES:
1–800–346–4175 (LONDONDERRY, NH)

CANADA:
1–800–361–6975 (QUEBEC)
1–800–387–6487 (ALL OTHER PROVINCES)

FOR PRODUCT INFO: <http://www.burndy.com>

MANUAL CABLE CUTTER TOOL			
ITEM NO: 50009948			
CAT NO: MCC600			
SCALE: NTS			
DRAWN BY: R. BOISVERT 10/17/12			
CHECKER: P. WASON 10/19/12			
DSN APPVL: P. WASON 10/15/12			
MFG APPVL: S. GANYAW 10/17/12			
QC APPVL: C. KOWALCZYK 10/17/12			
MKT APPVL: --		DRAWING NO	REV
PROD FAM: --		50009950	B
PROJECT #: --	SIZE		
DOCUMENT TYPE: Sales	D	SHEET 1 OF 1	
REL LEVEL: AutoCAD			