



# Nio

DIGITAL SIGNAGE

**The all-new  
Nio Digital Signage  
display with  
onboard Android 11**

Big viewing experience

Beautiful picture


Even, minimal bezel

Integrated Android

Integrated software options



<b>Product Features</b>	Three USB Ports (USB 2.0 x1, USB 3.0 x1, USB-C x1) Built-in gravity sensor Bottom loudspeaker 4k Ultra HD display Even narrow bezel	DC dimming Side physical key Supports landscape and portrait mode Anti-glare panel Compatible with detachable Wireless module
<b>Display</b>	<b>Size:</b> 65" <b>Panel Type:</b> ADS <b>Response Time:</b> 8 ms <b>Aspect Ratio:</b> 16:9 <b>Display Area:</b> 1428.48(H)x803.52(V) <b>Resolution:</b> 3840(H) x 2160(V) <b>Pixel Pitch:</b> 0.372 x 0.372mm <b>Refreshing Frequency:</b> 60Hz	<b>Display Color:</b> 1.07B (10 bit) <b>NTSC:</b> 72% <b>Contrast Ratio:</b> 1200:1 <b>Viewing Angle:</b> 178° (H/V) <b>Brightness with glass (min):</b> 400 cd/m2 <b>Brightness with glass (typ):</b> 450 cd/m2 <b>Lifetime:</b> ≥ 50,000 Hours <b>Back Light Unit:</b> DLED
<b>Display OS</b>	<b>System Version:</b> Android 11 <b>CPU:</b> A55 x 4 <b>GPU:</b> Mali G52MP2	<b>RAM:</b> 4GB <b>ROM:</b> 32GB
<b>Audio</b>	<b>Sound Channel:</b> 2.0	<b>Output Power:</b> 2 x 10W
<b>Power</b>	<b>Power Requirements:</b> 100-240V~ 50/60Hz 3.5A <b>Standby Power:</b> ≤0.5W	<b>Overall Power (standard):</b> 165W <b>Overall Power (max):</b> 335W
<b>Display Connections</b>	<b>HDMI Input:</b> 3 <b>HDMI Output:</b> 1 <b>USB 2.0:</b> 1 <b>USB 3.0:</b> 1 <b>USB-C:</b> 1 (Video, Audio, PD 65W, LAN Network Sharing)	<b>Audio Output:</b> 1, 3.5mm <b>SPDIF:</b> 1 <b>RS232 Port:</b> 1 <b>RJ45:</b> 2 (IN/OUT)
<b>Physical Specifications</b>	<b>Dimension L*H*D:</b> 1463.3 x 838.3 x 76.4mm / 57.61" x 33.02" x 3.01" <b>Package Dimension L*W*H:</b> 1628 x 208 x 942mm / 64.1" x 8.19" x 37.09" <b>Net Weight:</b> 25.40 kg / 56 lbs	<b>Gross Weight:</b> 33.25 kg / 73.30 lbs <b>Machine &amp; Wall Mount Thickness:</b> 101.4mm / 3.99" <b>Wall-hanging Screw Spec:</b> M8 x 25mm <b>VESA:</b> 600 x 400mm
<b>Accessories</b>	<b>American Standard Power Cord:</b> x1 <b>HDMI Cable:</b> x1	<b>Remote Control:</b> x1
<b>Environmental Conditions</b>	<b>Operation Temperature:</b> 0°C~40°C / 32°F~104°F <b>Operation Humidity:</b> 10%~90%	<b>Storage Temperature:</b> -20°C~60°C / -4°F~140°F <b>Storage Humidity:</b> 10%~90% <b>Altitude:</b> Below 5000m / 16404.2 ft
<b>Integrated Software</b>	<b>Clear Touch Command™:</b> Remote access to the display for power saving schedules, emergency messaging and usage statistics	<b>Clear Touch Collage™:</b> Seamless screen mirror/casting to the panel from multiple devices <b>Clear Digital Sho™:</b> Web content management for digital signage
<b>Module</b>	<b>(Wireless) Compatible with:</b> CTI-WFMOD-DBAX	<b>(PC) Compatible with:</b> CTI-PCOPS-PC15SM

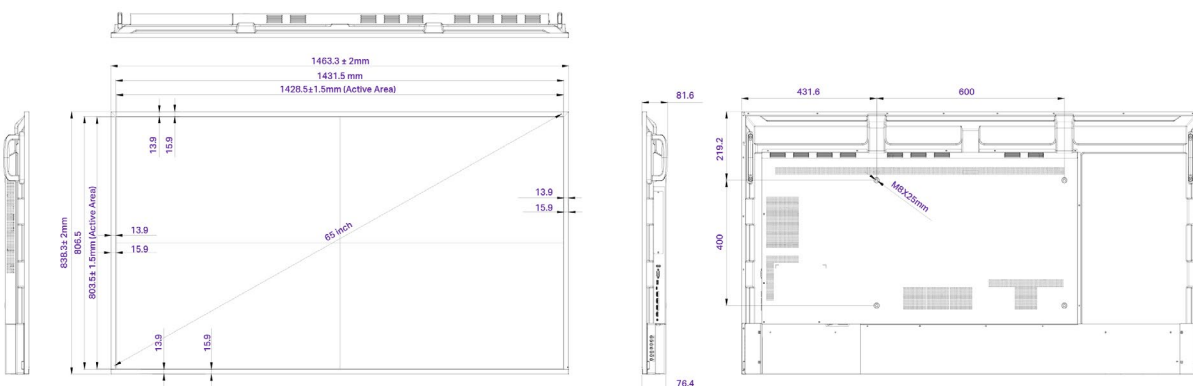

Contact a Clear Touch Sales Representative for pricing or a demo:

**864.973.7973** | [getcleardigital.com/demo](http://getcleardigital.com/demo)