

# Nio

DIGITAL SIGNAGE

**The all-new  
Nio Digital Signage  
display with  
onboard Android 11**

Big viewing experience

Beautiful picture

Even, minimal bezel

Integrated Android



Integrated software options



<b>Product Features</b>	Three USB Ports (USB 2.0 x1, USB 3.0 x1, USB-C x1) Physical buttons Built-in speaker	Hidden remote reception Supports landscape and portrait mode Anti-glare panel
<b>Display</b>	4k UI Size: 75" Panel Type: ADS Response Time: 8 ms Aspect Ratio: 16:9 Display Area: 1649.664(H) × 927.936(V) Resolution: 3840(H)×2160(V) Pixel Pitch: 0.4296mm(H) × 0.4296 mm(V) Refreshing Frequency: 60Hz Display Color: 1.07B (10 bit)	NTSC: 62% Contrast Ratio: 1200:1 Viewing Angle: 178° (H/V) Brightness with glass (min): 400 cd/m2 Brightness with glass (typ): 450 cd/m2 Lifetime: ≥ 50,000 Hours Back Light Unit: DLED High Haze: Yes, Haze 25% Operation Time: 7 Days x 16 hr
<b>Display OS</b>	System Version: Android 11 CPU: A55*4 GPU: Mali-G51MP2	RAM: 4GB ROM: 32GB
<b>Audio</b>	Sound Channel: 2.0	Output Power: 2 × 10W
<b>Power</b>	Power Requirements: 100-240V~ 50/60Hz Standby Power: ≤0.5W	Overall Power (standard): 235W Overall Power (max): 425W
<b>Display Connections</b>	HDMI Input: 3 HDMI Output: 1 USB 2.0: 1 USB 3.0: 1 USB-C: 1 (DP1.2, PD 65W, Network Sharing(100M))	Coaxial/Optical Output: Optical (SPDIF) 1 Audio Output: 1, 3.5mm RS232 Port: 1 RJ45: 2 (IN/OUT)
<b>Physical Specifications</b>	Dimension L*H*D: 1685.6 × 963.7 × 81.6 mm / 66.36" × 37.94" × 3.21" Package Dimension L*W*H: 1863×225×1090mm / 73.35" × 8.86" × 42.9" Bezel Width: 15.9mm	Net Weight: 34.7 kg / 76.5 lbs Gross Weight: 48.2 kg / 106.26 lbs Machine & Wall Mount Thickness: 101.4mm / 3.99" Wall-hanging Screw Spec: M8*25mm VESA: 800x400mm
<b>Accessories</b>	American Standard Power Cord x1	Remote Control x1
<b>Environmental Conditions</b>	Operation Temperature: 0°C~40°C / 32°F~104°F Operation Humidity: 10%~90%	Storage Temperature: -20°C~60°C / -4°F~140°F Storage Humidity: 10%~90% Altitude: Below 5000m / 16404.2 ft
<b>Integrated Software</b>	Clear Touch Command™: Remote access to the display for power saving schedules, emergency messaging and usage statistics	Clear Touch Collage™: Seamless screen mirror/casting to the panel from multiple devices Clear Digital Sho™: Web content management for digital signage

**Module** (Wireless) Compatible with: CTI-WFMOD-DBAX

(PC) Compatible with: CTI-PCOPS-PC15SM

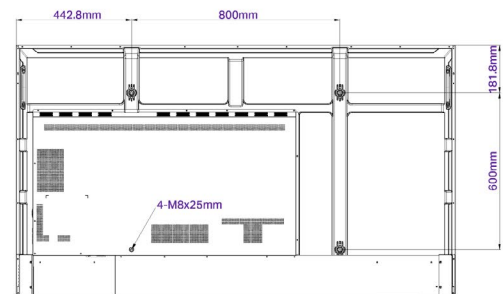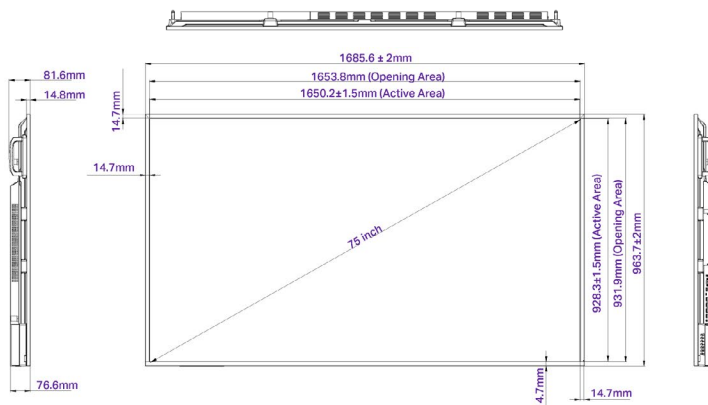

Contact a Clear Touch Sales Representative for pricing or a demo:

**864.973.7973** | [getcleardigital.com/demo](http://getcleardigital.com/demo)