



**The all-new
Nio™ Digital Signage
display with onboard
Android 11**

- 4K Ultra HD viewing
- Landscape & portrait mode
- Beautiful picture
- Even, minimal bezel
- Integrated Android OS
- Integrated software options



Product Features	Two USB 2.0 Ports	Included USB WiFi Module
	Physical key	Hidden remote reception
	Loudspeaker	Even, minimal bezel
	4K Ultra HD Display	Supports landscape and portrait mode

Display	Size: 98"	Display Color: 1.07B (10 bit)
	Panel Type: ADS	NTSC: 72%
	Response Time: 8 ms	Contrast Ratio: 1200:1
	Aspect Ratio: 16:9	Viewing Angle: 178° (H/V)
	Display Area: 2158.848mm x 1214.352mm	Brightness with glass (min): 450 cd/m ²
	Resolution: 3840(H) x 2160(V)	Brightness with glass (typ): 500 cd/m ²
	Pixel Pitch: 0.5622mm x 0.5622mm	Lifetime: ≥ 50,000 Hours
Refreshing Frequency: 60Hz	Back Light Unit: DLED	

Display Operating System	System Version: Android 11.0	RAM: 4GB
	CPU: A55 x 4	ROM: 32GB
	GPU: Mali-G52MP2	

Audio	Sound Channel: 2.0	Sound Pressure Level: 80dB
	Output Power: 2 x 10W	Peak Power: 54W

Power	Power Requirements: 100-240V ~ 50/60Hz 5.5A	Typical Power: 340W
	Standby Power: ≤0.5W	Overall Power (max): 515W

Display Connections	HDMI Input: 3	Audio Output: 1
	HDMI Output: 1	SPDIF: 1
	USB 2.0: 1	RS232 Port: 1
	USB 3.0: 1	RJ45 In: 1
	USB-C: 1	RJ45 Out: 1


Physical Specifications	Dimension L*H*D: 2212.9 x 1268.4 x 79.4mm / 87.12" x 49.94" x 3.13"	Net Weight: 69.90 kg / 154.1031 lbs
	Package Dimension L*W*H: 2360 x 280 x 1425mm / 92.91" x 11.02" x 56.10"	Gross Weight: 90.80 kg / 200.18 lbs
		Machine & Wall Mount Thickness: 100.4mm / 4"
		Wall-hanging Screw Spec: M8 x 25mm
	VESA: 800 x 600mm	

Accessories	American Standard Power Cord x1	HDMI Cable x1
	Remote Control x1	Air Mouse Controller x1

Environmental Conditions	Operation Temperature: 0°C~40°C / 32°F~104°F	Storage Temperature: -20°C~60°C / -4°F~140°F
	Operation Humidity: 10%~90% RH	Storage Humidity: 10%~90% RH
		Altitude: Below 5000m / 16404.2 ft

Integrated Software	Clear Touch Command™: Remote access to the display for power saving schedules, emergency messaging and usage statistics	Clear Touch Collage™: Seamless screen mirror/casting to the panel from multiple devices
		Clear Digital Sho™: Web content management for digital signage with paid subscription

Modules	(Wireless) Compatible with: CTI-WFMOD-DBAX	(PC) Compatible with: CTI-PCOPS-PC15SM
----------------	---	---

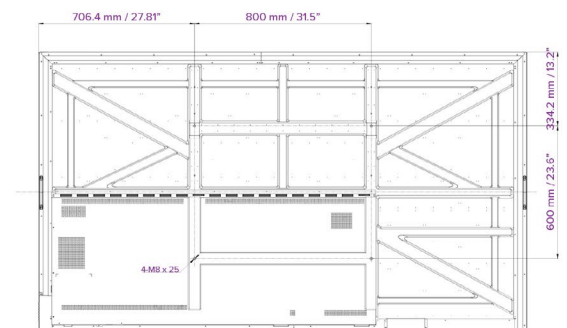

Contact a Clear Touch Sales Representative for pricing or a demo:

864.973.7973 | getcleardigital.com/demo