CMJ500R1


Lightweight Adjustable Suspended Ceiling Plate

Compact and lightweight, the Peerless CMJ500R1 Adjustable Suspended Ceiling Plate allows for easy installation of a projector anywhere on the ceiling grid. This suspended projector mount installs above a 2'x2' or 2'x4' ceiling tile and offers variable positioning for achieving the perfect projector placement. Installing the Suspended Ceiling Plate above the ceiling tiles is simplified with the Kwik-loc™ self locking cable joiner, significantly reducing total installation time. The mount features two electrical outlet box knockouts that provide a convenient option for connecting power and signal cables. This Adjustable Suspended Ceiling Plate unit is pre-assembled to speed up installation and its straightforward adjustability enhances the ease of mounting virtually any projector.

LB (KG) Max load: 60lb (27kg)


FEATURES

- Adjustable carriage allows for ideal projector positioning below a 2' x 2' or 2' x 4' standard ceiling tile
- Pre-assembled, easy to install design reduces installation time
- Knockouts are provided for electrical outlet boxes and antenna leads
- Escutcheon ring leaves a clean finish
- Compact and lightweight
- Includes Kwik-Loc™ self locking cable joiners for simple cable support set-up

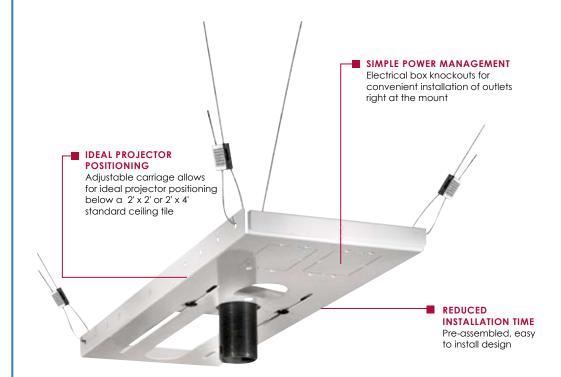







Carriage and wing nuts







WARRANTY: Limited 5-year Model Numbers

CMJ500R1

Adjustable Shelf for A/V Components


Product Specifications


	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
CMJ500R1	24.50" x 8.25" x 1.125" (622 x 209 x 28mm)	5.2lb (2.4kg)	60lb (27kg)	Powder Coat	White

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
CMJ500R1	26.25" x 13.50" x 1.875" (666 x 343 x 48mm)	7.7lb (3.5kg)	735029220626	Ceiling tray, support cables and associated hardware	1

All dimensions = inch (mm)

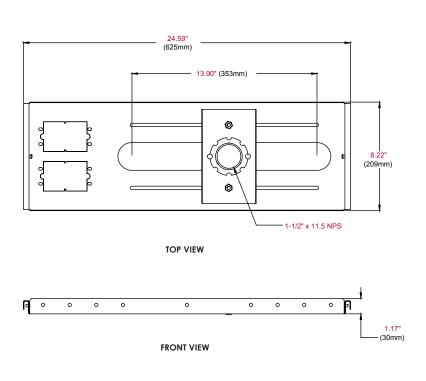

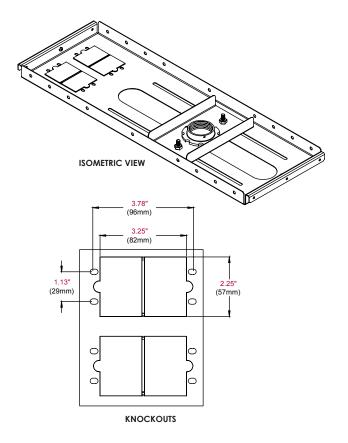

ARCHITECTS SPECIFICATIONS

The Lightweight Adjustable Suspended Ceiling Plate shall be a Peerless model CMJ500R1 and shall be located where indicated on the plans.

It shall be constructed of heavy gauge cold rolled steel and feature scratch resistant white fused epoxy finish.

Assembly and installation shall be done according to instructions provided by the manufacturer.

peerless