

THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.


- DO-IT-YOURSELF (DIY) 4mm STACKING BANANA PLUG, BUTTON ATTACHMENT (SOLDERLESS).
- SPECIFICATIONS:  
 INSULATOR BODY: POLYAMIDE (NYLON)  
 PLUG BODY: BRASS, NICKEL PLATED  
 CONTACT SPRING: BERYLLIUM COPPER ALLOY, NICKEL PLATED
- RATING:  
 IEC: <33 V AC / <70 V DC  
 VOLTAGE: 1,200 V NON-HANDHELD  
 CURRENT: 36 A MAX.  
 TEMPERATURE: -20° C TO +80° C.
- MAXIMUM WIRE SIZES:  
 CONDUCTOR:  $\varnothing$ .090 (12AWG)  
 INSULATION:  $\varnothing$ .156 (5/32")  
 STRIP LENGTH: .25 (6.4)

**MODEL NUMBER**

**CT2016-#**

- COLOR:
- 0 - BLACK
  - 2 - RED
  - 4 - YELLOW
  - 5 - GREEN
  - 6 - BLUE
  - 9 - WHITE

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
-	CLASS A RELEASED	7/11/99	
A	UPDATED FORMAT w/ CAGE CODE	4/18/04	

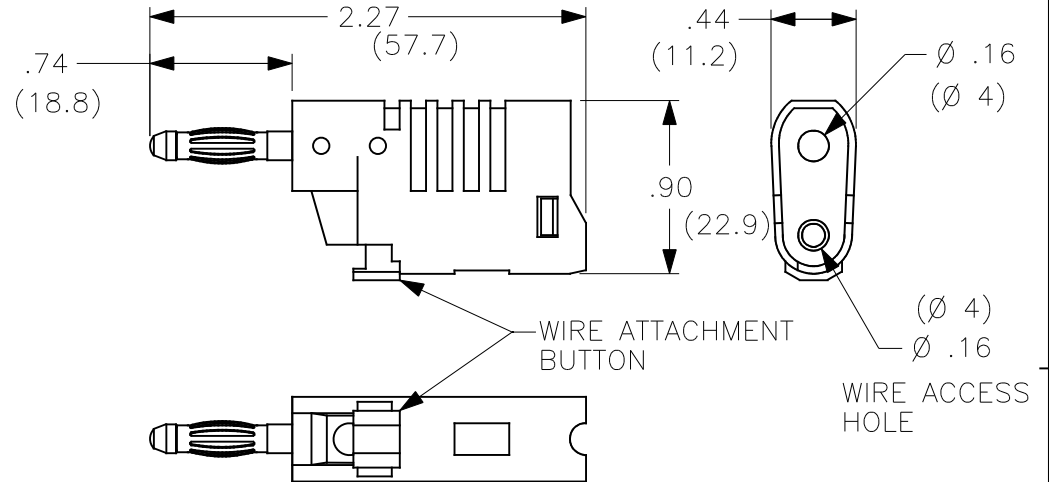

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS $\pm 1/32$ .XX $\pm .02$ .XXX $\pm .005$ DO NOT SCALE DRAWING	CONTRACT NO.		<b>Cal Test Electronics</b> 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610			
			APPROVALS	DATE	TITLE			
MATERIAL		DRAWN	WDH	7/11/99	<b>DIY 4mm STACKING PLUG,          BUTTON ATTACHMENT</b>			
FINISH		CHECKED			SIZE	CAGE CODE	DWG. NO.	REV.
NEXT ASSY		ENGR.			<b>A</b>	<b>43F45</b>	<b>P201600</b>	<b>A</b>
USED ON		DESIGN ACTIVITY			SCALE	SHEET		
APPLICATION					1:1	1 OF 1		