

THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.


- DO-IT-YOURSELF (DIY) Ø4mm STACKING SHEATH BANANA PLUG, SCREW ATTACHMENT
- SPECIFICATIONS:
 INSULATOR BODY: POLYPROPYLENE
 PLUG BODY: BRASS, NICKEL PLATED
 CONTACT SPRING: BECU, NICKEL PLATED
- RATING:
 *VOLTAGE: 1000V CAT III / 600V CAT IV P2
 REINFORCED INSULATION, CE MARK
 CURRENT: 36A MAX.
 INTERNAL RESISTANCE: <10mΩ
 TEMPERATURE: -20° TO +80° C.
- MAXIMUM WIRE SIZES:
 CONDUCTOR: Ø.090 (12AWG)
 INSULATION: Ø.16 (Ø4.0) MAX.
 STRIP LENGTH: .25 (6.4)
 * With IEC rated test lead wire.

PART NUMBER

CT2631-#

- COLOR: 0 - BLACK
 2 - RED
 4 - YELLOW
 5 - GREEN
 6 - BLUE
 9 - WHITE

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
-	CLASS A RELEASED	2/11/00	
A	CONFIGURATION CHANGE; ADDRESS	7/9/03	
B	Rating & configuration change	5/9/07	

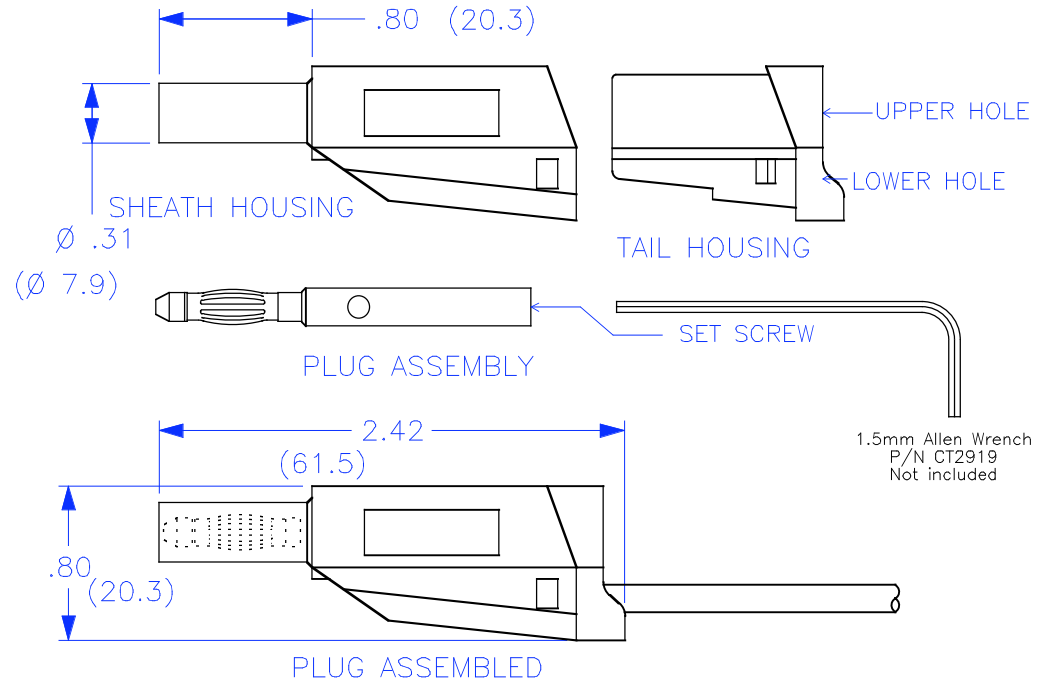

Assembly Instructions:

- Slide wire through lower hole in Tail Housing.
- Strip wire .25" (6.4mm).
- Insert stripped wire into Plug Assembly side hole and tighten Set-Screw. Set-Screw requires 1.5mm Allen Wrench (Cal Test P/N CT2919).
- Push Plug Assembly into Tail Housing upper hole and take slack out of wire.
- Snap Tail Housing assembly into Sheath Housing.

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ± 1/32 .XX ± .02 .XXX ± .005 DO NOT SCALE DRAWING	CONTRACT NO.		Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610	
			APPROVALS DATE DRAWN WDH 2/10/00 CHECKED ENGR. DESIGN ACTIVITY		TITLE DIY 4mm STACKING SHEATH PLUG, SCREW ATTACHMENT	
MATERIAL		FINISH		SIZE A	CAGE CODE 43F45	DWG. NO. P263100
NEXT ASSY	USED ON	APPLICATION		SCALE 1:1	SHEET 1 OF 1	
					REV. B	