


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
-	CLASS A RELEASED	9/7/11	
A	Updated Note 1, material was BeCu; Deleted Note 2.	2/18/15	

NOTES:

- OUTER CONDUCTOR AND BODY - BRASS, NICKEL PLATED.
CENTER CONDUCTOR - BRASS AND PHOS. BRONZE, GOLD PLATED.
DIELECTRIC - (TEF) FLUOROCARBON.
- n/a
- SPECIFICATIONS:
 FREQUENCY RANGE - DC TO 4 GHz.
 ATTENUATION ACCURACY - 0 TO 6 dB ±0.3 dB.
 7 TO 20 dB ±0.5 dB.
 21 TO 30 dB ± 0.75 dB.
 VSWR (MAX) - DC TO 4 GHz 1.25:1.
 POWER - 2 W (AVG.) @ 25° C DERATED LINEARLY TO 0.5 W @ 125° C
 250 W (PEAK) 5 μs PULSE WIDTH, 0.05% DUTY CYCLE.
 IMPEDANCE - 50 Ω ±1 Ω TYP.
 OPERATING TEMPERATURE: -65° C TO +125° C.
 TEMPERATURE COEFFICIENT: 10-4 dB/dB/°C.

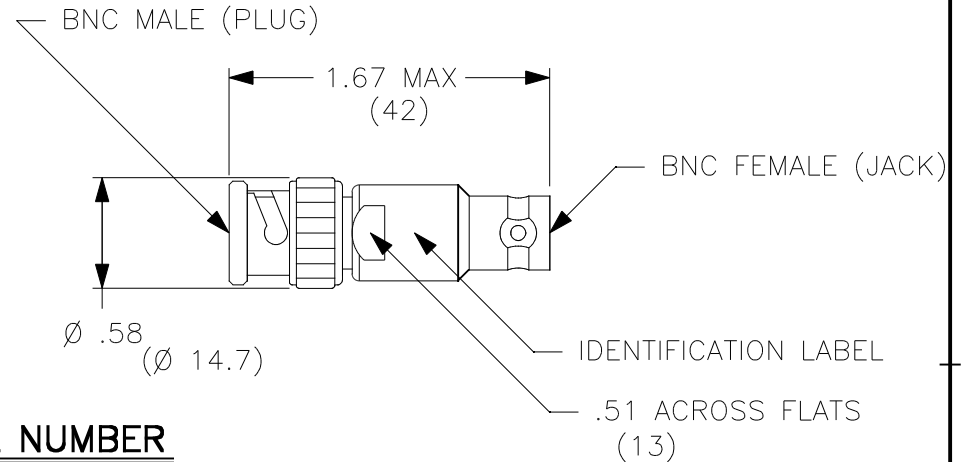

MODEL NUMBER
CT3369A-XX

- ATTENUATION (dB):
- 03 - 3 dB
 - 06 - 6 dB
 - 08 - 8 dB
 - 10 - 10 dB
 - 14 - 14 dB
 - 20 - 20 dB
 - 30 - 30 dB

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ± 1/32 .XX ± .02 .XXX ± .005 DO NOT SCALE DRAWING	CONTRACT NO.		Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610			
			APPROVALS	DATE	TITLE			
		MATERIAL	DRAWN WDH	9/7/11	ATTENUATOR, FIXED, BNC MALE TO FEMALE, 50Ω			
		FINISH	CHECKED		SIZE	CAGE CODE	DWG. NO.	REV.
NEXT ASSY	USED ON		ENGR.		A	43F45	P3369A0	A
APPLICATION			DESIGN ACTIVITY		SCALE	1:1	SHEET	1 OF 1