FEATURES

INDEPENDENT ROLL, PITCH AND YAW

For quick and precise projector registration.

MULTIPLE INSTALLATION OPTIONSMounting options include: flush mount to ceiling, use 0.5" (12.7 mm) threaded rods or use a 1-1/2" NPT threaded extension column.

QUICK CONNECT/DISCONNECT Convenient lamp and filter access on most projectors. Disconnecting maintains registration and doesn't affect pre-set adjustments.

4 CABLE MANAGEMENT
Route cables through top of mount without additional accessories.



205 Westwood Ave, Long Branch, NJ 07740 Phone: 866-94 BOARDS (26273) / (732)-222-1511 Fax: (732)-222-7088 | E-mail: sales@touchboards.com



SPECIFICATIONS

Roll	±5°
Pitch	±20°
Yaw	360°
Dimensions* (HxWxD)	3.8 x 17 x 9.3" (97 x 432 x 235 mm)
Color	Black
Weight Capacity	250 lbs (113.4 kg)

^{*} Dimensions don't include interface bracket

WHAT YOU NEED TO KNOW


ABOUT VCM

- · Industry-first microadjustable independent roll
- Three mounting methods
- Ships fully assembled with everything you need for installation in one box
- · Compatible with a wide array of accessories
- Available in universal and custom options





TECHNICAL DRAWINGS

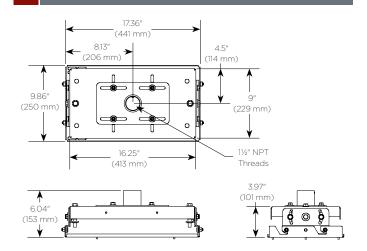

RECOMMENDED ACCESSORIES



CMA STRUCTURAL ADAPTERS



CMS EXTENSION COLUMNS



LPK1 Flush Mount Kit

For a complete list of projector mount accessories see page 21.





