



FEATURES

- 1 INDEPENDENT ROLL, PITCH AND YAW**
For quick and precise projector registration.
- 2 MULTIPLE INSTALLATION OPTIONS**
Mounting options include: flush mount to ceiling, use 0.5" (12.7 mm) threaded rods or use a 1-1/2" NPT threaded extension column.
- 3 QUICK CONNECT/DISCONNECT**
Convenient lamp and filter access on most projectors. Disconnecting maintains registration and doesn't affect pre-set adjustments.
- 4 CABLE MANAGEMENT**
Route cables through top of mount without additional accessories.



205 Westwood Ave, Long Branch, NJ 07740
 Phone: 866-94 BOARDS (26273) / (732)-222-1511
 Fax: (732)-222-7088 | E-mail: sales@touchboards.com

SPECIFICATIONS

Roll	±5°
Pitch	±20°
Yaw	360°
Dimensions* (HxWxD)	3.8 x 17 x 9.3" (97 x 432 x 235 mm)
Color	Black
Weight Capacity	250 lbs (113.4 kg)

** Dimensions don't include interface bracket*


WHAT YOU NEED TO KNOW

ABOUT VCM

- Industry-first microadjustable independent roll
- Three mounting methods
- Ships fully assembled with everything you need for installation in one box
- Compatible with a wide array of accessories
- Available in universal and custom options



TECHNICAL DRAWINGS

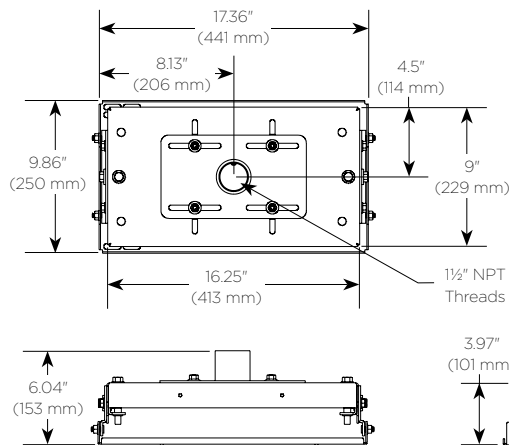

RECOMMENDED ACCESSORIES



CMA STRUCTURAL ADAPTERS



CMS EXTENSION COLUMNS



LPK1 ■ Flush Mount Kit

For a complete list of projector mount accessories see page 21.