



Light engine, optics, lamp and ballast
Air exhaust 100 CFM AT 23° C (approx.)
Keep out zone: 300 mm from rear of projector

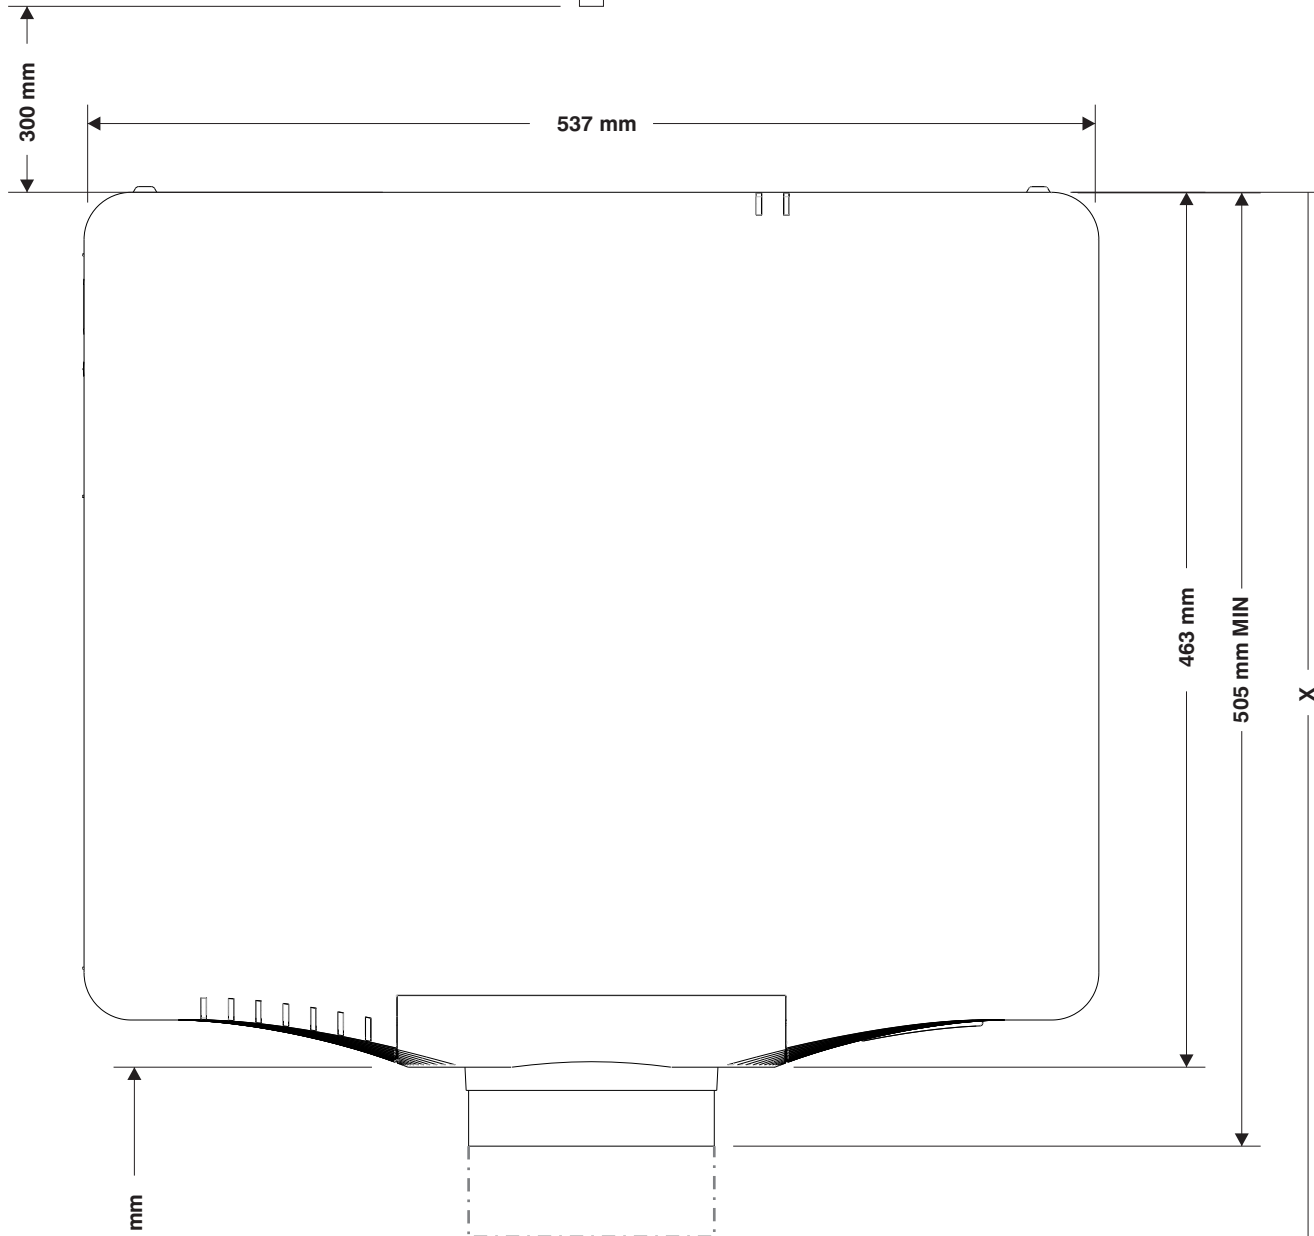

200 mm

Light engine, optics, lamp and ballast
Air intake 100 CFM AT 23° C (approx.)
Keep out zone:
200 mm from front of projector

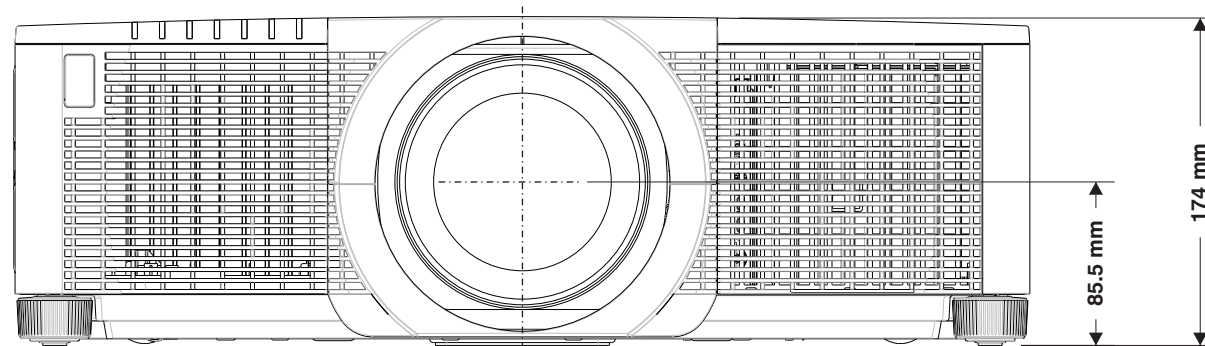

ISSUE HISTORY OF:

REV	DESCRIPTION OF CHANGE	BY	PREP DATE
01	Original Release	Phong Nguyen	02-14-2014

Ultra short throw zoom lens
121-118101-01 USL-901CH
X = 542mm

Short throw zoom lens
121-119102-01 SL-902CH
X = 522 mm

Standard throw zoom lens
121-120104-01 SD-903W CH
121-121105-01 SD-903X CH
X = 505 mm

Middle throw zoom lens
121-122106-01 ML-904CH
X = 542 mm

Long throw zoom lens
121-123107-01 LL-905CH
X = 553 mm

Ultra long throw zoom lens
121-124108-01 UL-906CH
X = 542 mm



809 WELLINGTON STREET NORTH
KITCHENER, ONTARIO, CANADA
N2G 4Y7

PART DESCRIPTION		DWG Line Q Series	
SIZE B	PART NUMBER 020-000717-01	REVISION 01	
SCALE NTS	MASS LBS [KG]	SHEET 1 OF 1	
PROPRIETARY		Copyright ©2013 Christie Digital Systems USA, Inc. All rights reserved. Not to be disclosed or reproduced in any manner without the express written permission of Christie.	