


Nio

DIGITAL SIGNAGE

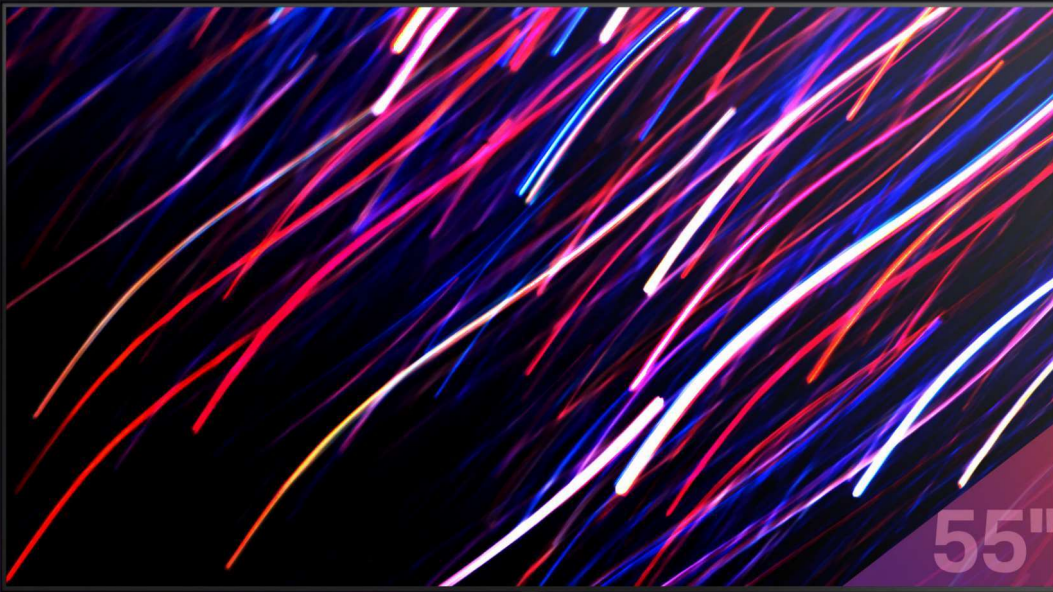

The all-new
Nio Digital Signage
display with
onboard Android 8.0

Big viewing experience

Beautiful picture

Even, minimal bezel


Integrated Android

Integrated software options



Product Features	Two USB 2.0 Ports Physical key Loudspeaker 4k UI Compatible with installing NUC module	Hidden remote reception Even bezel Supports landscape and portrait mode Anti-glare panel
Display	Size: 55" Panel Type: VA Response Time: 6.5 ms Aspect Ratio: 16:9 Display Area: 1209.6mm x 680.4mm Resolution: 3840(H) x 2160(V) Pixel Pitch: 0.315mm x 0.315mm Refreshing Frequency: 60Hz	Display Color: 1.07B (10 bit) NTSC: 72% Contrast Ratio: 4000:1 Viewing Angle: 178° (H/V) Brightness with glass (min): 400 cd/m2 Brightness with glass (typ): 450 cd/m2 Lifetime: ≥ 30,000 Hours Back Light Unit: DLED
Display Operating System	System Version: Android 8.0 CPU: A73 x 2+A53 x 2 GPU: Mali-G51MP2	RAM: 3GB ROM: 16GB
Audio	Sound Channel: 2.0	Output Power: 2 x 8W
Power	Power Requirements: 100-240V ~ 50/60Hz 2.0A Standby Power: ≤0.5W	Overall Power (max): 200W
Display Connections	HDMI Input: 2 HDMI Output: 1 USB 2.0: 2 VGA Input: 1	Audio Input: 1 Audio Output: 1 SPDIF: 1 RS232 Port: 1 RJ45 In: 1
Physical Specifications	Dimension L*H*D: 1233 x 704 x 71mm / 48.54" x 27.71" x 2.79" Package Dimension L*W*H: 1353 x 156 x 821mm / 56.26" x 6.14" x 32.32"	Net Weight: 13.75 kg / 30.31 lbs Gross Weight: 18.00 kg / 39.68 lbs Machine & Wall Mount Thickness: 95mm / 3.74" Wall-hanging Screw Spec: M6 x 12mm VESA: 400 x 200mm
Accessories	American Standard Power Cord x1	Remote Control x1
Environmental Conditions	Operation Temperature: 0°C~40°C / 32°F~104°F Operation Humidity: 10%~90%	Storage Temperature: -20°C~60°C / -4°F~140°F Storage Humidity: 10%~90% Altitude: Below 5000m / 16404.2 ft
Integrated Software	Clear Touch Command™: Remote access to the display for power saving schedules, emergency messaging and usage statistics	Clear Touch Collage™: Seamless screen mirror/casting to the panel from multiple devices Clear Digital Sho™: Web content management for digital signage

Module
(Packaged Separately) **Wireless Module:** USB WiFi Dongle: 8822BU

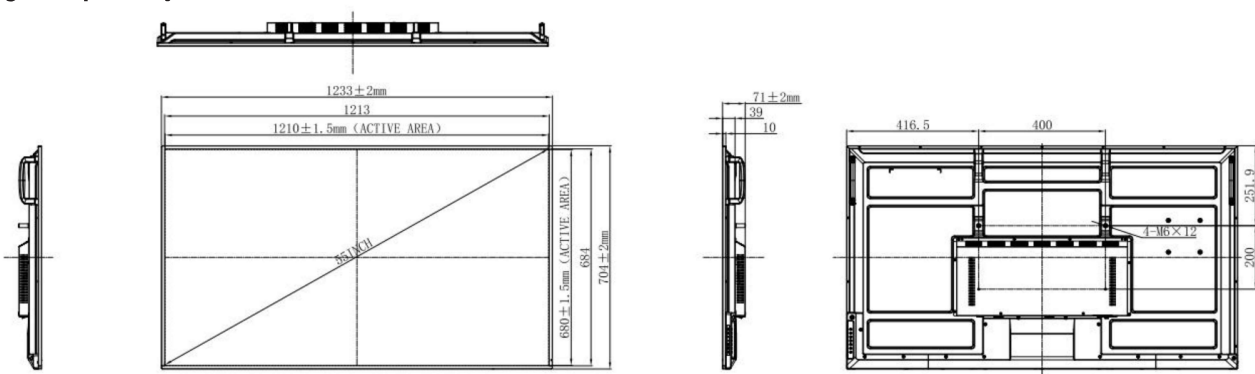

Contact a Clear Touch Sales Representative for pricing or a demo
864.973.7973 | getcleardigital.com/demo