


| Order Code                                | Description                          |
|---|--------------------------------------|
| <input checked="" type="checkbox"/> DPMA1 | PosiTector Standard with DPM A Probe |
| <input type="checkbox"/> DPMA3            | PosiTector Advanced with DPM A Probe |

| PosiTector® <i>DPM</i><br>Dew Point Meter  | Compare PosiTector Gage Bodies |   |
|--|--------------------------------|---|
| Features   | Standard                       | Advanced                                |
| Auto Log mode runs unattended on batteries for up to 50 hours or continuously via USB  | ●                              |   |
| Enhanced Auto Log mode turns the gage off between readings for up to 8 months of battery life. Each reading can be uploaded to PosiSoft.net or an FTP server using WiFi. Automatically group readings into batches at daily, weekly, or monthly intervals. |                                | ●                                       |
| User defined limits for all parameters—visible and audible warnings. Send email alerts when connected to WiFi.   |                                | ●                                       |
| Two year warranty on body AND probe  | ●                              | ●                                       |
| Reading Storage Capacity   | 2500 datasets per probe        | 100,000 datasets in up to 1,000 batches |
| Onscreen Batch Annotation — Add notes, change batch names and more with built-in QWERTY keyboard   |                                | ●                                       |
| Store thickness, profile, environmental and wall thickness measurements in individual batches  |                                | ●                                       |
| Wet bulb temperature can be displayed and recorded   |                                | ●                                       |
| Trend Charts graph readings in real-time   |                                | ●                                       |
| Connection Options   |                                |   |
| Sealed USB port for fast, simple connection to a PC and to supply continuous power. USB cable included.  | ●                              | ●                                       |
| <b>Bluetooth 4.0 technology</b> for data transfer to a mobile device running the PosiTector App or optional portable printer. <b>BLE API</b> available for integration into third-party software.  |                                | ●                                       |
| WiFi technology wirelessly synchronizes with PosiSoft.net and downloads software updates   |                                | ●                                       |



PosiTector DPMA1



Hot Wire

| Removeable Integral Probe with Wind Speed Sensor | Probe Model DPM A                               |                     |
|--|---|---------------------|
|  |   | Surface Temperature |
|  | Air Temperature                                 | ✓                   |
|  | Wet Bulb Temperature*                           | -                   |
|  | Relative Temperature                            | ✓                   |
|  | Dew Point Temperature                           | ✓                   |
|  | Surface Temperature minus Dew Point Temperature | ✓                   |
|  | Wind Speed                                      | ✓                   |

\*Wet Bulb Temperature displayed/recorded on PosiTector Advanced (3) models only

**DPM A Probe includes:**

- Ambient temperature, surface temperature, and humidity sensors from PosiTector *DPM* Integral Probe plus a hot wire anemometer
- Choice of wind speed measurement units — m/s, km/h, mph, ft/s, ft/m, knots
- Auto-rotating display for inverted use

# DeFelsko® Inspection Instruments

## All Gages Feature...

### Simple

- All readings are constantly updated and displayed simultaneously
- No need to consult complex tables or use a slide rule calculator
- Alarms indicate when climate conditions are unsuitable for painting
- RESET feature instantly restores factory settings

### Durable

- Solvent, acid, oil, water and dust resistant — weatherproof
- Shock-absorbing, protective rubber holster with belt clip
- Two year warranty on gage body AND probe

### Accurate

- Fast response precision sensors provide accurate, repeatable readings
- SmartTrend™ Indicators identify rising, falling or stable readings
- Certificate of Calibration included showing traceability to NIST (Long Form)
- Conforms to national and international standards including ISO and ASTM

### Versatile

- High Contrast LCD with backlit display
- Auto Log mode records environmental parameters at user selected time intervals
- Celsius/Fahrenheit switchable
- Selectable display languages
- Flip display enables right-side-up viewing
- Uses alkaline or rechargeable batteries (built-in charger)

| Order Code                                | Description                          |
|---|--------------------------------------|
| <input checked="" type="checkbox"/> DPMA1 | PosiTector Standard with DPM A Probe |
| <input type="checkbox"/> DPMA3            | PosiTector Advanced with DPM A Probe |

### Powerful

- Hold function freezes the display allowing measurements to be manually recorded
- Screen Capture — save screen images for record keeping and review
- Sealed USB port for fast, simple connection to a PC and to supply continuous power. USB cable included.
- Software updates via web keep your gage current
- Every stored measurement is date and time stamped
- Software Solutions for viewing, analyzing & reporting data. See page 3 for a complete overview of these options.

| Specifications      | Range          | Accuracy        | Resolution |
|---------------------|----------------|-----------------|------------|
| Surface Temperature | -40° to 80° C  | ± 0.5° C        | 0.1° C     |
|                     | 80° to 190° C  | ± 1.5° C        |            |
|                     | -40° to 175° F | ± 1° F          | 0.1° F     |
|                     | 175° to 375° F | ± 3° F          |            |
| Air Temperature     | -40° to 80° C  | ± 0.5° C        | 0.1° C     |
|                     | -40° to 175° F | ± 1° F          | 0.1° F     |
| Humidity            | 0 to 100%      | ± 3%            | 0.1%       |
| Wind Speed          | 0 to 20 m/s    | ± 3% Full Scale | 0.1 m/s    |
|                     | 0 to 44 mph    |                 | 0.1 mph    |
| Dew Point           | -60° to 80° C  | ± 3° C*         | 0.1° C     |
|                     | -76° to 175° F | ± 5.4° F*       | 0.1° F     |

\*Dependent on RH. See [www.defelsko.com/TdAccuracy](http://www.defelsko.com/TdAccuracy) for more information.



#### Award Winning Compatibility!

PosiTector body accepts all PosiTector 6000, 200, RTR, SPG, DPM, SST, SHD and UTG probes easily converting from a coating thickness gage to a surface profile gage, dew point meter, soluble salt tester, Shore hardness durometer or ultrasonic wall thickness gage.



**Comes complete** with PosiTector gage body, DPM A probe, environmental sensors, protective rubber holster with belt clip, wrist strap, 3 AAA batteries, instructions, nylon carrying case with shoulder strap (DPM/DPMA/DPMD), hard shell carrying case (DPMS), protective lens shield, Long Form Certificate of Calibration traceable to NIST, USB cable, two (2) year warranty

**SIZE:** 159 x 31 x 31 mm (6.25" x 2.4" x 1.2")

**BODY WEIGHT:** 150 g (5.3 oz.) without batteries

**CONFORMS TO:** ISO 8502-4, BS 7079-B4, ASTM D3276, IMO PSPC, SSPC-PA7 and US Navy NSI 009-32.

©DeFelsko Corporation USA 2017. All Rights Reserved. Technical Data subject to change without notice. • PDPM.v.LW/W1712

**DeFelsko®**  
Inspection Instruments

DeFelsko Corporation 800 Proctor Ave., Ogdensburg, New York 13669-2205 USA  
Toll Free 1-800-448-3835 • Tel: +1-315-393-4450 • Fax: +1-315-393-8471  
techsale@defelsko.com • www.defelsko.com

  
Made in U.S.A.

# PosiSoft® Suite of Software

Four FREE and unique ways to view and report your PosiTector and PosiTest data

## PosiSoft Desktop — PC/Mac

Powerful desktop software for downloading, viewing, printing and storing measurement data. No internet connection required.

- Import readings directly from the gage via USB or from legacy PosiSoft desktop versions
- Synchronize measurement data including readings, notes and pictures to and from PosiSoft.net
- Import/Export Templates and Jobs to share with other users
- **NEW** Import PDF forms and overlay **Custom Fields** for automatic population of inspection and measurement data
- Report preview automatically refreshes as changes are made



## PosiSoft.net — Web-based

A web-based application offering secure centralized management of readings. Access your data from any web-connected device.

- Synchronize data when connected via USB or WiFi
- Synchronize measurement data including readings, notes and pictures with PosiSoft Desktop and PosiTector App
- Securely store measurement data in the cloud and share with authorized users via a secure login



Jobs Batches Readings

## PosiTector App — Mobile

Mobile app connects PosiTector Advanced instruments, the PosiTector SmartLink and the PosiTest AT-A to your *iOS* or *Android* smart device.


- Auto pairing Bluetooth BLE connection
- Automatically generate user-formatted reports and share via email, text, cloud storage services like Dropbox, and more
- Export readings to PosiSoft Desktop or synchronize readings to and from PosiSoft.net for further reporting and archival options



## PosiSoft Custom PDF Report Generator

Easily create reports from your measurement data in seconds.

featured on  
PosiSoft Desktop  
PosiSoft.net  
PosiTector App

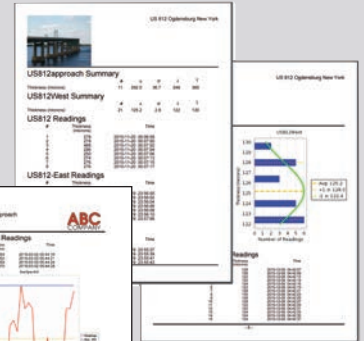

- Include inspection information such as on-site pictures, screen captures, notes and more to communicate important details
- Create and save multiple custom layouts as templates – insert cover pages, add logos/images, and select font and point size
- Select the information to include for each product type – charts, histograms, readings, time stamps and more
- Compile multi-batch reports from one or more probes and instrument types
- Export readings as comma separated value (.CSV) files which can easily be imported into Excel and other supporting applications



**Jobs** feature consolidates batches into groups to keep measurement data organized and to quickly create multi-batch reports (not available on PosiTector App)

## PosiSoft USB Drive — Gage Based



A simple gage interface to retrieve data in a manner similar to USB flash drives, cameras, or digital audio players. No software to install or internet connection required.

- View and print readings and graphs using universal PC/Mac web browsers and file explorers
- Measurement data can be printed quickly from a formatted HTML report or exported in .CSV format for further analysis in spreadsheets
- Simple file management - Copy and paste measurement data from the PosiTector to a local folder on your computer, network folder or cloud drive
- Access stored screen captures (snapshots) of the PosiTector display