


Temperature Monitoring


Simple Temperature Recording

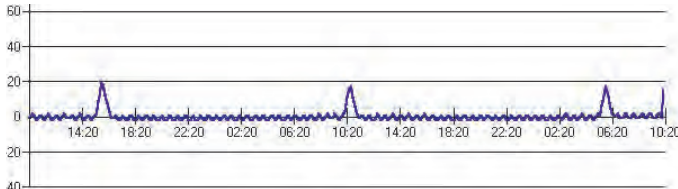

Warehouse Storage & Distribution, Processing Plant & Cold Storage, Transportation & Retail
Continual monitoring will indicate whether equipment is functioning properly. Inconsistencies in temperature patterns help to identify when equipment maintenance is required.

The JR-1000 - Another data-logging solution from ACR Systems.

- Peace of mind is priceless
- Prove temperature readings

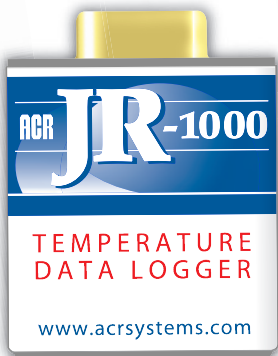

Connection:



9 Pin Serial



USB
with adapter



JR-1000

Product Specifications

Type: Single-Channel Temperature Thermistor

GENERAL SPECIFICATIONS

Size: 33 mm x 43 mm x 20 mm (1.3" x 1.7" x 0.75")
Weight: 35 grams (1.23 ounces)
Case Material: Polyurethane
Battery: 3.6 volt Lithium, 0.45 Amp-Hour
Resolution: 8-bit (1 part in 256)
Mounting: Magnetic backing
Clock Accuracy: +/- 2 seconds per day
Sampling Methods: First-in First-out, Stop When Full (*option to delay start, spot or average samples*)
Operating Limits: -40 to 85°C (-40 to 185°F) and 0 to 95% RH (non-condensing)
PC Requirements: IBM PC or 100% compatible with at least one free serial port, 2 MB RAM, and 10 MB hard drive disk space
Software Requirements: TrendReader® Express (*compatible with Windows® 3.1, 95, 98, Me, 2000, NT and XP*)

Memory Size: 32 KB (*capable of storing up to 244,800 readings when data compression is selected*)
Sampling Rates: User selectable rates from 8 seconds to 34 minutes (*readings stored to memory can be spot or averaged over the sample interval, except for the 8-second interval*)
Number of Channels: One (*one internal channel for ambient temperature*)

SENSOR SPECIFICATIONS

Temperature Sensor:
Type: NTC Thermistor - 10,000 ohms @ 25°C (77°F)
Range: -40 to 85°C (-40 to 185°F)
Accuracy: +/- 0.2°C over the range of 0 to 70°C (+/- 0.3°F over the range of 32 to 158°F)
Resolution: 0.4°C (0.7°F) @ 25°C; better than 1°C (1.8°F) between -25 and 70°C (-13° and 158°F); better than 2.0°C (3.6°F) between -40 and -25°C (-40°F and -13°F)

The JR-1000 is the easiest to use temperature data logger available. With its precision calibrated internal temperature sensor, simply place the logger in the field and leave it to record. Once the desired information has been recorded, plug the logger into the serial port of your computer and begin downloading and viewing the logged data with ACR's rudimentary TrendReader® Express software or feature filled TrendReader® 2 software.



WARRANTY

Internal Battery: 5 Years
Data Logger: 3 Years

APPLICATIONS

Food process verification, pharmaceutical storage, laboratories, transportation of temperature sensitive goods, equipment run time, HVAC system testing and balancing, etc

Model#: JR-1000
Cat#: 01-0192