




Agilent 34405A Digital Multimeter

the feature-rich DMM with unbeatable values

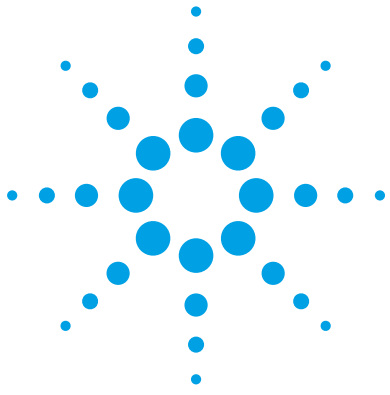

Agilent Technologies

True Capability and Reliability

Affordable yet feature rich, the Agilent 34405A 5.5 digit digital multimeter comes with true capability and reliability for your demanding test and measurement applications.


The 34405A is designed beyond meeting general industrial needs, covering voltage, current, resistance, frequency, diode test and continuity measurements. Its true value is more evident in its capability to 'stretch' temperature and capacitance measurements for better coverage over broader applications. Not only that, you can perform more efficient and accurate measurements with its built-in math functions.

With the 34405A, your measurements are made fast, easy and more convenient. Perform quick setup and remote control with the USB 2.0 (TMC-488.2 compliant) interface. Take two readings simultaneously from the same signal for better visibility and troubleshooting, leading to high throughput and productivity. Connect the 34405A to your PC, for 'unlimited' storage to capture intermittent signals and more flexibility in measurement configuration and data manipulation. You can also store/recall complete instrument setups to further save test time.

Designed to stringent quality controls and backed by a leading service and support team, the 34405A is your ideal instrument that's truly capable and reliable across a broad range of industries—be it R&D, design and validation, manufacturing or education.

Features

- 120,000 counts resolution
- 16 built-in measurement functions, including temperature and capacitance
- 6 built-in math functions: Null, dBm, dB, MinMax, Limit and Hold
- Up to 70 readings per second
- 0.025% DC voltage accuracy
- USB 2.0 interface (TMC-488.2 compliant)
- SCPI compatible
- Comes with Agilent IO Library Suite, DMM Intuilink connectivity software, and IVI-COM and LabVIEW⁽¹⁾ drivers

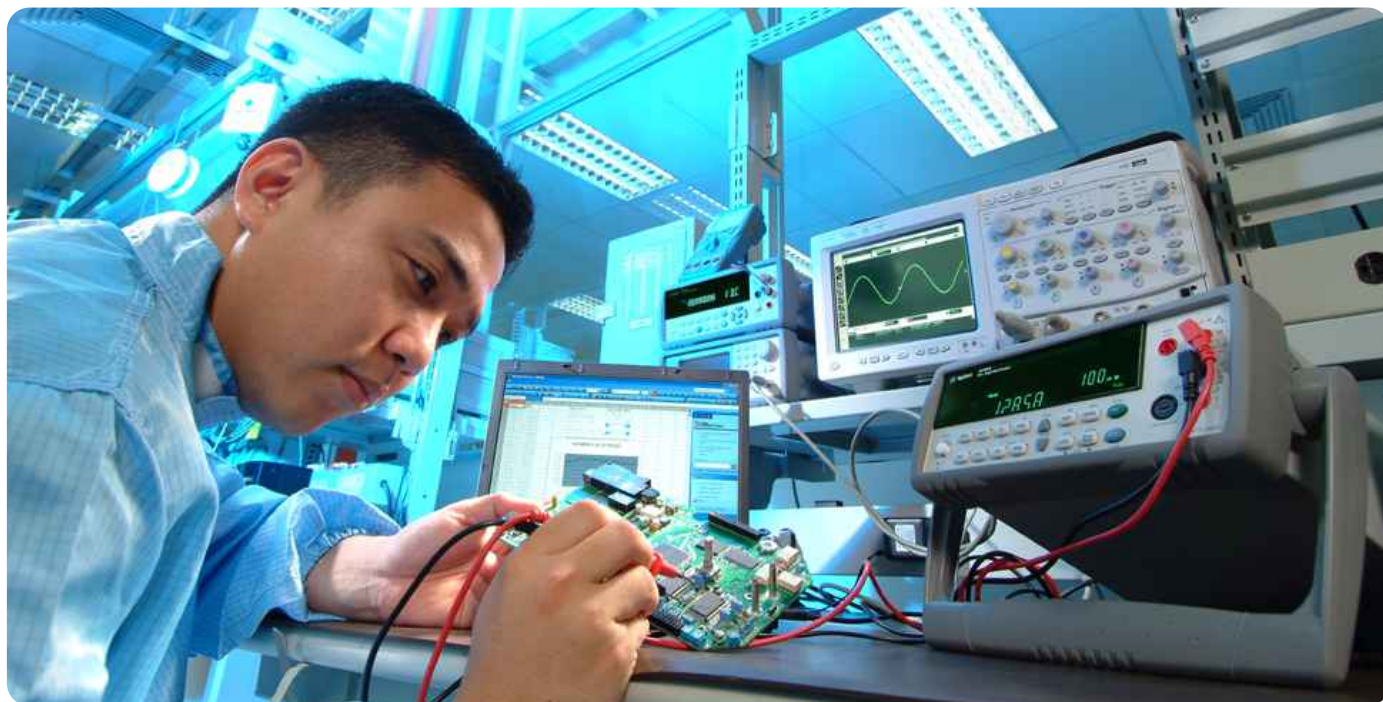

More Features, Uncompromised Quality

Use the Up-Down keys to select the desired measurement range. Just press Shift ▶ Auto key to switch measurement range automatically.

5.5 digit dual display increases productivity and throughput in troubleshooting.

Connect the supplied test loads to the input terminals to start your measurements.



Superior value with a broad range of functions, including temperature and capacitance measurements.

Select secondary display measurements.

Math functions and utility menu that allow users to take reference measurements (ie. Min/Max value, etc.) and store measurement setups from the front panel.

Ideal for Your Applications

Designed for educators

The 34405A is designed with today's educators in mind. It is programmable with LabVIEW[®], making it easy for integration into your existing system. It is not only affordable, but also built for robustness that insures your investment over the years to come.



34405A's robust build and easy integration into existing systems make it ideal for today's research and teaching lab environments.

“Real capabilities don't come with a big price tag”




Works well in manufacturing environments

The 34405A is a perfect fit for the robust manufacturing industry as it is small, rack-mountable and rugged with its shock-absorbing bumpers. It is remote-controllable with industry-standard SCPI commands so you can conveniently configure your measurements from a distance. Save setup and configuration time of your instrument with USB connectivity. With its dual display feature, take two readings simultaneously from the same signal. Not only that, get accurate measurements (up to 70 readings per second) so you can make timely decisions for your high volume.



Make quick and accurate measurements without instrument setup or configuration hassle

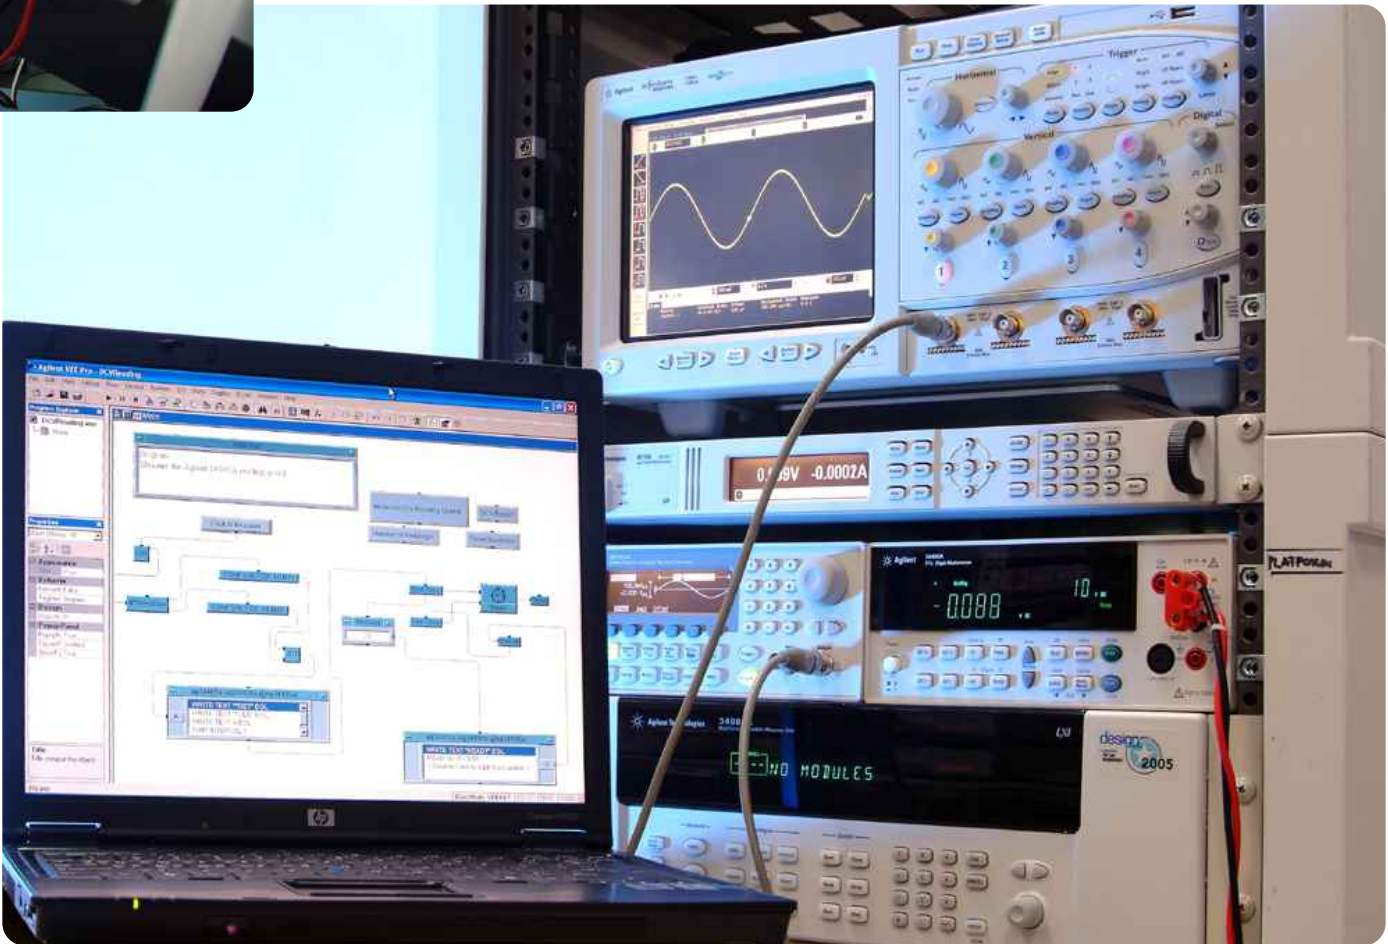

Ideal for Your Applications



Quick connect to PC with built-in USB 2.0 interface

The 34405A's built-in USB 2.0 interface enables quick and easy connection to the PC with its USB interface, which is auto-detectable by the bundled award-winning Agilent IO Library Suite. Hence, you can save unnecessary setup time and perform your tests sooner. Its PC-connect capability allows you to remotely control the instrument with industry-standard SCPI commands.



USB 2.0 interface makes the 34405A hot-swappable and auto-detectable, saving setup and configuration time.



An advocate of Agilent Open, the 34405A opens up to flexibility and customer convenience via system-ready instrumentation.

Flexibility to work seamlessly with most software environments

The 34405A is a member of the Agilent Open, providing flexibility for seamless integration into a test system. For easy integration with different programming environments, the 34405A is shipped with the Agilent IO Library Suite, LabVIEW[®] driver and IVI-COM driver.




Ideal for Your Applications

Data logging setup in minutes with bundled Intuilink

The 34405A is the only instrument in its class that comes with an easy-to-use software—the ideal complement to customer's measurement needs. The DMM Intuilink connectivity software is able to connect to the 34405A and data log directly from it through the USB port. Intuilink also gives users the flexibility to configure tests and export data for detailed analysis.

Set the interval or duration for your measurement

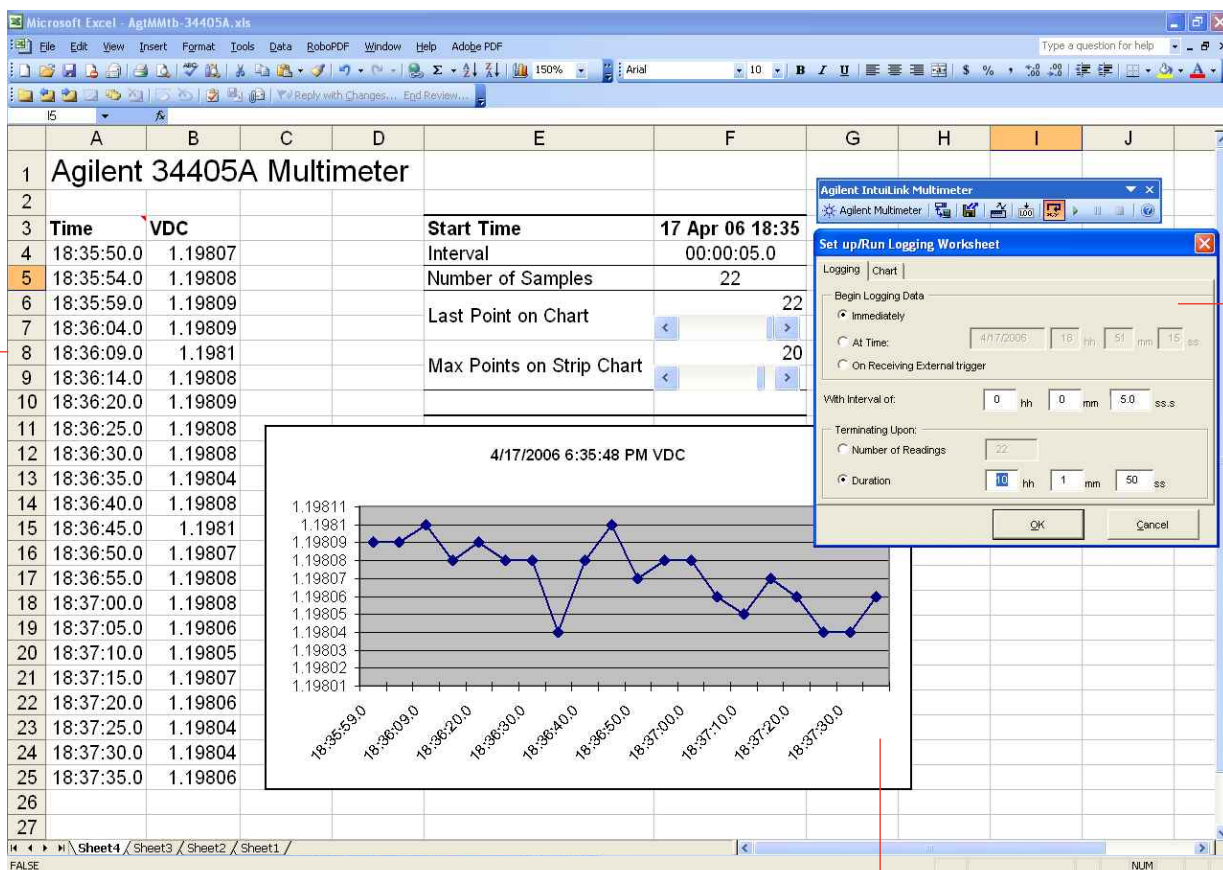

Trend plot helps you analyze your results

View your measurements easily in table format



The step-by-step guide on using Intuilink with the 34405A is available at www.agilent.com/find/34405A in the FAQ section. It answers the question, "How can I start using the software provided for data logging with the 34405A multimeter?"

Specifications^[2]

Display	VFD
Resolution	5.5 digits
Operating specifications	
DCV, DCI	70 readings/s
ACV, ACI	2.5 readings/s
Frequency	9 readings/s
DC specifications	
DCV	
Range	100 mV – 1000 V
Accuracy	0.025%
DCI	
Range	10 mA – 10 A
Accuracy	0.05%
Resistance	
Range	100 Ω – 100 M Ω
Accuracy	0.05%
Continuity / Diode test	Yes
AC specifications	
True RMS ACV	
Range	100 mV – 750 V
Accuracy	0.2%
True RMS ACI	
Range	10 mA – 10 A
Accuracy	0.5%
Frequency	
Range	1 MHz
Accuracy	0.02%

Temperature measurement range	– 80 °C to 150 °C
Capacitance measurement range	1 nF – 10,000 μ F
Math functions	
Null	Yes
Hold	Yes
Min/Max/Average	Yes
dB/dBm	Yes
Limit test	Yes
Remote control	
Interface	USB 2.0 (TMC-488.2)
Programming language	SCPI, IEEE-488.1, IEEE-488.2
Software	Intuilink, Agilent IO Library Suite
Drivers	LabVIEW ^[1] , IVI-COM
General	
Weight	3.75 kg
Size	103.8 mm x 261.1 mm x 303.2 mm
Safety	Certified by CSA for IEC/EN/CSA/UL 61010-1 2nd Edition CAT I 1000 V, CAT II 300 V
Warranty	One year

Standard Shipped Components

- Test lead kit
- Power cord
- Quick Start Guide
- Product Reference CD-ROM
- Test report
- USB interface cable
- User's and Service Guide
- Agilent IO Library Suite CD-ROM

Optional Accessories



34132A Deluxe Test Lead Kits



34133A Precision Electronics Test Leads



E2308A Thermistor Probe



34330A 30A Current Shunt





Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you receive your new Agilent equipment, we can help verify that it works properly and help with initial product operation.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and onsite education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements. Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management. For more information on repair and calibration services, go to www.agilent.com/find/removealldoubt

Contact Us

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

United States:

(tel) 800 829 4444
(fax) 800 829 4433

Canada:

(tel) 877 894 4414
(fax) 800 746 4866

China:

(tel) 800 810 0189
(fax) 800 820 2816

Europe:

(tel) 31 20 547 2111

Japan:

(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:

(tel) (080) 769 0800
(fax) (080) 769 0900

Latin America:

(tel) (305) 269 7500

Taiwan:

(tel) 0800 047 866
(fax) 0800 286 331

Other Asia Pacific Countries:

(tel) (65) 6375 8100
(fax) (65) 6755 0042
(email)
tm_ap@agilent.com



www.agilent.com/find/34405A



www.agilent.com/find/quotation
Select your instrument and click a button. A formal quotation will be delivered to your email address in 2 minutes.



www.agilent.com/find/34405A_demo



www.agilent.com/find/34405A
View the datasheet (Publication number: 5989-4906EN).

Product specifications and appearance in this document are subject to change without notice. [1] LabVIEW is a registered trademark of National Instruments Corporation. [2] At 0 °C to 50 °C unless otherwise specified. © Agilent Technologies, Inc. 2006



Agilent Technologies