

## Product Datasheet

# AVerVision® CP155

## Interactive Visualizer

### Real Clear

- High quality 3.2-megapixel CMOS camera sensor
- Display clear image with HD 720p output resolution
- Magnify details with powerful 16X total zoom
- Sharpen image with Auto Focus and Auto-Image buttons
- All-new versatile AVer+ software



### Product Specifications & Features

Image / Video	
Image Sensor	1/2" CMOS Color Image Sensor
Total Pixels	3.2M Pixels
Output Resolution	HD 720p (1280 x 720)
Lens	F 3.0; fl = 9.6mm
Zoom	16X Total Zoom (2X AVerZoom™ + 8X Digital Zoom)
Frame Rate	24fps (Max.)
Focus	Auto / Manual
Shooting Area	330 x 248mm (Max.)
Functions	
Image Rotation	Camera Head 0° / 90° / -90°
Internal Storage	Built-in Memory (Max: 80; up to 3M each)
On-Screen Display (OSD)	Provided
Image Effects	Color / B&W / Negative / Mirror / Reverse / Freeze
Image Adjust. (White Balance / Exposure / Night View)	Auto / Manual
AVerPresenter	Provided (AVerBox & AVerVisor)
Split Screen	Provided (Vertical & Horizontal)
Picture-in-Picture	Provided
Display Mode	Text / Graphics / High Frame
Capture Mode	Single / Continuous
User Profiles	Up to 3
Timer	Provided
Flicker Filter Control	Provided (2 Levels)
Remote Control	Provided


Patent No.: Japan 3122844, Taiwan 1276904

© 2009 AVerMedia INFORMATION, Inc.

All rights reserved. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, transmitted in any form, or translated into any language by any means (electronically, mechanically, photocopied, recorded, etc.) without the prior written permission of AVerMedia. Information in this document is subject to change without notice. The information contained herein is for informational purposes only and shall not be considered legally binding. "AVerVision" and "AVer" are trademarks (or registered trademarks) of AVerMedia Information, Inc. Other trademarks used herein for description purposes only belong to each of their respective companies. Version 1.2

## Product Datasheet

Connectivity	
DVI-I Output	Provided
RGB Input	Provided (15-Pins D-Sub, Pass Through)
RGB Output	Provided (15-Pins D-Sub, Pass Through)
S-Video & Composite Video Output	Provided (NTSC or PAL)
USB 2.0 Port	Provided (PC Camera / Built-in Image Download)
Lighting	
Light Source	Embedded LED Lamp
Others	
Dimension	Operating: 480mm x 180mm x 504mm Folded: 340mm x 230mm x 61mm
Net Weight	2.4kg (5.29lbs)
Power Consumption	20W (Max.)
Certifications	FCC, CE
Package Content	
AVerVision® CP155 Unit	Remote Control with Batteries
AVer+ Software CD	User Manual CD
Power Adapter	Quick Guide
RGB Cable	Warranty Card
USB Cable	Anti-Glare Sheet
Panel	

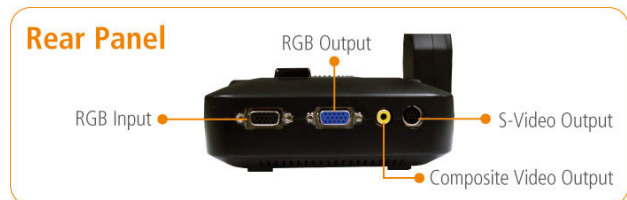

Patent No.: Japan 3122844, Taiwan 1276904

© 2009 AVerMedia INFORMATION, Inc.

All rights reserved. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, transmitted in any form, or translated into any language by any means (electronically, mechanically, photocopied, recorded, etc.) without the prior written permission of AVerMedia. Information in this document is subject to change without notice. The information contained herein is for informational purposes only and shall not be considered legally binding. "AVerVision" and "AVer" are trademarks (or registered trademarks) of AVerMedia Information, Inc. Other trademarks used herein for description purposes only belong to each of their respective companies. Version 1.2

## Product Datasheet

### Optional Accessories



Carrying Bag



Security Bracket



Microscope Adapter



Light Box

## All-New AVer+ Software

AVer+ software offers a brand new user interface that allows you to draw and make notes on top of images, record video and audio, set up a multiple-user network, and much more.

### System Requirements

#### For PC

Windows XP

- Intel Pentium III 1 GHz or later x86 processor (Intel Core 2 Duo 1.66GHz recommended)
- 512 MB of RAM (1 GB recommended)
- 100 MB free hard disk space for basic installation (without content in Gallery)


Windows Vista

- Intel Core Duo 1.5 GHz or later x86 processor (Intel Core 2 Duo 1.66GHz recommended)
- 1 GB of RAM (2 GB recommended)
- 100 MB free hard disk space for basic installation (without content in Gallery)

#### For Mac

Mac OS X 10.4 and later

- 1GHz G4 processor or Intel Core Duo 1.83 GHz or later x86 processor (Intel Core 2 Duo 2.0 GHz recommended)
- 1 GB of RAM (2 GB recommended)
- 100 MB free hard disk space for basic installation (without content in Gallery)

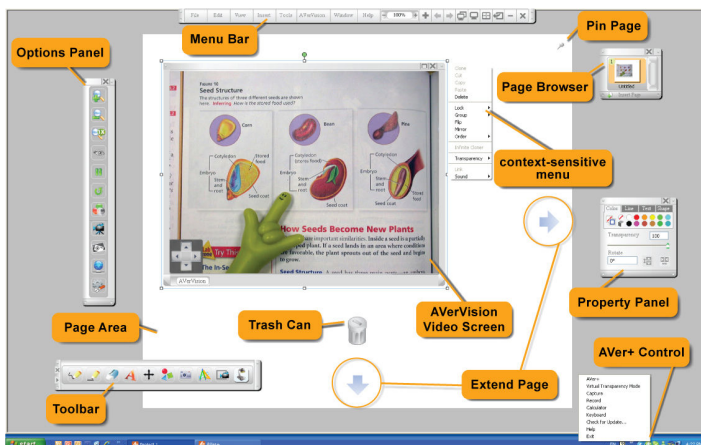

**Touchboards**  
 205 Westwood Ave, Long Branch, NJ 07740  
 Phone: 866-94 BOARDS (26273) / (732)-222-1511  
 Fax: (732)-222-7088 | E-mail: sales@touchboards.com

Mac Universal Designed for Microsoft Windows XP CERTIFIED FOR Windows Vista

Patent No.: Japan 3122844, Taiwan 1276904

© 2009 AVerMedia INFORMATION, Inc.

All rights reserved. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, transmitted in any form, or translated into any language by any means (electronically, mechanically, photocopied, recorded, etc.) without the prior written permission of AVerMedia. Information in this document is subject to change without notice. The information contained herein is for informational purposes only and shall not be considered legally binding. "AVerVision" and "AVer" are trademarks (or registered trademarks) of AVerMedia Information, Inc. Other trademarks used herein for description purposes only belong to each of their respective companies. Version 1.2