

BenQ

MW811ST


Digital Projector



HIGHLIGHTS

- Microphone in with two 10W Speakers
- USB Reader
- USB Display (Plug-n-Play)
- LAN Display
- 4-1 Display
- Remote Desktop
- Wireless Display (Optional)
- Filter Free Design
- Virtually No Color Decay
- Crestron RoomView Compatible
- PJ-Link Compatible
- 2500 ANSI Lumens
- WXGA Native Resolution
- BrilliantColor™
- 3D Color Management
- VIDI™
- Auto Keystone (Vertical)
- Keystone ± 30 Degree
- 6 Segment Color Wheel
- Variable Audio Out
- Closed Captioning

Projection System	DLP® technology by Texas Instruments®		
Native Resolution	WXGA (1280 x 800)		
Brightness	2500 ANSI lumens		
Contrast Ratio	4600:1 (Full on/Full off)		
Keystone	Auto Keystone / Manual Vertical ±30°		
Aspect Ratio	16:10 Native (5 aspect ratio Selectable)		
Color	Full 1.07 billion color palette		
Lens	F=2.6		
Zoom Ratio	Fixed		
Image Size (Diagonal)	48" to 300"		
Throw Ratio	0.5 (95"@1M)		
Lamp	210W, 4000/5000 hours (Normal/Economic mode)		
Computer Compatibility	VGA(640 x 480) to UXGA(1600 x 1200)		
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p		
Video Compatibility	NTSC, PAL, SECAM		
Horizontal Frequency	31-99 kHz		
Vertical Scan Rate	48-120 Hz		
Input Terminals	PC	Analog RGB: D-sub 15 pin x 2(Shared with Component) LAN Networking: RJ-45 x1 (LAN Display) USB Type A x1 (USB Reader), Type Mini-B x1 (USB Display)	
	A/V	S-Video: Mini Din 4 pin x 1 Composite Video: RCA x 1 Microphone: Stereo Mini Jack x1 Audio L/R : RCA x 2 Stereo Mini Jack x 1	
		Output Terminals	PC Monitor out: D-sub 15 pin x 1 Audio Variable Audio Out : Stereo Mini Jack x 1 Speaker: 10W x 2 DC 12V Trigger
		Control Terminal	Serial Connector : RS232 9 pin x 1 RJ45 x 1 (LAN Control) USB Type Mini-B x1 (Page up/down)
		Dimensions(W x H x D)	11.4 x 5.03 x 9.9 inch (290 x 128 x 252 mm) with Lens
Weight	7.5 lbs (3.4kg)		
Power Supply	AC 100 to 240 V, 50/60 Hz		
Power Consumption	Typical 290W, Standby < 1W		
Audible Noise	32/27 dB (Normal/Economic mode)		
On-Screen Display Languages	Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (26 Languages)		
Picture Modes	Dynamic Mode	Presentation Mode	
	sRGB Mode	Cinema Mode	
Functions	User 1 Mode	User 2 Mode	
	BrilliantColor™	Blank	
	VIDI™	Panel Key Lock	
	3D Color Management	Auto Off	
	Crestron LAN Control	Security Password	
	Closed Captioning	HDTV compatible	
	Digital Zoom (x2)	High Altitude Mode	
	Variable Audio Out	"Q?" Hot Key for FAQ	
	Quick Cooling	3D Ready	
	Quick Auto Search	Freeze	
	PJLink Compatible	Teaching Template	
	Accessories (Standard)	Quick Start Guide	VGA Cable
	Manual CD	Power Cord	
Accessories (Optional)	Remote Control w/battery		
	Presentation Plus	Spare Lamp Kit	
	Wall Mount	Wireless Dongle	
	RS232 Cable	Carry Case	

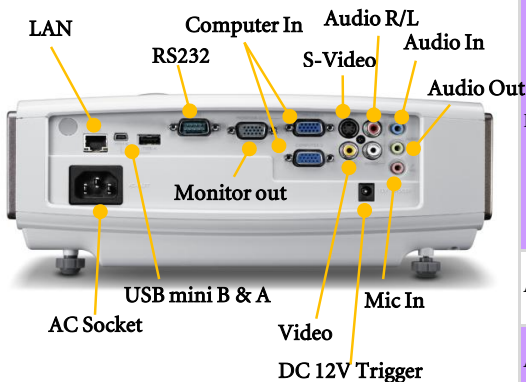

Touchboards

205 Westwood Ave, Long Branch, NJ 07740
 Phone: 866-94 BOARDS (26273) / (732)-222-1511
 Fax: (732)-222-7088 | E-mail: sales@touchboards.com