

BenQ

MX810ST


Digital Projector



HIGHLIGHTS

- Microphone in with two 10W Speakers
- USB Reader
- USB Display (Plug-n-Play)
- LAN Display
- 4-1 Display
- Remote Desktop
- Wireless Display (Optional)
- Filter Free Design
- Virtually No Color Decay
- Crestron RoomView Compatible
- PJ-Link Compatible
- 2500 ANSI Lumens
- XGA Native Resolution
- BrilliantColor™
- 3D Color Management
- VIDI™
- Auto Keystone (Vertical)
- Keystone ± 30 Degree
- 6 Segment Color Wheel
- Variable Audio Out
- Closed Captioning

Projection System	DLP® technology by Texas Instruments®	
Native Resolution	XGA (1024 x 768)	
Brightness	2500 ANSI lumens	
Contrast Ratio	4600:1 (Full on/Full off)	
Keystone	Auto Keystone / Manual Vertical ±30°	
Aspect Ratio	4:3 Native (5 aspect ratio Selectable)	
Color	Full 1.07 billion color palette	
Lens	F=2.6	
Zoom Ratio	Fixed	
Image Size (Diagonal)	41" to 300"	
Throw Ratio	0.61:1 (81"@1M)	
Lamp	210W, 3500/5000 hours (Normal/Economic mode)	
Computer Compatibility	VGA(640 x 480) to UXGA(1600 x 1200)	
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p	
Video Compatibility	NTSC, PAL, SECAM	
Horizontal Frequency	31-99 kHz	
Vertical Scan Rate	48-120 Hz	
Input Terminals	PC	Analog RGB: D-sub 15 pin x 2 (Shared with Component) LAN Networking: RJ-45 x1 (LAN Display) USB Type A x1 (USB Reader), Type Mini-B x1 (USB Display)
	A/V	S-Video: Mini Din 4 pin x 1 Composite Video: RCA x 1 Microphone: Stereo Mini Jack x1 Audio L/R : RCA x 2 Stereo Mini Jack x 1
Output Terminals	PC	Monitor out: D-sub 15 pin x 1
	Audio	Variable Audio Out : Stereo Mini Jack x 1 Speaker: 10W x 2 DC 12V Trigger
Control Terminal	Serial Connector : RS232 9 pin x 1 RJ45 x 1 (LAN Control) USB Type Mini-B x1 (Page up/down)	
Dimensions(W x H x D)	11.4 x 5.03 x 9.9 inch (290 x 128 x 252 mm) with Lens	
Weight	7.5 lbs (3.4kg)	
Power Supply	AC 100 to 240 V, 50/60 Hz	
Power Consumption	Typical 296W, Standby < 1W	
Audible Noise	32/27 dB (Normal/Economic mode)	
On-Screen Display Languages	Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (26 Languages)	
Picture Modes	Dynamic Mode	Presentation Mode
	sRGB Mode	Cinema Mode
Functions	User 1 Mode	User 2 Mode
	BrilliantColor™	Blank
Accessories (Standard)	VIDI™	Panel Key Lock
	3D Color Management	Auto Off
Accessories (Optional)	Crestron LAN Control	Security Password
	Closed Captioning	HDTV compatible
Accessories (Optional)	Digital Zoom (x2)	High Altitude Mode
	Variable Audio Out	"Q?" Hot Key for FAQ
Accessories (Optional)	Quick Cooling	3D Ready
	Quick Auto Search	Freeze
Accessories (Optional)	PJLink Compatible	Teaching Template
	Quick Start Guide	VGA Cable
Accessories (Optional)	Manual CD	Power Cord
	Remote Control w/battery	
Accessories (Optional)	Presentation Plus	Spare Lamp Kit
	Wall Mount	Wireless Dongle
Accessories (Optional)	RS232 Cable	Carry Case

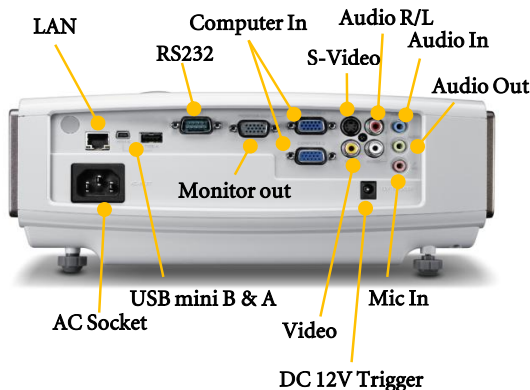

205 Westwood Ave, Long Branch, NJ 07740
 Phone: 866-94 BOARDS (26273) / (732)-222-1511
 Fax: (732)-222-7088 | E-mail: sales@touchboards.com

