
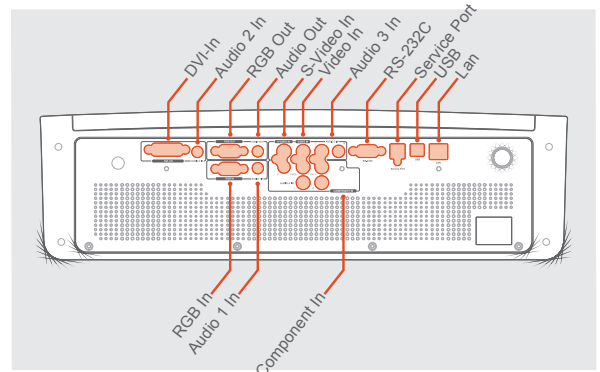


Model	MPWX70E
Technology	.74" 3LCD 
Brightness	4200 Lumens (standard) 3200 Lumens (economy)
Native Resolution	1280 x 800 (WXGA)
Supported Resolution	1900 x 1200 (UXGA)
Brightness Uniformity	85%<
Projection Methods	Tabletop front/rear; Ceiling front/rear
Colors	16.7 Million
Contrast Ratio	600:1
Aspect Ratio	Native 16:10; Compatible 4:3, 16:9
Image Size	40 in to 300 in / 1.02 m to 7.62 m
Projection Distance	4 ft to 30 ft / 1.22 m to 9.4 m
Throw Ratio	1.45 ~ 1.73 (manual zoom and focus)
Keystone Correction	Vertical +/- 30 degrees
Horizontal Scan Rate	35 ~ 107kHz
Vertical Scan Rate	50 ~ 120Hz
Audio Output	1 x 8W mono speaker
Lamp	275W
Lamp Life	2000 (standard) / 3000 (economy)
Remote Control	Multi-function IR remote with laser pointer
Noise Level	33dB standard / 30dB economy mode
Power Supply	AC Input 100-240V, Auto 50/60Hz
Power Consumption	430W <1W in standby mode
Computer Compatibility	UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA resized; VESA standards; PC and Macintosh compatible
Video Compatibility	EDTV (480p), HDTV (720p, 1080i), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM
Connectivity	Component (RCA x3) DVI-I, VGA-in, composite video, S-video, RCA stereo audio-In (x2), mini-jack audio-In (x2), VGA-out, mini-jack audio-out, USB for mouse control
Service and Network Control	RS232X, RJ45
Weight	16.5 lbs / 5.03 kg
Dimensions (W x H x D)	18.9 in x 14.2 in x 5.7 in / 48.0 cm x 36.1 cm x 14.5 cm
Standard Accessories	AC power cord, VGA cable, USB cable, remote control with batteries, user manual (CD)
Optional Accessories	Replacement remote control, harsh environment filter, component video cable, DVI-D cable, ceiling mount, S-video cable, carrying case




## Key Features

- Five auto features (Auto search, Auto sync, Auto ceiling, Auto keystone and Auto filter alert)
- 4200 Lumens
- Robust input panel
- Optional harsh environment filter
- RJ45 network ready
- Side changing lamp and filter
- Closed caption



Throw Distance (ft)

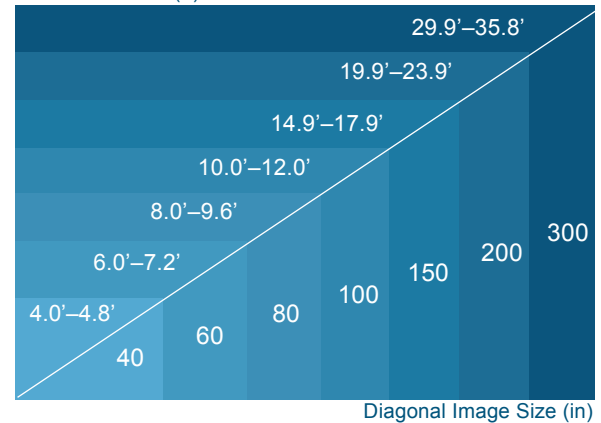

Note: allow 3-5% variance on all projector throw ratios

## Award Winning Technical Support 24/7/365

And, of course, all BOXLIGHT products come with free lifetime technical support. Speak with a hands-on, in-house, ISF Certified® technician ready to service your projector should the need arise.

© 2012 BOXLIGHT, Inc. Specifications subject to change without notice. Helps meet ADA Section 508 compliance BOXLIGHT NE 151 Highway 300, Suite A PO Box 2609 Belfair, WA 98528

