

THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.


REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
—	CLASS A RELEASED	7/12/99	


1. SAFETY JACK w/.188 FASTON TERMINAL.
2. SPECIFICATIONS:
INSULATOR: POLYACETAL
CONTACT: BRASS, NICKEL PLATED
LOCKING NUT: BRASS, NICKEL PLATED
3. RATING:
VOLTAGE: 1000V CATIII P2 (IEC1010-1)
CURRENT: 36A MAX.
RESISTANCE: <5mΩ.
TEMPERATURE: -20° C TO +80° C.
4. MOUNTING HOLE: REF. DIAGRAM
5. INSULATOR THREAD, M12 X 0.75
6. MAXIMUM PANEL THICKNESS: .40 (10.2).

PART NUMBER

CT2910-#

COLOR: 0 — BLACK
1 — BROWN
2 — RED
3 — ORANGE
4 — YELLOW
5 — GREEN
6 — BLUE
7 — PURPLE
8 — GRAY
9 — WHITE

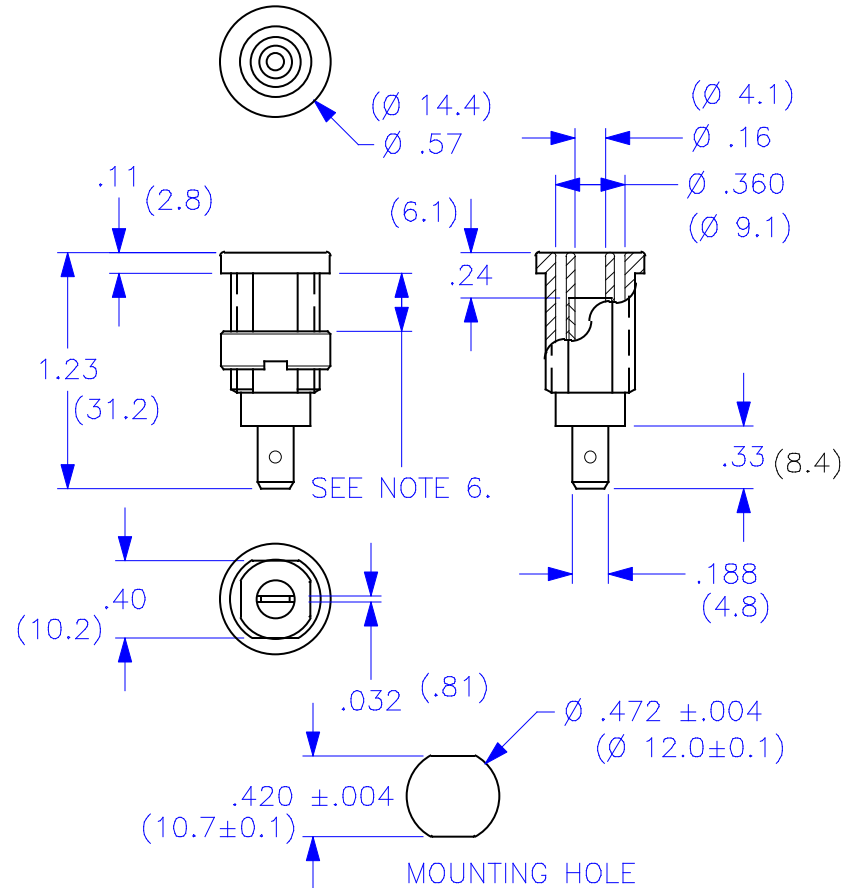

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ± 1/32 .XX ± .02 .XXX ± .005 DO NOT SCALE DRAWING	CONTRACT NO.		Cal Test Electronics				22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610	
			APPROVALS		DATE		TITLE 4mm SAFETY JACK, w/.188 FASTON TERMINAL			
			DRAWN WDH		7/12/99					
			CHECKED							
			ENGR.							
MATERIAL		DESIGN ACTIVITY				SIZE A	CAGE CODE	DWG. NO. P291000	REV. —	
FINISH										
NEXT ASSY		USED ON								
APPLICATION						SCALE 1:1		SHEET 1 OF 1		