




# EIP-2600

## XGA DLP® Projector 2600 ANSI Lumens

### KEY FEATURES: Model EIP-2600

- 2600 ANSI Lumens, 80% uniformity, and 2200:1 contrast ratio.
- True XGA resolution. SXGA+ through VGA and MAC compatible.
- Smart data compression / expansion, and video scaling.
- DVI-I input supports digital data, plus digital video w/HDCP.
- Accepts Composite, S, and Component Video, both 4:3 and 16:9.
- Compatible with HD input resolution up to 1080i.
- Convenient manual zoom (1.15X) and focus lens.
- Built-in image offset. Vertical digital keystone correction.
- Power Management and Eco mode help prolong lamp life.
- Selectable menu position and timeout. Auto input selection.
- Wireless remote control. Carrying case included.
- 3 Year\* Projector Warranty!

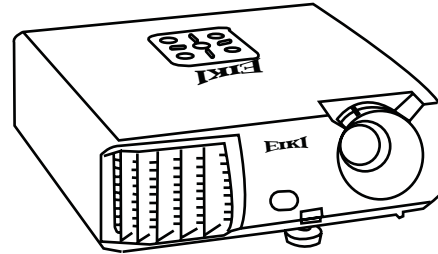

EIP-2600

**Included Accessories:** Quick Set-up Guide. Owner's Manual on CD. AC Power Cord. Lens Cover. VGA type Computer Input Cable (Dsub15~Dsub15). Component Video Input Cable (Dsub15~3-RCA). RS-232 Control Adapter (DIN~Dsub9). Wireless Remote Control & Batteries (AA x 2).

**Optional Accessories:** Replacement Lamp. Mouse Cable (USB-A ~ USB-B). Ceiling Mount. Ceiling Post and Plate.

### SPECIFICATIONS: Model EIP-2600

|   |  |   |  |
|---|--|---|--|
| Screen Brightness .....                           | up to 2600 ANSI Lumens                               | Video: Formats Supported.....                       | Normal 4:3 and Wide Screen 16:9                      |
| Illumination Uniformity .....                     | 80%  | Video: Image Sizing.....                            | Video Scaling Technology                             |
| Size of Color Palette .....                       | 16.7 Million   | Signal Inputs:                                      |  |
| Contrast Ratio .....                              | 2200:1   | Digital Computer / Component w/HDCP.....            | DVI-I x 1  |
| Projection Lamp .....                             | 230 Watt UHP   | Analog Computer/Component (w/optional adapter)..... | HD15 x 1   |
| Estimated Lamp Life .....                         | up to 4000 Hours of Use                              | S Video.....  | S-Video x 1  |
| Imaging System.....                               | 0.55" in. DDR DLP® x 1                               | Composite video .....                               | RCA x 1  |
| Screen Pixels .....                               | 1024x768 in stripe configuration                     | Audio Input .....                                   | RCA x 2  |
| Total Pixels .....                                | 786,432 ((1024x768) x 1)                             | Audio Input.....                                    | Ministereore x 1                                     |
| Lens Type .....                                   | Manual Zoom and Focus                                | Signal Outputs:                                     |  |
| Lens Specs.....                                   | Speed: f:2.5~2.6; FL: 0.803~0.925in. (20.4~23.5 mm)  | Computer / Component.....                           | HD15 x 1   |
| Lens Ratio .....                                  | Zoom Max:Min: 1.15:1; Throw:Width: 1.64~1.97:1       | Audio output.....                                   | Ministereore x 1                                     |
| Image Diagonal .....                              | 40~300 in. (101.6~762 cm)                            | Sound System - Amplifier .....                      | 2 Watt (Mono)  |
| Image Width .....                                 | 2.6~20 ft. (0.79~6.1m.)                              | Sound System - Speakers .....                       | 1.1 in. ( 2.8 cm) x1                                 |
| Throw Distance (tele ~ wide) .....                | 4.92 ~ 36.7 ft. (1.5~11.2 m.)                        | Fan Noise .....                                     | as low as 29 dBA                                     |
| Front Elevation .....                             | up to 8° up  | Cabinet Size (HxWxD).....                           | 3.5 x 10.6 x 10.4 in. (89 x 270 x 265 mm.)           |
| Anti Keystone .....                               | Image starts 15.5% of image height above lens center | Weight .....  | 6.4 lbs. (2.9kg)                                     |
| Vertical Keystone Correction .....                | Digital: up to 80° up or down                        | Packaged Size (H x W x D)....                       | 10.0 x 14.8 x 15.0in (255 x 375 x 382 mm)            |
| Scanning Frequency .....                          | Auto: H Sync. 31-79kHz; V Sync. 50-85Hz              | Packaged Weight .....                               | 13.2 lb. (6.0 Kg)                                    |
| Dot Clock .....                                   | 108 MHz  | Power Requirements .....                            | 100-240V AC, 50/60Hz                                 |
| Image Orientation .....                           | Normal, Reversed, Inverted                           | Power Consumption .....                             | up to 303 W  |
| Local Control / Power Management .....            | Full Function / Auto Shut-Off                        | Heat.....   | up to 1140 BTU (287 KC)                              |
| Remote Control w/Mouse .....                      | Wireless (Infra Red) x 1                             | Power Cord.....                                     | 6' (1.8 M) Type 3, Detachable                        |
| RS-232 Control Port .....                         | Mini DIN-9 x 1                                       | Electrical Safety Compliance .....                  | UL / cUL   |
| Mouse (Page Up/Down) & Firmware Update Port ..... | USB Type B x 1                                       | Electromagnetic Compatibility .....                 | FCC Class B, CE Mark                                 |
| TRIGGER terminal .....                            | DC 12V output  | Security Facilities.....                            | Kensington® Security Slot                            |
| Computer Native Resolution .....                  | 1024x768 (XGA)                                       | Operating Temperature.....                          | 41~95°F (5~35°C)                                     |
| Computer: Compatibility .....                     | SXGA+, SXGA, XGA, SVGA, VGA & MAC                    | User Maintenance .....                              | Replace Lamp   |
| Computer: Formats.....                            | 1400 x 1050 through 640x480                          | UPC .....   | 4571194671629  |
| Computer: Higher Resolutions .....                | Displayed panned or Smart Compressed                 | Warranty (to the original end-use customer)         |  |
| Video: Compatibility .....                        | NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N             | Projector: .....                                    | 3 Yr. / 6000 Hr. *(Parts & Labor to Correct Defects) |
| Video: HD Compatibility .....                     | 480i/p, 540p, 576i/p, 720p, 1035i, 1080i             | Lamp: .....   | .90 Days (Failed Lamp Replaced Pro-Rata)             |
| Computer: Lower Resolution .....                  | Displayed normal or Smart Expanded                   |   | * Whichever occurs first                             |
| Video Compatibility.....                          | NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N             |   |  |
| Video HD Compatibility.....                       | 480i/p, 540p, 576i/p, 720p, 1035i, 1080i             |   |  |

**Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.**