

**EPSON**<sup>®</sup>  
EXCEED YOUR VISION

**Touchboards**

205 Westwood Ave, Long Branch, NJ 07740  
Phone: 866-94 BOARDS (26273) / (732)-222-1511  
Fax: (732)-222-7088 | E-mail: sales@touchboards.com



## PowerLite<sup>®</sup> 1940W, 1950 and 1960 MULTIMEDIA PROJECTORS



PowerLite 1940W shown

### Bright solutions for smaller venues.

Keep presentations shining bright, even in ambient light, with the PowerLite 1940W, 1950 and 1960. Designed for corporate, education and house of worship use, this family of bright, feature-packed solutions projects vibrant images in virtually any setting. These sleek projectors can be easily carried between meeting rooms and classrooms or can be installed in small- to medium-size venues. Need widescreen, larger-than-life images? Select the PowerLite 1940W with WXGA resolution. Award-winning Faroudja DCDi<sup>®</sup> technology, featured on all these models, reduces noise and enhances sharpness, creating smooth video images. And, Split Screen<sup>1</sup> enables you to conveniently display content from two different sources simultaneously. This family of PowerLite projectors truly is a bright solution for your presentation needs.

**Bright, brilliant picture with 3LCD, 3-chip technology** — 4200 lumens color/white light output<sup>2</sup>, WXGA widescreen resolution (1940W), 4500 lumens color/white light output<sup>2</sup>, XGA resolution (1950) and 5000 lumens color/white light output<sup>2</sup>, XGA resolution (1960)

**Advanced connectivity** — DisplayPort, HDMI, VGA, Composite, USB

**Feature-rich** — Split Screen<sup>1</sup>, Multi-PC display, PC-free presentation with PDF viewer, automatic vertical image correction, easy-slide horizontal keystone correction, DICOM Simulation Mode<sup>3</sup> and more



# PowerLite® 1940W/1950/1960 MULTIMEDIA PROJECTORS

## The best-selling projectors in the world.

Epson offers a wide range of high-quality projectors to meet most any need. Built with image quality and reliability in mind, EPSON® projectors enhance communication and inspire collaboration, while offering a low total cost of ownership. From ultraportable projectors designed for educational settings to boardroom-ready installable business projectors, Epson has the model made for you.




## Brilliant Image Quality

### 3LCD technology — for quality and color that's beyond amazing


Innovative technology with proven reliability

- 3 chips for full-time, vibrant color
- 25% less electricity required per lumen of brightness when compared to 1-chip DLP projectors<sup>4</sup>
- Over 20 years of road-tested reliability built into every projector

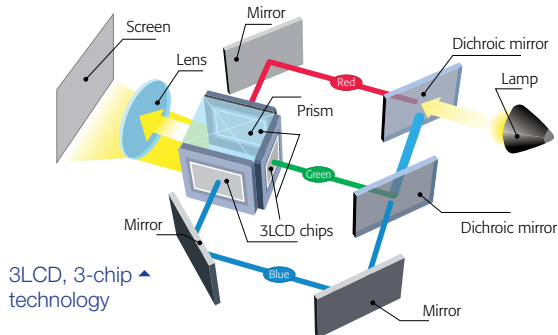

### Amazing color and white light output

The PowerLite 1900 Series delivers true-to-life, vibrant, colorful images, even in ambient light. For today's color-rich, multimedia content, users want a projector that delivers both optimum white and color imagery. That is why the industry has developed a new metric called Color Light Output.

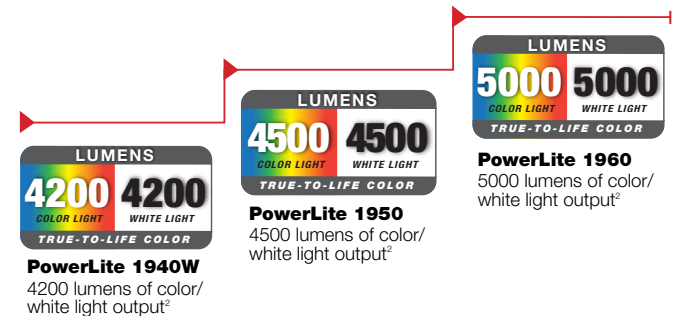

### Always look for Color Light Output when choosing a projector

- For optimum image quality and performance, the projector you choose should offer equal levels of color and white light output
- When the two measurements are not identical, images do not look balanced
- Whites may be brighter, making the colored areas look dull and flat
- The combination of color richness (color light output) and brightness (white light output) is as critical as the combination of bass and treble would be when purchasing audio equipment

### WXGA (1280 x 800), 16:10 native resolution — for remarkable detail and widescreen convenience (1940W only)

The widescreen PowerLite 1940W is ideal for use with the latest-generation widescreen computers and great for projecting a wide variety of content. Its native 16:10 aspect ratio allows you to fully utilize the capabilities of your widescreen computer, giving you 30% more image area than a 4:3 image.

The PowerLite 1940W also allows you to display 4:3 content without losing image quality.

PowerLite 1950/1960



XGA (1024 x 768) resolution

PowerLite 1940W



WXGA (1280 x 800) resolution



Actual photographs of images taken from two competing projectors run in default mode. Price, resolution and brightness (white light output) are the same for both projectors.

# Advanced Networking Features and Cutting Edge Technology

## EPSON iProjection App via Networked Projector

Connect your projector via an RJ-45 cable to a wireless-capable network and you can project using your iOS device. Share your presentations files, photos and more from your iPad®/iPod®/iPhone® via the EPSON iProjection application. For more information, visit [www.epson.com/ProjectorApp](http://www.epson.com/ProjectorApp)



## Monitor/control projectors remotely

Easily monitor and control networked Epson projectors using the included EasyMP® software

- Schedule remote power on/off functionality; saves energy, money and time
- Check the status of each projector as part of your maintenance routine
- Access maintenance alerts for connected projectors, right from your office
- Crestron RoomView enabled — monitor and control your projector with your existing RoomView software



## Message broadcasting<sup>5</sup>

- Broadcast customized images/alerts over the network for announcements or instructions
- Send messages to up to 1024 projectors simultaneously (message will overwrite the current screen content if the projector is being used, unless this function is disabled by the presenter)
- If the projector is off, message broadcasting will turn it on and display the message

## Digital DisplayPort and HDMI connectivity

DisplayPort and an HDMI digital display interface enable the projector to easily project digital content including video and audio. Both are compatible with the latest laptops, Blu-ray®, DVD and other media players. Future proof your digital content.



## Split Screen<sup>1</sup> feature

Project two images (video or still) side-by-side from two different sources simultaneously. You can choose from three layout options, swap the images/display sizes, choose the source for the audio and even display closed captioning if the source signal includes it.



Layout Option-1: 50-50% Split Screen



Layout Option-2: Main image on the left



Layout Option-3: Main image on the right

## Multi-PC projection

EPSON Multi-PC Collaboration utility allows you to display four individual PC screens simultaneously over the network with up to 32 PCs connected to the same projector. This feature is a great tool for meetings or classroom projects where multiple users can present and share ideas and graphics.




## Ease of Use

### PC-free presentations including PDFs


Just plug your USB hard drive into the USB port, and you are ready to display documents and images stored on your USB drive. Present a slideshow without having to connect to a PC. Compatible with the following file formats: PDF, JPEG, BMP, GIF, PNG

### Horizontal keystone slider

Epson's horizontal image correction means you can project a rectangular image from almost any angle. Just move the easy-slide control bar to make the necessary adjustments. Your projector can be off to the side and above or below the screen, while your presentation is front and center.



Without horizontal keystone



With horizontal keystone

## Fast, easy setup and control

- USB Plug 'n Play — simply connect your PC to the projector and start presenting
- 1.6x optical zoom — offers great positioning flexibility to fit large or small rooms
- A/V Mute Slide — control your presentation; it's right at your fingertips
- Sleep Mode — set from 1 to 30 minutes to save energy when the A/V Mute Slide is closed or no signal is detected
- Direct Power On/Off — power the projector on and off with the flip of a wall switch
- Instant Off — no cool down time required, so it is ready to shut down when you are

## The EPSON 1900 series multimedia projectors

### Model Comparison

**PowerLite 1940W**  
Widescreen resolution

4200 lumens<sup>2</sup>  
WXGA Resolution  
1280 x 800



**PowerLite 1950**  
Brighter images

4500 lumens<sup>2</sup>  
XGA Resolution  
1024 x 768



**PowerLite 1960**  
Step up to ultra-bright images

5000 lumens<sup>2</sup>  
XGA Resolution  
1024 x 768



## Better Products for a Better Future™

For more information on Epson's environmental programs, go to [eco.epson.com](http://eco.epson.com)

### Eco Features

- Energy-efficient 3LCD light engine<sup>4</sup>
- Recyclable product<sup>6</sup>
- Epson America, Inc. is a SmartWay<sup>SM</sup> Transport Partner<sup>7</sup>





## Full Featured Performance


### Award-winning Faroudja DCDi Cinema for advanced video quality

Faroudja DCDi Cinema is a video enhancement technology, used primarily for film viewing, that produces exceptional image quality without introducing artifacts. Faroudja developed DCDi (Directional Correlational Deinterlacing) to reduce jagged images by using a unique algorithm. This algorithm, in combination with the technology's decoding, deinterlacing and enhancement features, won an Emmy Award from the National Academy of Television Arts and Sciences.




### Advanced color adjustments

For special projection material such as high-quality photographs or artwork, users can adjust the hue, saturation and brightness for six colors, RGBCMY (Red, Green, Blue, Cyan, Magenta, Yellow).

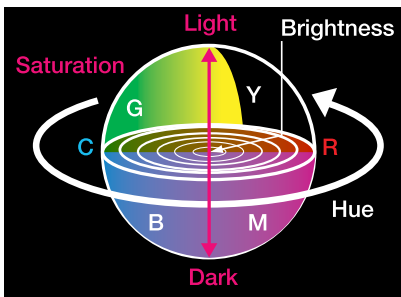

### DICOM Simulation Mode<sup>3</sup>

DICOM (Digital Imaging and Communication in Medicine) is a standard for handling, storing, printing and transmitting medical imaging information. The projector's DICOM Simulation Mode enables users to reproduce images with an advanced grayscale level that simulates DICOM Part 14. This mode is ideal for viewing grayscale medical images, such as X-rays, for training and educational purposes.

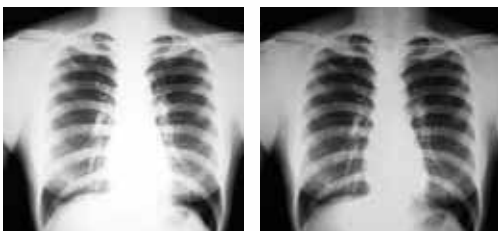

▲ Normal Mode

▲ DICOM Simulation Mode


## PowerLite 1940W, 1950 and 1960 Features

- **Bright, brilliant performance** — 4200 lumens color/white light output<sup>2</sup> (1940W), 4500 lumens color/white light output<sup>2</sup> (1950) and 5000 lumens color/white light output<sup>2</sup> (1960)
- **Remarkable detail** — XGA resolution (1950 and 1960); widescreen WXGA resolution (1940W); 3LCD, 3-chip technology; up to 3000:1 contrast ratio
- **Powerful video performance** — Faroudja DCDi Cinema, deinterlacing, noise reduction and sharpness enhancement for ultra-smooth video
- **Digital DisplayPort and HDMI connectivity** — easily transmit both audio and video
- **Split Screen<sup>1</sup> feature** — project two images (video or still) side-by-side from two different sources simultaneously
- **Multi-PC projection** — display up to four individual screens simultaneously over the network to a total of 32 users
- **PC-free slideshows** — display images from your USB hard drive (supports PDF, JPEG, BMP, GIF and PNG files)
- **Network monitor and control** — included EPSON monitor software allows for remote monitor and control of EPSON networked projectors; also compatible with Crestron<sup>®</sup> RoomView<sup>®</sup>
- **Message broadcasting<sup>5</sup>** — broadcasts customized images/alerts over the network for announcements or instructions
- **EPSON iProjection™** — share files and photos from mobile Apple<sup>®</sup> devices via your networked EPSON projector
- **Automatic image adjustments** — automatic vertical keystone correction for greater positioning flexibility
- **Horizontal keystone slider tool** — adjust the horizontal keystone with a single gesture; allows for greater positioning flexibility
- **DICOM Simulation Mode<sup>3</sup>** — ideal for viewing grayscale images, such as X-rays, for training and educational purposes
- **Precision color** — 6-axis color adjustment to control hue, saturation and brightness
- **Instant Off<sup>®</sup>** — no cool-down time required, so it's ready to shut down when you are

# PowerLite® 1940W, 1950, 1960

## Multimedia Projectors

Product Name	Product Code	UPC
PowerLite 1940W	V11H474020	0 10343 90072 1
PowerLite 1950	V11H491020	0 10343 90071 4
PowerLite 1960	V11H473020	0 10343 90073 8
Genuine EPSON Lamp	V13H010L75	0 10343 90015 8
Replacement Air Filter	V13H134A41	0 10343 90013 4

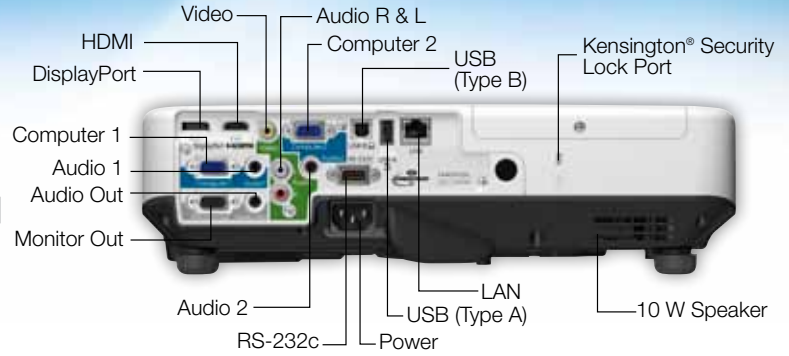

### Specifications

**Projection System**  
High-aperture EPSON 3LCD, 3-chip technology

**Projection Method**  
Front/ceiling mount, table

**LCD Driving Method**  
EPSON Poly-silicon TFT Active Matrix

**Pixel Number**  
PowerLite 1940W: 1,024,000 x 3LCDs  
PowerLite 1950: 786,432 x 3LCDs  
PowerLite 1960: 786,432 x 3LCDs

**Color Light Output\***  
PowerLite 1940W: 4200 lumens  
PowerLite 1950: 4500 lumens  
PowerLite 1960: 5000 lumens

**White Light Output\* (ISO 21118 standard)**  
PowerLite 1940W: 4200 lumens  
PowerLite 1950: 4500 lumens  
PowerLite 1960: 5000 lumens

**Aspect Ratio**  
PowerLite 1940W: Native 16:10  
PowerLite 1950: Native 4:3  
PowerLite 1960: Native 4:3

**Native Resolution**  
PowerLite 1940W: WXGA (1280 x 800)  
PowerLite 1950: XGA (1024 x 768)  
PowerLite 1960: XGA (1024 x 768)

**Contrast Ratio (Normal, Dynamic Mode)**  
Up to 3000:1

**Color Reproduction**  
16.77 million colors

**Lamp Type**  
245 W UHE

**Lamp Life\***  
Up to 4000 hours (ECO Mode)  
Up to 2500 hours (Normal Mode)

**Brightness Uniformity (typical)**  
89%

**Pixel Arrangement**  
Cross stripe

### Projection Lens

**Screen Throw Ratio Range**  
1.38 – 2.24

**Size (projected distance)**  
PowerLite 1940W: 29" – 280"  
PowerLite 1950: 30" – 300"  
PowerLite 1960: 30" – 300"

**Type**  
Manual zoom/focus  
**F-number:** 1.51 – 1.99

**Focal Length**  
18.2 mm – 29.2 mm

**Zoom Ratio**  
Optical zoom 1.0 – 1.6

**Keystone Correction**  
Vertical: -30 degrees to +30 degrees  
Horizontal: -30 degrees to +30 degrees

### Video

**Video Standards**  
Analog: NTSC/NTSC4.43/PAL/M-PAL/N-PAL/  
PAL60/SECAM  
HDMI: 480i/576i/480p/576p/720p/1080i/1080p

**Video Processing**  
3D Y/C separation, 3D noise reduction, mosquito  
noise reduction  
DCDi – Directional Correlational Deinterlacing  
Motion-compensated Interlace-Progressive  
conversion (2:2, 3:2 film detection)  
Closed captioning

### Networking

**Connectivity**  
Wired: Integrated 10/100 Mbps

**Remote Control and Management**  
EasyMP Monitor  
AMX Duet and Device Discovery  
Crestron Integrated Partner and RoomView  
PJLink

### Interfaces

DisplayPort  
HDMI  
Computer: D-sub 15 pin x 2  
Video: RCA  
Wired Network: RJ-45  
Serial: RS-232c  
Monitor-Out: D-sub 15 pin  
USB (Type A): For PC-free and document camera  
USB (Type B): For computer

### Other

**Speaker:** 10 W mono  
**Audio Output:** 3.5mm Jack  
**Operating Temperature**  
41 ° to 95 °F (5 ° to 35 °C)  
**Power Supply Voltage**  
100 – 240 V ±10%, 50/60 Hz AC

**Power Consumption**  
1940W – 311 W  
1950 – 353 W  
1960 – 353 W  
3.8 W standby (Network on)  
0.5 W standby (Network off)

**Fan Noise**  
37 dB (Normal Mode)  
29 dB (ECO Mode)

**Security**  
Kensington – style lock provision, anchor  
(metal) bar for security lock or cable

### Dimensions (W x D x H)

**Excluding feet**  
14.8" x 10.7" x 3.6" (377 x 271 x 93 mm)  
**Weight**  
8.5 lb (3.9 kg)

### Remote Control

**Features**  
Color mode, brightness, contrast, tint, color  
saturation, sharpness, input signal, sync, source  
search, Split Screen<sup>1</sup>

**Operating Angle**  
Front: Upper/lower 0 to +16 degrees  
Left/Right: N/A  
Rear: N/A

**Operating Distance**  
39" – 138"

### Support

**The EPSON Connection™**  
Pre-sales support  
U.S. and Canada 800-463-7766  
Internet website [www.epson.com](http://www.epson.com)

**Service Programs**  
Two-year projector limited warranty, 90-day  
limited lamp warranty, EPSON Road Service  
program and PrivateLine® dedicated toll-free  
support (U.S. and Canada only)

### What's in the Box

A PowerLite projector, power cable, computer  
cable, projector remote control, batteries, user  
manual CD, Quick Setup Sheet, PrivateLine  
support card, password protection sticker,  
monitor and control CD

### Optional Accessories

Genuine EPSON lamp	V13H010L75
Replacement air filter	V13H134A41
Replacement remote control	1566064
Universal projector ceiling mount	ELPMBPJF
Adjustable suspended ceiling channel kit	ELPMBP01
False ceiling plate kit	ELPMBP02
Kensington security lock	ELPSL01
Carrying case	V12H001K65

### Packaging Specifications

**PowerLite 1940W, 1950, 1960**  
Dimensions: 20.35" x 13.46" x 7.7" (W x D x H)  
Weight: 12.3 lbs (5.5kg)

**Genuine EPSON Lamp**  
Dimensions: 6.1" x 5.4" x 5.5" (W x D x H)  
Weight: 0.9 lbs (0.42kg)  
Master Carton  
Dimensions: 28.1" x 12.9" x 6.4" (W x D x H)  
Weight: 11.4 lbs (5.17kg)  
Quantity: 10

**Replacement Air Filter**  
Dimensions: 7.9" x 3.1" x 1.0" (W x D x H)  
Weight: 0.1 lbs (46g)  
Master Carton  
Dimensions: 11.1" x 8.1" x 3.3" (W x D x H)  
Weight: 1.4 lbs (0.64kg)  
Quantity: 10

1 Consult your user manual for input combinations.

2 Color and white light output will vary depending on mode selected. White light output measured using ISO 21118 standard.

3 This projector does not meet the DICOM standard Part 14 and should not be used as a medical diagnostic device.

4 Data source: ProjectorCentral.com Jan. 2012. Average of 1122 shipping models for which the manufacturers provided lumens and total power data, all resolutions and brightness levels. Energy efficiency was measured as wattage per lumen. It was measured for both 3LCD and 1-chip projectors in each of five brightness segments. 3LCD projectors averaged less required electricity per lumen in each of the five segments.

5 Works only with EPSON projectors that support presentation over the network capability.

6 See our website for convenient and reasonable recycling options at [www.epson.com/recycle](http://www.epson.com/recycle)

7 SmartWay is an innovative partnership of the U.S. Environmental Protection Agency that reduces greenhouse gases and other air pollutants and improves fuel efficiency.

8 Lamp life will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time.